



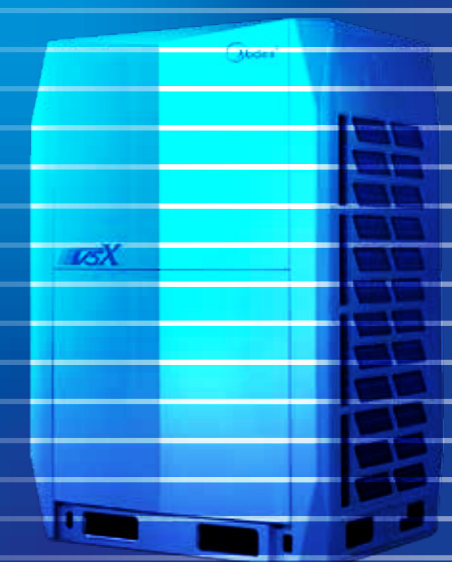

VRF 50Hz (V5X / V4+R / V4+W / V4+I / Mini VRF)

Commercial Air Conditioners 2020

2002-1V2001

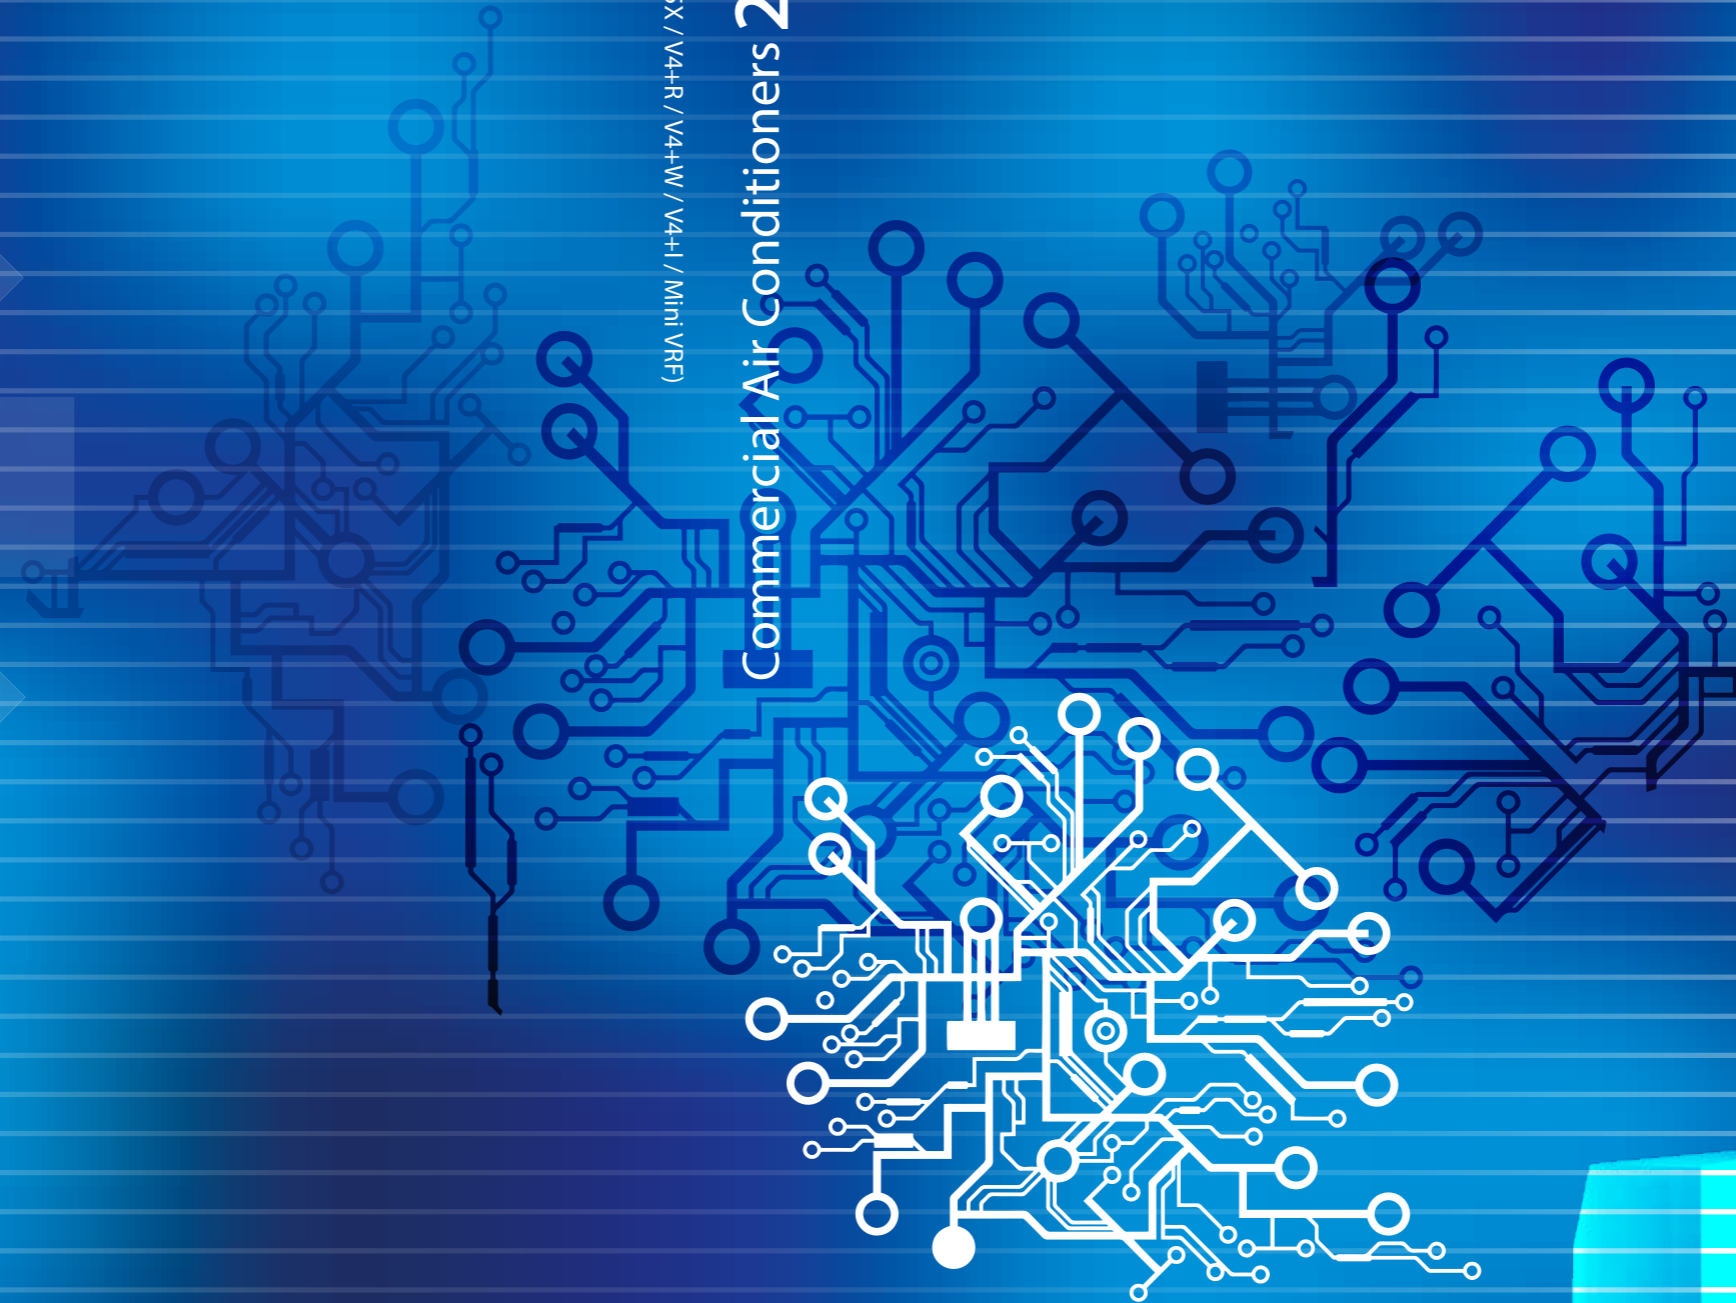

Commercial Air Conditioner Division Midea Group

Add.: Midea Headquarters Building, 6 Midea Avenue, Shunde, Foshan, Guangdong, China

Postal code: 528311

cac.midea.com global.midea.com



VRF 50/60Hz

V5X / VC Pro / V4+R / V4+W / V4+I / Mini VRF

Note: Product specifications change from time to time as product improvements and developments are released and may vary from those in this document.



Midea CAC

Midea CAC is a key division of the Midea Group, a leading producer of consumer appliances and provider of heating, ventilation and air conditioning solutions. Midea CAC has continued with the tradition of innovation upon which it was founded, and emerged as a global leader in the HVAC industry. A strong drive for advancement has created a groundbreaking R&D department that has placed Midea CAC at the forefront of a competitive field. Through these independent efforts and joint cooperation with other global enterprises, Midea has supplied thousands of innovative solutions to customers worldwide. We have three production bases: Shunde, Chongqing and Hefei.

MCAC Shunde: 38 product lines focusing on VRF, Split Products, Heat Pump Water Heaters, and AHU/FCU.

MCAC Chongqing: 14 product lines focusing on Water Cooled Centrifugal/Screw/Scroll Chillers, Air Cooled Screw/Scroll Chillers, and AHU/FCU.

MCAC Hefei: 11 product lines focusing on VRF, Chillers, and Heat Pump Water Heaters.

- 2020 >> A new generation 3-pipe heat recovery VRF will be launched in the middle of 2020.
- 2018-2019 >> Launched the All DC Inverter Cooling Only VC Pro VRF, ultra cool for hot regions
- 2017-2018 >> Launched the new generation VRF globally, leading in VRF market
- 2016 >> Acquired 80% stake in Clivet
- 2014-2015 >> Win FIFA World Cup Stadiums project in Brazil Beira Rio, Olympic Games Stadiums project in Brazil Rio de Janeiro and Africa games Stadiums project in Congo Brazzaville successively
- 2014 >> Launched the All DC Inverter V5X globally, outstanding product performance helps Midea leading VRF market
- 2011-2014 >> Launched the DC Inverter V4 Plus Series successively, complete product lines help Midea successfully enter the mainstream VRF market
- 2011-2012 >> J.V. with Carrier LA and Carrier India successively
- 2009 >> Launched the DC Inverter V4 globally
- 2008 >> Developed DC inverter technology with Toshiba
- 2000-2001 >> Cooperated with Toshiba and Copeland, enter VRF field
- 1999 >> Entered the CAC field

Midea Reference Projects

Midea has dedicated 20 years of innovation in VRF, it has complete VRF solutions. Midea VRF has been widely used in various fields, such as offices, school, hospital, sports, hotel, transportation and so on.

CEO Offices

- 📍 Country: Brazil
- 📍 City: Rio de Janeiro
- 📦 Outdoor Units: Water Cooled VRF
- 📦 Indoor Units: Duct & Cassette
- 📊 Total Capacity: 1,100HP

Hilton Barcelona Maria Cristina(Five Star)

- 📍 Country: Spain
- 📍 City: Barcelona
- 📦 Outdoor Units: Heat Recovery VRF
- 📦 Indoor Units: Duct & Cassette
- 📊 Total Capacity: 1,200HP

CT University

- 📍 Country: India
- 📍 City: Ludhiana
- 📦 Outdoor Units: Heat Pump VRF
- 📦 Indoor Units: Duct & Cassette
- 📊 Total Capacity: 1,332HP

Ain Al Fayda Emirati Housing Development-5000 Villas

- 📍 Country: UAE
- 📍 City: Al Ain
- 📦 Outdoor Units: Tropical Heat Pump VRF
- 📦 Indoor Units: Wall-mounted & Cassette
- 📊 Total Capacity: 80,000HP

2018 Russia World Cup Stadiums

- 📍 Country: Russia
- 📦 Products: Heat Pump VRF
- Place: Luzhniky Stadium (Final Match)
- Kaliningrad Stadium
- Central Stadium

Migros in Turkey

- 📍 Country: Turkey
- 📦 Outdoor Units: Heat Pump VRF
- 📦 Indoor Units: Duct, Cassette and Wall-mounted
- 📊 Total Capacity: 9000HP
- Completion Year: 2018

103 Hospital

- 📍 Country: Laos
- 📍 City: Vientiane
- 📦 Outdoor Units: Heat Pump VRF
- 📦 Indoor Units: Duct & Cassette
- 📊 Total Capacity: 1,560HP

Engineering Capability Midea Tool and Support

Midea dedicated to provide the best HVAC engineering support and solutions focused on effectively designed, built, supervised, and maintained throughout the lifecycle, providing our customers a faster, easier, and a more accurate way in everyday duties.



Midea Selection Software

Midea Selection Software enables an visual and fast selection, provides a comprehensive system design reports and calculations.




Revit Family

Midea REVIT is developed to make 3D designing of Midea products easier than the previous program. It enables engineers to check 3D images from designing stage and prevents possible issues of the installation stage.



CAD Drawing





CAD enables faster and a more accurate design of Midea products.

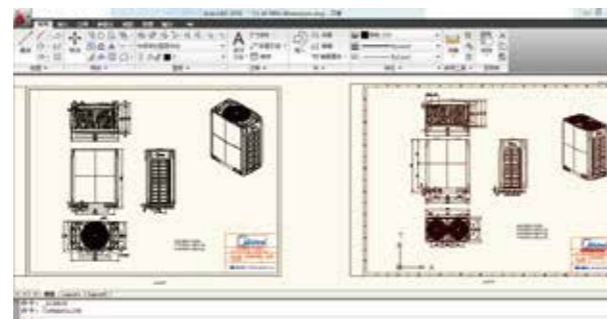





CFD (Computational Fluid Dynamics)

CFD Analysis is applied in areas of estimating: indoor airflow and temperature distribution. By running a simulation before construction, engineers estimate possible issues and find optimal solutions of malfunction that could occur after construction

Temperature distribution

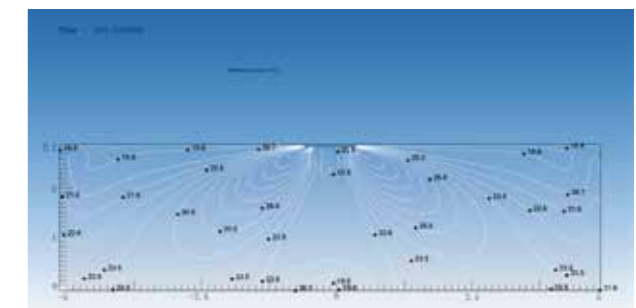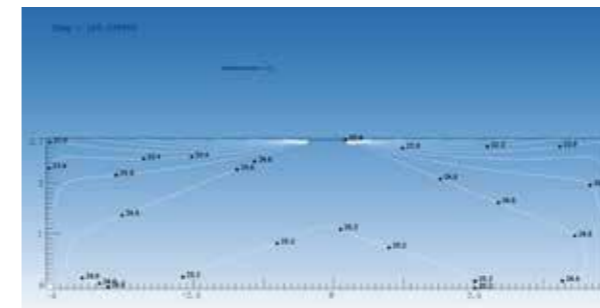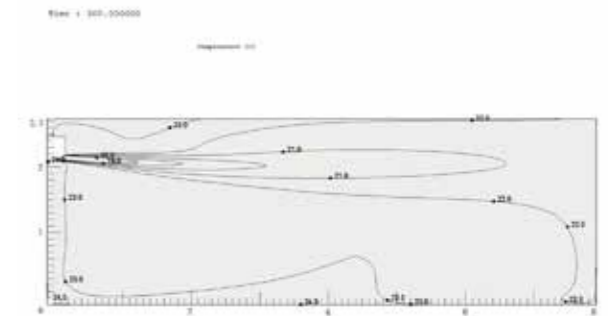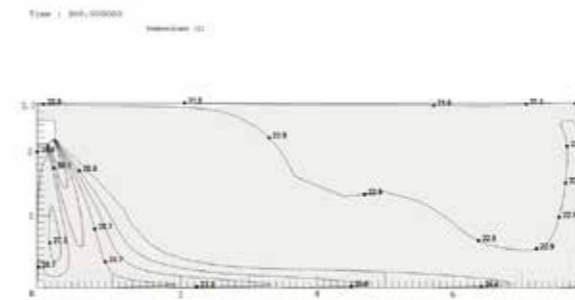

Airflow distribution

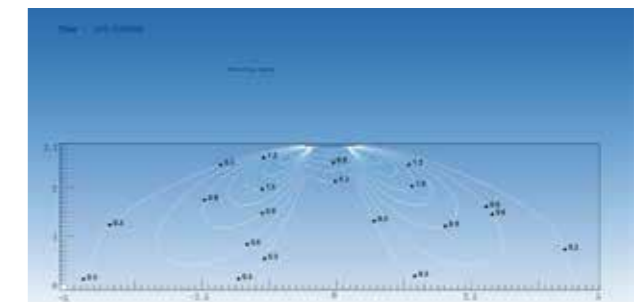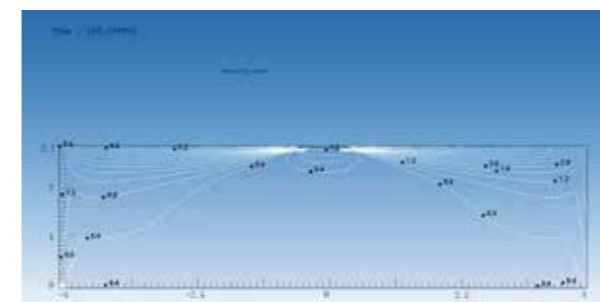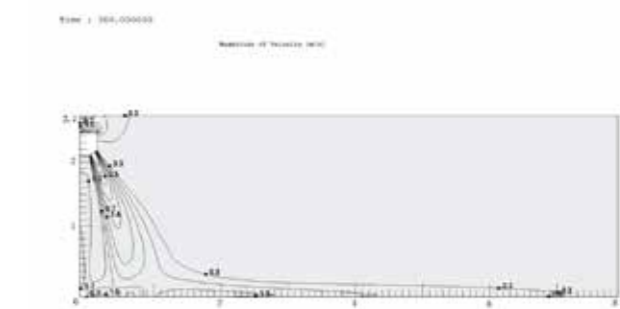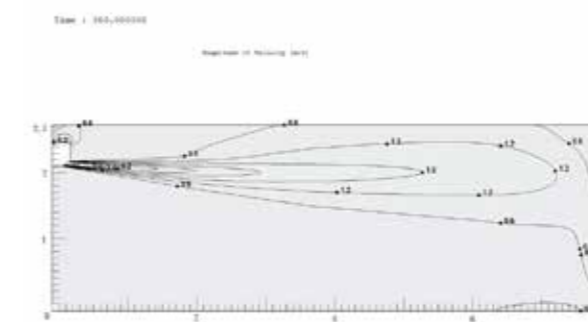




INDEX

CONTENTS

02 INDOOR UNITS

75 2nd Generation VRF Indoor Units

87 1st Generation VRF Indoor Units



01

OUTDOOR UNITS

25 VRF V5 X Series

31 VRF VC Pro Series

47 VRF V4 Plus R Series

55 VRF V4 Plus W Series

59 VRF V4 Plus I Series

61 VRF Mini Series

03 CONTROL SYSTEMS

113 Wireless Remote Controller

117 Wired Controller

123 Centralized Controller & Monitor

135 Network control Software & Gateways

151 Accessories




04 HRV

167 Heat Recovery Ventilator



05 BRANCH JOINTS

171 Branch Joints



VRF SYSTEM

VRF V5 **X** Series



Heat pump
 Max. 4 modules can be combined
 8~88HP
 All DC inverter compressors
 All DC fan motors

VRF V4 Plus **R**ecovery Series



Heat recovery
 Simultaneous cooling and heating operation in one system
 Max. 4 modules can be combined
 8~64HP
 All DC inverter compressors
 All DC fan motors

VRF **VC** Pro Series



Cooling only
 Max. 3 modules can be combined
 8~90HP
 All DC inverter compressors
 All DC fan motors

VRF V4 Plus **I**ndividual Series



Heat pump, cannot be combined
 7~16HP
 DC inverter compressor
 DC fan motor + AC fan motor

VRF V4 Plus Heat **W**ater Cooled Series



Water cooled
 Max. 3 modules can be combined
 8~36HP
 DC inverter compressor

VRF V4 Plus **M**ini Series







Heat pump and cooling only are both available, cannot be combined
 3~6.5HP
 DC inverter compressor
 All DC fan motors






OUTDOOR UNIT LINEUP

Connectable VRF












HP		8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40																					42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	89	90																																				
VRF V5 X SERIES 	Single unit	[Light Blue Bar]																																																																																																		
	Multi combination											[Purple Bar]																																																																																								
VRF VC Pro SERIES 	Single unit	[Light Blue Bar]																																																																																																		
	Multi combination											[Purple Bar]																																																																																								
VRF V4 PLUS R SERIES 	Single unit	[Light Blue Bar]																																																																																																		
	Multi combination					[Purple Bar]																																																																																														
VRF V4 PLUS W SERIES 	Single unit	[Light Blue Bar]																																																																																																		
	Multi combination				[Purple Bar]																																																																																															

Single VRF

HP		2.5	3	4	4.5	5	6	6.5	7	8	9	10	12	14	16	
VRF MINI SERIES (HEAT PUMP) 	Single unit	[Light Blue Bar]														
VRF MINI SERIES (COOLING ONLY) 	Single unit	[Light Blue Bar]				[Light Blue Bar]										
VRF V4 PLUS I SERIES 	Single unit								[Light Blue Bar]							

 Multi combination  Single unit

INDOOR UNIT LINEUP

kW			1.5	1.8	2.2	2.8	3.6	4.5	5.6	7.1			8.0	9.0	10.0	11.2	12.5	14.0	16.0	20.0	25.0	28.0	40.0	45.0	56.0	
Btu/h			5k	6k	7k	9k	12k	15k	19k	24k			27k	30k	34k	38k	42k	48k	55k	68k	85k	96k	136k	154k	191k	
Cassette	One-way cassette																									
	Two-way cassette																									
	Four-way cassette																									
	Compact four-way cassette																									
Duct	Medium static pressure																									
	High static pressure																									
	Fresh air processing unit																									
Wall mounted																										
Ceiling & floor																										
Floor standing -concealed																										
Floor standing - exposed																										
Console																										

2nd Gen. Indoor Units¹
 1st Gen. Indoor Units²

- Notes:
1. Fan motors of this series are all DC type.
 2. Fan motors of this series are AC type except for the wall mounted and console units.



OUTDOOR UNITS


VRF V5 X SERIES
VRF VC Pro SERIES
VRF V4 PLUS R SERIES
VRF V4 PLUS W SERIES
VRF V4 PLUS I SERIES
VRF MINI SERIES



1. High Efficiency DC Inverter Compressor


Midea VRF Air Conditioner achieves the industry's top class energy efficiency in cooling and heating by utilizing DC inverter compressor, DC fan motor, and high efficiency heat exchanger.

The DC inverter compressor adopts innovative design and numerous high performance key parts which can reduce power consumption by 25%.

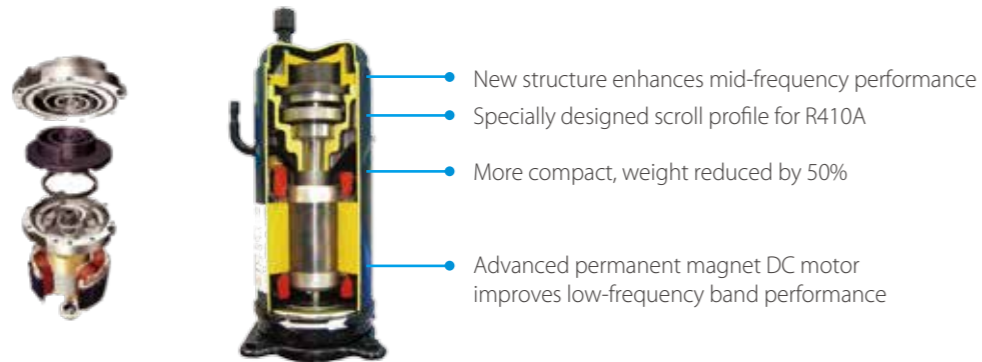

2. High Efficiency DC Fan Motor


The system controls the speed of the fan motor according to the system pressure and system load achieving the minimum power consumption.

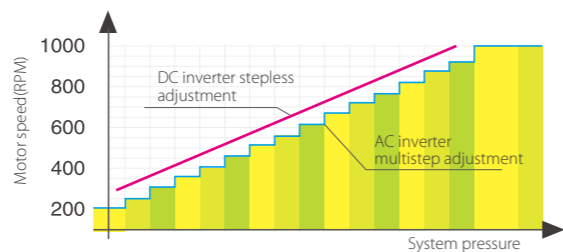

3. High Efficiency Heat Exchanger


Newly designed window type fins enlarge the heat exchange area and decrease air resistance, enhance heat exchange performance and save more energy.

Hydrophilic fins and internally threaded copper pipes optimize heat exchange efficiency.

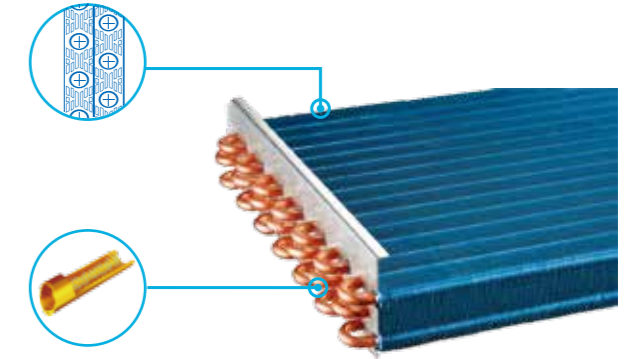

4. Newly Designed Fan

A new blade with sharp edges and a slight curve increases the airflow rate and lowers vibration and airflow resistance.

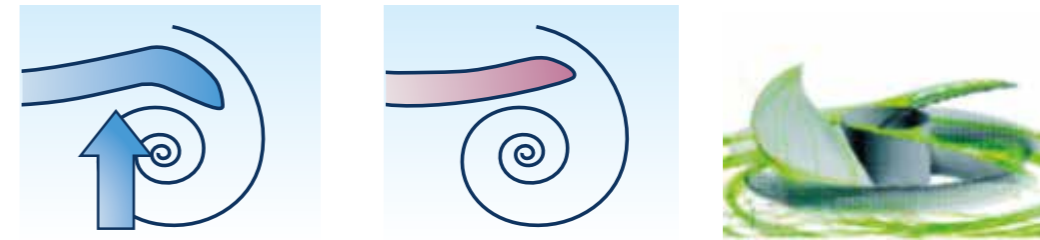

5. Multi Solenoid Valves Control

Multi solenoid valves control technology in one system. All the solenoid valves equipped in the unit ensure precise temperature control, stable and efficient running conditions and improved comfort.

6. Double EXVs Control

Double EXVs in one system, each EXV part achieves 480 Pulse rate to precisely adjust refrigerant flow.



Wide Application Range


Wide Capacity Range

Midea VRF has an extensive capacity ranging from 3HP to 88HP, meeting all customer requirements from small to large buildings.




Wide Range of Indoor Units

Midea provides 12 types and more 100 models of VRF indoor units to meet varied customer requirements in a wide range of locations including shopping malls, hospitals and airports.

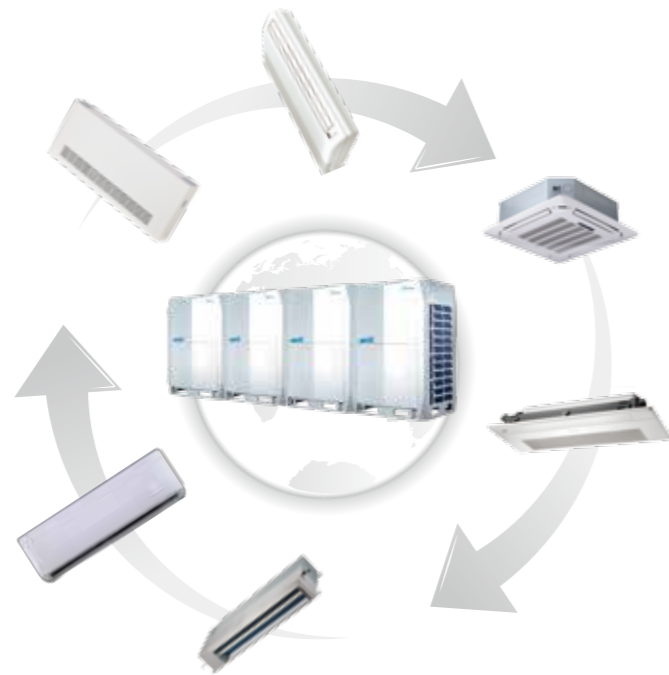

Wide Operation Range

The VRF system operates stably under extreme conditions, ranging from minus -20°C to 55°C.

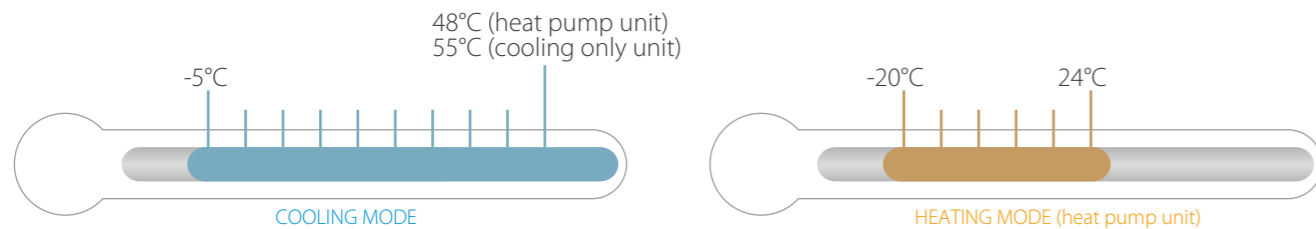

High Reliability

Duty Cycling

Duty cycling equalizes the running time of the outdoor units in a multiple-unit system and of the compressors in each unit, significantly extending compressor lifespan.



Backup Operation


In a multi-unit system, if one module fails, the other modules provide backup so that the system can continue operating.



Precise Oil Control Technology

Five stages of oil control technology ensure all outdoor compressor oil is always kept at a safe level, eliminating any compressor oil shortage problems.

- The 1st stage:** Compressor internal oil separation.
- The 2nd stage:** High-efficiency centrifugal oil separator (with separation efficiency of up to 99%) ensures that oil is separated from the discharge gas and returned to the compressors in a timely fashion.
- The 3rd stage:** Oil balance pipes between compressors ensure even oil distribution to keep compressors running normally.
- The 4th stage:** Oil balance pipes among modules ensure even oil distribution among modules.
- The 5th stage:** Auto oil return program monitors the running time and system status to ensure reliable oil return.

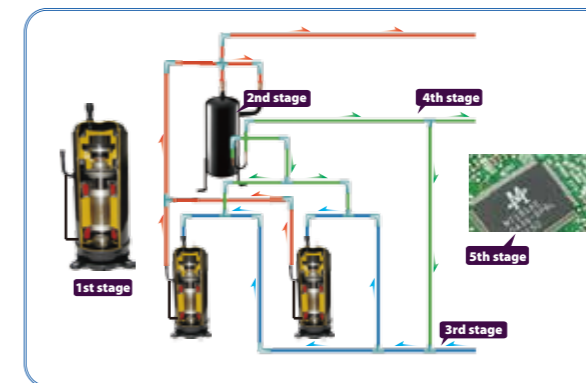


Enhanced Comfort

Night Silent Operation Mode

Night Silent Mode feature which is easily set on the PCB board allows the unit to be set to various time options during Non-peak and Peak operation time minimizing the units noise output.

Night Silent operation will be activated X hours after the peak daytime temperature, and it will go back to normal operation after Y hours.


- Mode 1→X: 6 hours, Y: 10 hours
- Mode 2→X: 8 hours, Y: 10 hours
- Mode 3→X: 6 hours, Y: 12 hours
- Mode 4→X: 8 hours, Y: 8 hours

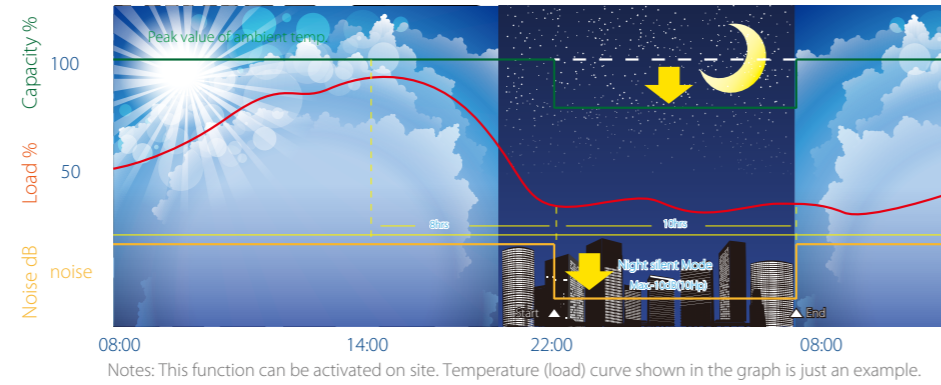

Intelligent Defrosting Technology


Intelligent defrosting program will judge the defrosting time according to the system real requirement, reduce heating loss caused by unnecessary defrosting and create more comfort. Defrosting time can be shortened to 4 min. due to the specialized defrosting valve.

*This function is only available for heat pump series.

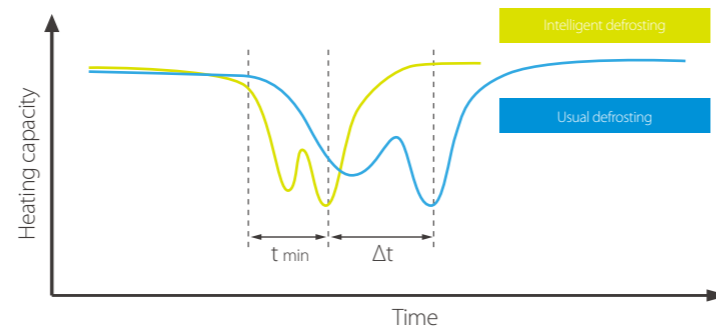

Rapid Warm Up and Cool Down Function


The DC Inverter Compressor system reaches full load rapidly providing less temperature fluctuation and an improved living environment.

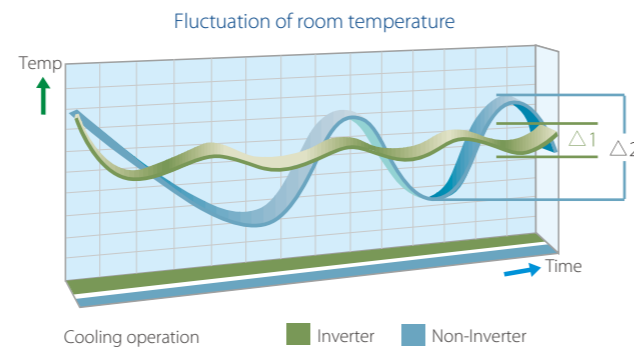

Easy Installation and Service

Simple Communication Wiring

Indoor centralized controller can be connected to either the indoor or the outdoor units. A single set of wiring can be used for system and network communication, making installation quicker and easier.

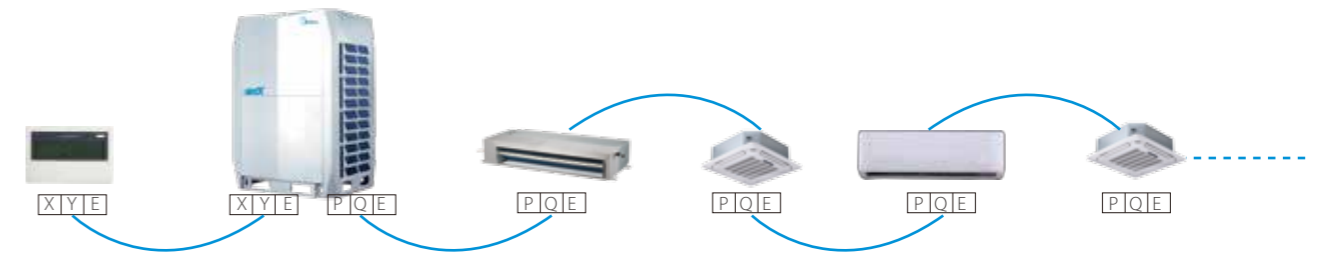

Auto Addressing

Outdoor unit can distribute addresses to indoor units automatically. Remote and wired controllers can be used to query or modify each indoor unit's address.



Easy Maintenance

Special features that increase ease of maintenance include a control box inspection window for viewing the system status, a self-diagnosis function that speeds fault analysis, and the positioning of the compressor adjacent to the casing, which simplifies inspection and enables valve or compressor parts to be replaced easily.



Midea Unified Branch Piping

The unified Midea branch piping system is especially designed for simple installation and it also has specifically been designed to optimize refrigerant flow.



*Indoor branch box is only available for Mini VRF Series.

Anti-corrosion Protection

Outdoor units are given anti-corrosion treatment for non-extreme conditions as standard and can also be customized with heavy anti-corrosion treatment on steel sheets, grills, coil fins, electric control box case and screws/bolts for surface protection against corrosive air, acid rain and saline air (for installations in coastal regions) to extend overall useful life.

The integrity of the anti-corrosion treatment is ensured by subjecting major components and parts to salt mist testing, moisture and heating testing and light aging testing.

Motor

Standard products:
72h of neutral salt mist

Heavy anti-corrosion products:
240h of neutral salt mist



Painted Sheet Metal

Standard products:
500h of neutral salt mist
1000h of moisture and heating test
500h of light aging test

Heavy anti-corrosion products:
1000h of neutral salt mist
2000h of moisture and heating test
720h of light aging test



Screws / Bolts / Gaskets


Standard products:
300h of neutral salt mist

Heavy anti-corrosion products:
720h of neutral salt mist

Heat Exchanger Aluminum Foil

Standard products:
72h of neutral salt mist

Heavy anti-corrosion products:
1000h of neutral salt mist
140h of acid salt mist

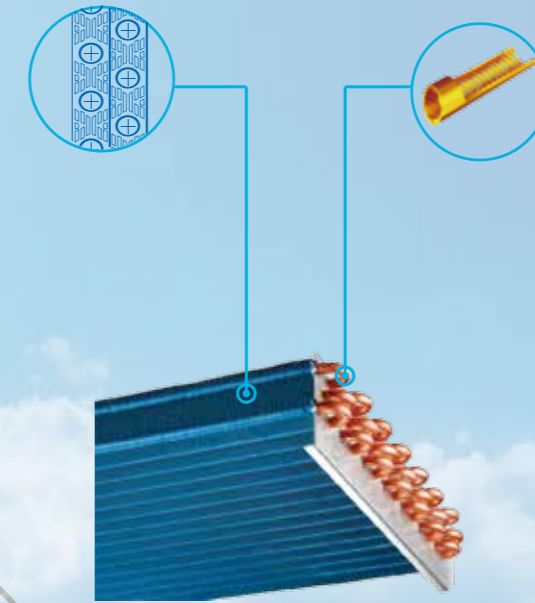

Copper

Standard products:
24h of neutral salt mist

Heavy anti-corrosion products:
120h of neutral salt mist

Electric Control Box Case

Standard products:
96h of neutral salt mist

Heavy anti-corrosion products:
240h of neutral salt mist



Compressor / Motor Bolts

Standard products:
72h of neutral salt mist

Heavy anti-corrosion products:
168h of neutral salt mist

UL Anti-Corrosion Certificate

It has been certified by UL that our VRF outdoor unit can withstand 27 years of simulated severe corrosion under a salt contaminated traffic environment.

Note: UL Anti-Corrosion certificate is only available for VRF V5X Series.

Outdoor Unit can resist 27 years of simulated severe corrosion under a salt contaminated traffic environment



Indoor Units
VRF indoor units

Fresh Air Processing Unit
100% fresh air supply

Ventilation
Heat recovery ventilator (HRV)

AHU Connection Kit
Connect to other brand AHU

Control Systems
Smart control systems




VRF V5 X Series Heat Pump

Optimized design for small to large buildings

- ▶ ALL DC inverter compressors
- ▶ ALL DC fan motors
- ▶ Capacity up to 88HP
- ▶ Connectable indoor units quantity up to 64
- ▶ ESP up to 60Pa
- ▶ Cycle duty operation
- ▶ Backup operation
- ▶ Precise oil control technology
- ▶ Advanced silence technology
- ▶ Intelligent defrosting technology
- ▶ Simple communication wiring
- ▶ Auto addressing
- ▶ Easy maintenance

High EER and COP Values


DC compressors and fan motors together with a high-efficiency heat exchanger combine to give the V5 X Series top-class energy efficiency in cooling and heating.

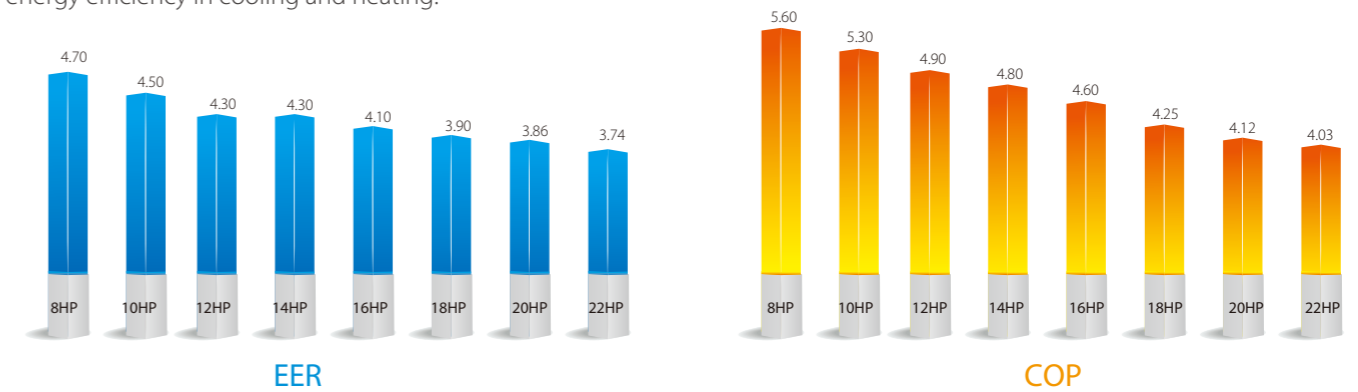

Long Piping Capability

Piping length	Capability
Total piping length	1000m
Longest length - actual (equivalent)	175m (200m)
Longest length after first branch	90m*
Largest height difference between indoor and outdoor units - ODU up (down)	90m (110m)
Largest height difference between indoor units	30m

*The longest length after first branch is 40m as standard but can be extended to up to 90m under certain conditions. Please contact your local Midea dealer for further information.

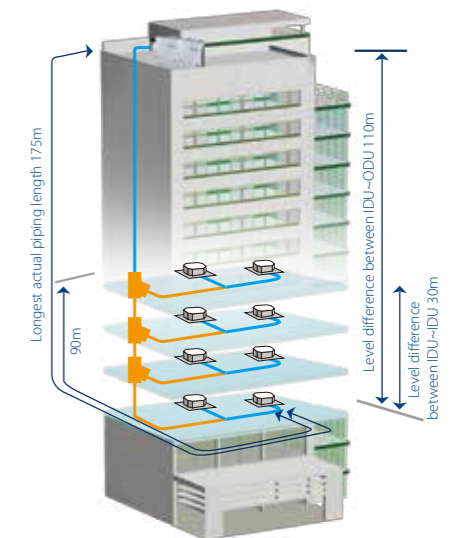

Rotatable Electric Control Box

The newly designed rotating control box can be rotated up to 150 degrees to provide access to the pipeline system for inspection and maintenance without the need to remove the control box.



VRF V5 X Series - Heat Pump

380~415V, 3N, 50(60)Hz / 220V, 3Ph, 60Hz / 460V, 3Ph, 60Hz



HP	8		10		12	
Model (380~415V, 3N, 50(60)Hz)	MV5-X252W/V2GN1		MV5-X280W/V2GN1		MV5-X335W/V2GN1	
Model (220V, 3Ph, 60Hz)	MV5-X252W/V2DN1		MV5-X280W/V2DN1		MV5-X335W/V2DN1	
Model (460V, 3Ph, 60Hz)	MV5-X252W/V2ZN1		MV5-X280W/V2ZN1		MV5-X335W/V2ZN1	
Cooling	Capacity	kW	25.2	28.0	33.5	
	Power input	kW	5.36	6.22	7.79	
	EER		4.7	4.5	4.3	
Heating	Capacity	kW	27.0	31.5	37.5	
	Power input	kW	4.82	5.94	7.65	
	COP		5.6	5.3	4.9	
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity				
	Max. quantity	13	16	20		
Compressor	Type	DC inverter				
	Quantity	1				
Fan motor	Type	DC motor				
	Quantity	1				
	Static pressure	Pa	0-20 (default) 20-60 (customized)			
Refrigerant	Type	R410A				
	Factory charging	kg	9	9	11	
Pipe connections	Liquid pipe	mm	Φ12.7			Φ15.9
	Gas pipe	mm	Φ25.4			Φ28.6
	Oil balance pipe	mm	Φ6.35			
	Airflow rate	m ³ /h	12000			
Sound pressure level	dB(A)	58	59	60		
Net dimension (WxHxD)	mm	990x1635x790				
Packing size (WxHxD)	mm	1090x1805x860				
Net weight (380V/220V)	kg	219			237	
Net weight (460V)	kg	229			247	
Gross weight (380V/220V)	kg	234			252	
Gross weight (460V)	kg	249			267	
Operating temperature range	°C	Cooling: -5-48; Heating: -20-24				



HP	14		16		18		20		22			
Model (380~415V, 3N, 50(60)Hz)	MV5-X400W/V2GN1		MV5-X450W/V2GN1		MV5-X500W/V2GN1		MV5-X560W/V2GN1		MV5-X615W/V2GN1			
Model (220V, 3Ph, 60Hz)	MV5-X400W/V2DN1		MV5-X450W/V2DN1		MV5-X500W/V2DN1		MV5-X560W/V2DN1		MV5-X615W/V2DN1			
Model (460V, 3Ph, 60Hz)	MV5-X400W/V2ZN1		MV5-X450W/V2ZN1		MV5-X500W/V2ZN1		MV5-X560W/V2ZN1		MV5-X615W/V2ZN1			
Cooling	Capacity	kW	40.0	45.0	50.0	56.0	61.5					
	Power input	kW	9.3	10.98	12.82	14.51	16.44					
	EER		4.3	4.1	3.9	3.86	3.74					
Heating	Capacity	kW	45.0	50.0	56.0	63.0	69.0					
	Power input	kW	9.38	10.87	13.18	15.29	17.12					
	COP		4.8	4.6	4.25	4.12	4.03					
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity										
	Max. quantity	23	26	29	33	36						
Compressor	Type	DC inverter										
	Quantity	2										
Fan motor	Type	DC motor										
	Quantity	2										
	Static pressure	Pa	0-20 (default) 20-60 (customized)									
Refrigerant	Type	R410A										
	Factory charging	kg	13					16				
Pipe connections	Liquid pipe	mm	Φ15.9			Φ19.1			Φ19.1			
	Gas pipe	mm	Φ31.8			Φ31.8			Φ31.8			
	Oil balance pipe	mm	Φ6.35									
	Airflow rate	m ³ /h	14000					16000				
Sound pressure level	dB(A)	62					63					
Net dimension (WxHxD)	mm	1340x1635x790										
Packing size (WxHxD)	mm	1405x1805x855										
Net weight (380V/220V)	kg	297		305		340		340				
Net weight (460V)	kg	326		334		369		358				
Gross weight (380V/220V)	kg	315		323		358		358				
Gross weight (460V)	kg	353		361		396		396				
Operating temperature range	°C	Cooling: -5-48; Heating: -20-24										

Notes:

Capacities are based on the following conditions:

Cooling: Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB; Heating: Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB.

Piping length: Interconnecting piping length is 7.5m, level difference is zero.

Connection piping diameter of single-unit is the stop valve diameter of the unit.

Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.

VRF V5 X Series - Heat Pump

380~415V, 3N, 50(60)Hz / 220V, 3Ph, 60Hz / 460V, 3Ph, 60Hz



HP	24		26		28		30		32		34			
Model (380~415V, 3N, 50(60)Hz)	MV5-X670W/V2GN1		MV5-X730W/V2GN1		MV5-X780W/V2GN1		MV5-X840W/V2GN1		MV5-X895W/V2GN1		MV5-X950W/V2GN1			
Model (220V, 3Ph, 60Hz)	MV5-X670W/V2DN1		MV5-X730W/V2DN1		MV5-X780W/V2DN1		MV5-X840W/V2DN1		MV5-X895W/V2DN1		MV5-X950W/V2DN1			
Model (460V, 3Ph, 60Hz)	MV5-X670W/V2ZN1		MV5-X730W/V2ZN1		MV5-X780W/V2ZN1		MV5-X840W/V2ZN1		MV5-X895W/V2ZN1		MV5-X950W/V2ZN1			
Cooling	Capacity	kW	67.0	73.0	78.0	84.0	89.5	95.0						
	Power input	kW	15.58	17.2	19.04	20.73	22.67	24.23						
	EER		4.3	4.24	4.1	4.05	3.95	3.92						
Heating	Capacity	kW	75.0	81.5	87.5	94.5	100.5	106.5						
	Power input	kW	15.31	16.81	19.12	21.23	23.06	24.77						
	COP		4.9	4.85	4.58	4.45	4.36	4.3						
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity												
	Max. quantity	39	43	46	50	53	56							
Compressor	Type	DC inverter												
	Quantity	3												
Fan motor	Type	DC motor												
	Quantity	3												
Refrigerant	Type	R410A												
	Factory charging	kg	11x2			9+13			9+16			11+16		
Pipe connections	Liquid pipe	mm	Φ15.9			Φ19.1			Φ19.1			Φ19.1		
	Gas pipe	mm	Φ28.6			Φ31.8			Φ31.8			Φ31.8		
	Oil balance pipe	mm	Φ6.35											
	Airflow rate	m ³ /h	24000			26000			28000			28000		
Sound pressure level	dB(A)	64												
Net dimension (WxHxD)	mm	(990x1635x790)x2				(990x1635x790)+(1340x1635x790)								
Packing size (WxHxD)	mm	(1090x1805x860)x2				(1090x1805x860)+(1405x1805x855)								
Net weight (380V/220V)	kg	237x2		219+297		219+305		219+340		237+340				
Net weight (460V)	kg	247x2		229+326		229+334		229+369		247+369				
Gross weight (380V/220V)	kg	252x2		234+315		234+323		234+358		252+358				
Gross weight (460V)	kg	267x2		249+353		249+361		249+396		267+396				
Operating temperature range	°C	Cooling: -5-48; Heating: -20-24												



HP	36		38		40		42		44		46			
Model (380~415V, 3N, 50(60)Hz)	MV5-X1000W/V2GN1		MV5-X1065W/V2GN1		MV5-X1115W/V2GN1		MV5-X1175W/V2GN1		MV5-X1230W/V2GN1		MV5-X1285W/V2GN1			
Model (220V, 3Ph, 60Hz)	MV5-X1000W/V2DN1		MV5-X1065W/V2DN1		MV5-X1115W/V2DN1		MV5-X1175W/V2DN1		MV5-X1230W/V2DN1		MV5-X1285W/V2DN1			
Model (460V, 3Ph, 60Hz)	MV5-X1000W/V2ZN1		MV5-X1065W/V2ZN1		MV5-X1115W/V2ZN1		MV5-X1175W/V2ZN1		MV5-X1230W/V2ZN1		MV5-X1285W/V2ZN1			
Cooling	Capacity	kW	100.0	106.5	111.5	117.5	123.0	128.5						
	Power input	kW	25.64	27.42	29.26	30.95	32.89	32.03						
	EER		3.9	3.88	3.81	3.8	3.74	4.01						
Heating	Capacity	kW	112.0	119.0	125.0	132.0	138.0	144.0						
	Power input	kW	26.35	27.99	30.3	32.41	34.24	32.43						
	COP		4.25	4.25	4.13	4.07	4.03	4.44						
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity												
	Max. quantity	59	63	64										
Compressor	Type	DC inverter												
	Quantity	4												
Fan motor	Type	DC motor												
	Quantity	4												
Refrigerant	Type	R410A												
	Factory charging	kg	13x2		13+16			16x2		11x2+16				
Pipe connections	Liquid pipe	mm	Φ19.1			Φ19.1			Φ19.1			Φ19.1		
	Gas pipe	mm	Φ31.8			Φ31.8			Φ31.8			Φ31.8		
	Oil balance pipe	mm	Φ6.35											
	Airflow rate	m ³ /h	32000			30000			32000			40000		
Sound pressure level	dB(A)	66												
Net dimension (WxHxD)	mm	(1340x1635x790)x2												
Packing size (WxHxD)	mm	(1405x1805x855)x2												
Net weight (380V/220V)	kg	305x2		297+340		305+340		340x2		237x2+340				
Net weight (460V)	kg	334x2		326+369		334+369		369x2		247x2+369				
Gross weight (380V/220V)	kg	323x2		315+358		323+358		358x2		252x2+358				
Gross weight (460V)	kg	361x2		353+396		361+396		396x2		267x2+396				
Operating temperature range	°C	Cooling: -5-48; Heating: -20-24												

Notes:

Capacities are based on the following conditions:

Cooling: Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB; Heating: Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB.

Piping length: Interconnecting piping length is 7.5m, level difference is zero.

Connection piping diameter of multi-unit is the main pipe connecting to the first indoor branch joint, in case of the total equivalent liquid length is less than 90m. If the total equivalent liquid length is more than 90m, please refer to technical manual to choose the connection piping diameter.

Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.

VRF V5 X Series - Heat Pump

380~415V, 3N, 50(60)Hz / 220V, 3Ph, 60Hz / 460V, 3Ph, 60Hz



HP			48	50	52	54	56	
Model (380~415V, 3N, 50(60)Hz)			MV5-X1345W/V2GN1	MV5-X1395W/V2GN1	MV5-X1455W/V2GN1	MV5-X1510W/V2GN1	MV5-X1565W/V2GN1	
Model (220V, 3Ph, 60Hz)			MV5-X1345W/V2DN1	MV5-X1395W/V2DN1	MV5-X1455W/V2DN1	MV5-X1510W/V2DN1	MV5-X1565W/V2DN1	
Model (460V, 3Ph, 60Hz)			MV5-X1345W/V2ZN1	MV5-X1395W/V2ZN1	MV5-X1455W/V2ZN1	MV5-X1510W/V2ZN1	MV5-X1565W/V2ZN1	
Combination type			10HP+16HP+22HP	10HP+18HP+22HP	10HP+20HP+22HP	10HP+22HPx2	12HP+22HPx2	
Cooling	Capacity	kW	134.5	139.5	145.5	151.0	156.5	
	Power input	kW	33.64	35.49	37.17	39.11	40.68	
	EER		4	3.93	3.91	3.86	3.85	
Heating	Capacity	kW	150.5	156.5	163.5	169.5	175.5	
	Power input	kW	33.93	36.24	38.36	40.19	41.9	
	COP		4.44	4.32	4.26	4.22	4.19	
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity						
	Max. quantity	64						
Compressor	Type	DC inverter						
	Quantity	5						
Fan motor	Type	DC motor						
	Quantity	5						
Refrigerant	Type	R410A						
	Factory charging	kg	9+13+16		9+16x2		11+16x2	
Pipe connections	Liquid pipe	mm	Φ19.1		Φ22.2		Φ25.4	
	Gas pipe	mm	Φ38.1		Φ41.3		Φ44.5	
	Oil balance pipe	mm	Φ6.35					Φ6.35
	Airflow rate	m ³ /h	42000		44000		60000	
Sound pressure level	dB(A)	67					69	
Net dimension (WxHxD)	mm	(990x1635x790)+(1340x1635x790)x2					(990x1635x790)+(1340x1635x790)x3	
Packing size (WxHxD)	mm	(1090x1805x860)+(1405x1805x855)x2					(1090x1805x860)+(1405x1805x855)x3	
Net weight (380V/220V)	kg	219+297+340		219+305+340		219+340x2	237+340x2	
Net weight (460V)	kg	229+326+369		229+334+369		229+369x2	247+369x2	
Gross weight (380V/220V)	kg	234+315+358		234+323+358		234+358x2	252+358x2	
Gross weight (460V)	kg	249+353+396		249+361+396		249+396x2	267+396x2	
Operating temperature range	°C	Cooling: -5-48; Heating: -20-24						



HP			58	60	62	64	66	68
Model (380~415V, 3N, 50(60)Hz)			MV5-X1615W/V2GN1	MV5-X1680W/V2GN1	MV5-X1730W/V2GN1	MV5-X1790W/V2GN1	MV5-X1845W/V2GN1	MV5-X1900W/V2GN1
Model (220V, 3Ph, 60Hz)			MV5-X1615W/V2DN1	MV5-X1680W/V2DN1	MV5-X1730W/V2DN1	MV5-X1790W/V2DN1	MV5-X1845W/V2DN1	MV5-X1900W/V2DN1
Model (460V, 3Ph, 60Hz)			MV5-X1615W/V2ZN1	MV5-X1680W/V2ZN1	MV5-X1730W/V2ZN1	MV5-X1790W/V2ZN1	MV5-X1845W/V2ZN1	MV5-X1900W/V2ZN1
Combination type			18HPx2+22HP	16HP+22HPx2	18HP+22HPx2	20HP+22HPx2	22HPx3	12HPx2+22HPx2
Cooling	Capacity	kW	161.5	168.0	173.0	179.0	184.5	190.0
	Power input	kW	42.08	43.86	45.71	47.4	49.33	48.47
	EER		3.84	3.83	3.78	3.78	3.74	3.92
Heating	Capacity	kW	181.0	188.0	194.0	201.0	207.0	213.0
	Power input	kW	43.47	45.11	47.42	49.53	51.36	46.13
	COP		4.16	4.17	4.09	4.06	4.03	4.62
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity						
	Max. quantity	64						
Compressor	Type	DC inverter						
	Quantity	6						
Fan motor	Type	DC motor						
	Quantity	6						
Refrigerant	Type	R410A						
	Factory charging	kg	13x2+16		13+16x2		16x3	11x2+16x2
Pipe connections	Liquid pipe	mm	Φ22.2		Φ25.4		Φ25.4	
	Gas pipe	mm	Φ41.3		Φ44.5		Φ44.5	
	Oil balance pipe	mm	Φ6.35					Φ6.35
	Airflow rate	m ³ /h	48000		46000		48000	56000
Sound pressure level	dB(A)	68					70	
Net dimension (WxHxD)	mm	(1340x1635x790)x3					(990x1635x790)x2+(1340x1635x790)x2	(1090x1805x860)x2+(1405x1805x855)x2
Packing size (WxHxD)	mm	(1405x1805x855)x3					(1405x1805x855)x4	
Net weight (380V/220V)	kg	305x2+340		297+340x2		305+340x2	340x3	237x2+340x2
Net weight (460V)	kg	334x2+369		326+369x2		334+369x2	369x3	247x2+369x2
Gross weight (380V/220V)	kg	323x2+358		315+358x2		323+358x2	358x3	252x2+358x2
Gross weight (460V)	kg	361x2+396		361+396x2		361+396x2	396x3	267x2+396x2
Operating temperature range	°C	Cooling: -5-48; Heating: -20-24						

Notes:
Capacities are based on the following conditions:
Cooling: Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB; Heating: Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB.
Piping length: Interconnecting piping length is 7.5m, level difference is zero.
Connection piping diameter of multi-unit is the main pipe connecting to the first indoor branch joint, in case of the total equivalent liquid length is less than 90m. If the total equivalent liquid length is more than 90m, please refer to technical manual to choose the connection piping diameter.
Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.

VRF V5 X Series - Heat Pump

380~415V, 3N, 50(60)Hz / 220V, 3Ph, 60Hz / 460V, 3Ph, 60Hz




HP			70	72	74	76	78	
Model (380~415V, 3N, 50(60)Hz)			MV5-X1960W/V2GN1	MV5-X2010W/V2GN1	MV5-X2070W/V2GN1	MV5-X2125W/V2GN1	MV5-X2180W/V2GN1	
Model (220V, 3Ph, 60Hz)			MV5-X1960W/V2DN1	MV5-X2010W/V2DN1	MV5-X2070W/V2DN1	MV5-X2125W/V2DN1	MV5-X2180W/V2DN1	
Model (460V, 3Ph, 60Hz)			MV5-X1960W/V2ZN1	MV5-X2010W/V2ZN1	MV5-X2070W/V2ZN1	MV5-X2125W/V2ZN1	MV5-X2180W/V2ZN1	
Combination type			10HP+16HP+22HPx2	10HP+18HP+22HPx2	10HP+20HP+22HPx2	10HP+22HPx3	12HP+22HPx3	
Cooling	Capacity	kW	196.0	201.0	207.0	212.5	218.0	
	Power input	kW	50.09	51.93	53.62	55.55	57.12	
	EER		3.91	3.87	3.86	3.83	3.82	
Heating	Capacity	kW	219.5	225.5	232.5	238.5	244.5	
	Power input	kW	51.06	53.36	55.48	57.31	59.02	
	COP		4.3	4.23	4.19	4.16	4.14	
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity						
	Max. quantity	64						
Compressor	Type	DC inverter						
	Quantity	7						
Fan motor	Type	DC motor						
	Quantity	7						
Refrigerant	Type	R410A						
	Factory charging	kg	9+13+16x2		9+16x3		11+16x3	
Pipe connections	Liquid pipe	mm	Φ25.4		Φ25.4		Φ25.4	
	Gas pipe	mm	Φ44.5		Φ44.5		Φ44.5	
	Oil balance pipe	mm	Φ6.35					Φ6.35
	Airflow rate	m ³ /h	58000		60000		60000	
Sound pressure level	dB(A)	69					69	
Net dimension (WxHxD)	mm	(990x1635x790)+(1340x1635x790)x3					(990x1635x790)+(1340x1635x790)x3	
Packing size (WxHxD)	mm	(1090x1805x860)+(1405x1805x855)x3					(1090x1805x860)+(1405x1805x855)x3	
Net weight (380V/220V)	kg	219+297+340x2		219+305+340x2		219+340x3	237+340x3	
Net weight (460V)	kg	229+326+369x2		229+334+369x2		229+369x3	247+369x3	
Gross weight (380V/220V)	kg	234+315+358x2		234+323+358x2		234+358x3	252+358x3	
Gross weight (460V)	kg	249+353+396x2		249+361+396x2		249+396x3	267+396x3	
Operating temperature range	°C	Cooling: -5-48; Heating: -20-24						



HP			80	82	84	86	88	
Model (380~415V, 3N, 50(60)Hz)			MV5-X2230W/V2GN1	MV5-X2295W/V2GN1	MV5-X2345W/V2GN1	MV5-X2405W/V2GN1	MV5-X2460W/V2GN1	
Model (220V, 3Ph, 60Hz)			MV5-X2230W/V2DN1	MV5-X2295W/V2DN1	MV5-X2345W/V2DN1	MV5-X2405W/V2DN1	MV5-X2460W/V2DN1	
Model (460V, 3Ph, 60Hz)			MV5-X2230W/V2ZN1	MV5-X2295W/V2ZN1	MV5-X2345W/V2ZN1	MV5-X2405W/V2ZN1	MV5-X2460W/V2ZN1	
Combination type			18HPx2+22HPx2	16HP+22HPx3	18HP+22HPx3	20HP+22HPx3	22HPx4	
Cooling	Capacity	kW	223.0	229.5	234.5	240.5	246.0	
	Power input	kW	58.53	60.31	62.15	63.84	65.78	
	EER		3.81	3.81	3.77	3.77	3.74	
Heating	Capacity	kW	250.0	257.0	263.0	270.0	276.0	
	Power input	kW	60.6	62.23	64.54	66.66	68.49	
	COP		4.13	4.13	4.07	4.05	4.03	
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity						
	Max. quantity	64						
Compressor	Type	DC inverter						
	Quantity	8						
Fan motor	Type	DC motor						
	Quantity	8						
Refrigerant	Type	R410A						
	Factory charging	kg	13x2+16x2		13+16x3		16x4	
Pipe connections	Liquid pipe	mm	Φ25.4		Φ25.4		Φ25.4	
	Gas pipe	mm	Φ44.5		Φ44.5		Φ44.5	
	Oil balance pipe	mm	Φ6.35					Φ6.35
	Airflow rate	m ³ /h	64000		62000		64000	
Sound pressure level	dB(A)	70					70	
Net dimension (WxHxD)	mm	(1340x1635x790)x4					(1340x1635x790)x4	
Packing size (WxHxD)	mm	(1405x1805x855)x4					(1405x1805x855)x4	
Net weight (380V/220V)	kg	305x2+340x2		297+340x3		305+340x3	340x4	
Net weight (460V)	kg	334x2+369x2		326+369x3		334+369x3	369x4	
Gross weight (380V/220V)	kg	323x2+358x2		315+358x3		323+358x3	358x4	
Gross weight (460V)	kg	361x2+396x2		353+396x3		361+396x3	396x4	
Operating temperature range	°C	Cooling: -5-48; Heating: -20-24						

Notes:
Capacities are based on the following conditions:
Cooling: Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB; Heating: Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB.
Piping length: Interconnecting piping length is 7.5m, level difference is zero.
Connection piping diameter of multi-unit is the main pipe connecting to the first indoor branch joint, in case of the total equivalent liquid length is less than 90m. If the total equivalent liquid length is more than 90m, please refer to technical manual to choose the connection piping diameter.
Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.

-  Indoor Units
VRF indoor units
-  Fresh Air Processing Unit
100% fresh air supply
-  Ventilation
Heat recovery ventilator (HRV)
-  AHU Connection Kit
Connect to other brand AHU
-  Control Systems
Smart control systems




VRF VC Pro Series Cooling Only

Optimized design for small to large buildings

- ▶ ALL DC inverter compressors
- ▶ ALL DC fan motors
- ▶ Capacity up to 90HP
- ▶ Connectable indoor units quantity up to 64
- ▶ ESP up to 60Pa
- ▶ Cycle duty operation
- ▶ Backup operation
- ▶ Precise oil control technology
- ▶ Advanced silence technology
- ▶ Simple communication wiring
- ▶ Auto addressing
- ▶ Easy maintenance


Energy Management System (EMS)

- Floating refrigerant temperature to balance comfort and efficiency
The evaporating temperature is automatically adjusted according to both indoor and outdoor temperature to maximize the comfort and energy efficiency.
- Output limitation during electricity supply restrictions
With the integration of EMS, for projects with temporary electricity supply restrictions, VC Pro VRF can be set to output 40-100% capacity.

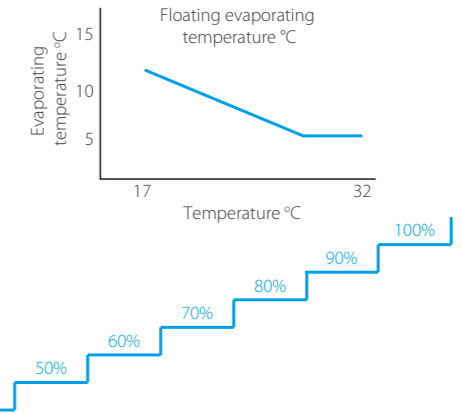

4-side heat exchanger


G-type heat exchangers have higher energy efficiency than the U-type.



2-rows G-type heat exchanger


High efficiency "2-1" refrigerant flow

The high efficiency "2-1" refrigerant flow increases the proportion of liquid refrigerant in heat exchanger and improve heat exchange efficiency.

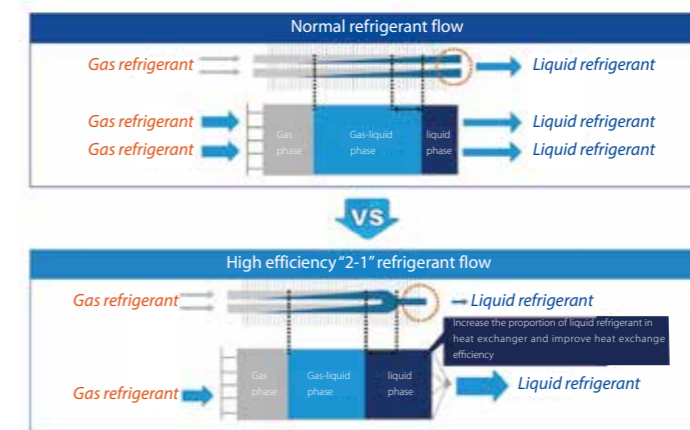


Wide Operation Range

The VC Pro VRF can operate stably in a wide ambient temperature range: from -5°C to 55°C in cooling mode.

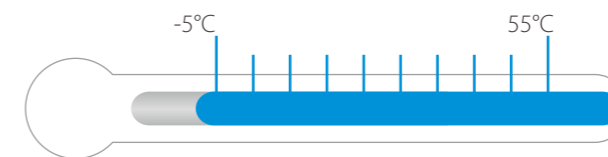

Long Piping Capability


- Total piping length: 1000m
- Longest piping length-actual (equivalent): 175m(200m)
- Longest piping length after first branch: 40/90*m
- Level difference between IDUs and ODU-ODU above (below): 90m (110m)
- Level difference between IDUs: 30m

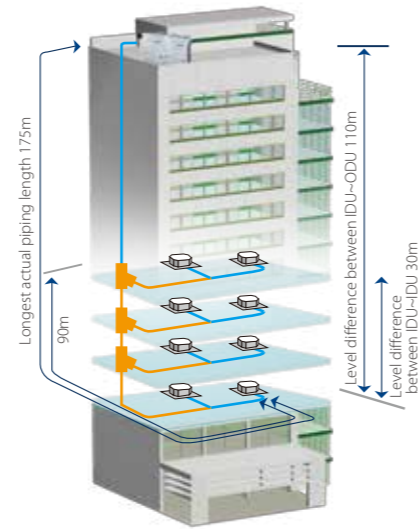

*The longest length after 1st branch is 40m as standard but can be extended up to 90m under certain conditions. Please contact your local Midea dealer for further information.


Real-time Refrigerant Amount Monitoring

The temperature and pressure of refrigerant can be real-time monitored by the outdoor unit. When the level of refrigerant is too low or too high, it can cause damage to the unit and poor performance. VC Pro outdoor unit can detect excessive or insufficient amounts of refrigerant to ensure consistent performance.

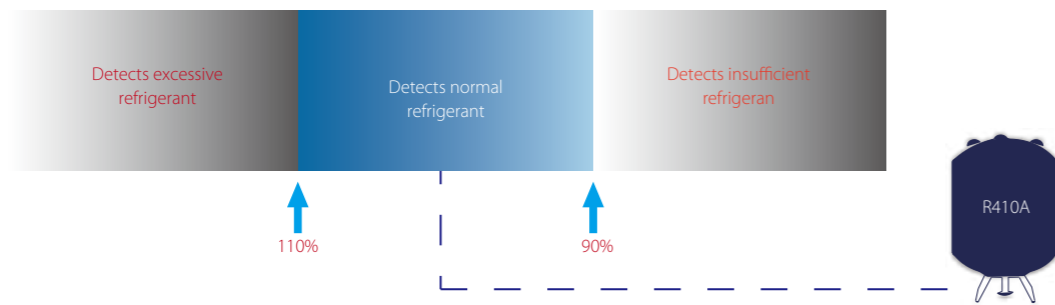

Refrigerant cooling PCB

The VC PRO VRF uses refrigerant cooling technology to cool the electric control box. It decreases the average temperature of electrical control components by about 8 degrees, guaranteeing the stable and safe running of the control system.

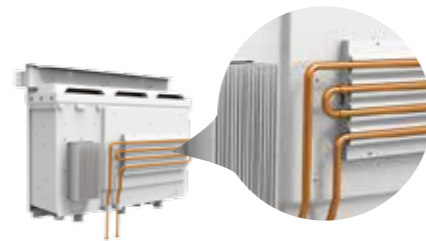

Intelligent Configurations


Intelligent configurations greatly simplify installation, commissioning and servicing.

- Field local configuration achieves quick and easy on-site settings, simplifies installation and commissioning.
- System checking and settings also can be easily achieved via wired controller making the configuration more flexible and convenient.
- A desktop or laptop PC can be used for browser-based access to achieve system configurations through IMMPRO gateway via LAN connection.



Oil Balance pipe not required

With the new oil management system, there is no need of oil balance pipe.

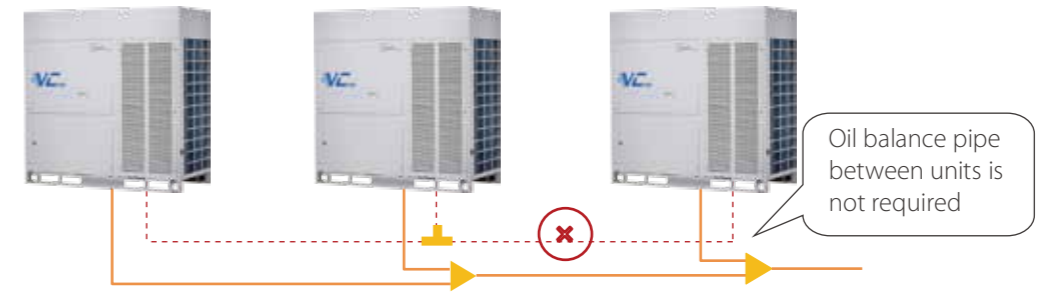

Automatic Refrigerant Charging

Automatic refrigerant charging makes installation and service easier and more efficient.

*This function is available as a customization option.



Dust-clean function*


The innovatively designed dust-clean function enables the outdoor unit to prevent the dust by itself.

*This function is available as a customization option.



Precise temperature control

VC Pro outdoor unit uses multiple and high precision EXVs to create comfortable indoor environment. The EXV control precision is up to 3000-stage which can precisely control refrigerant flow and guarantee stable indoor temperature. In this way, temperature setting can be adjusted in 0.5°C step, enabling precise comfort control.

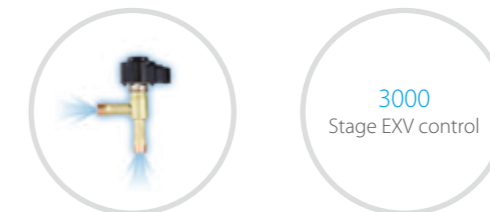

VRF VC Pro Series - Cooling Only

380~415V, 3N, 50(60)Hz



HP			8	10	12
Model name			MVC-224WV2GN1	MVC-280WV2GN1	MVC-335WV2GN1
Power supply			380-415/3/50(60)		
Cooling ¹	Capacity	kW	22.4	28.0	33.5
		kBtu/h	76.5	95.6	114.4
	Power input	kW	5.17	6.81	9.13
	EER		4.33	4.11	3.67
Connected indoor unit	Total capacity		50-130%		
	Maximum quantity		13	16	20
Compressor	Type		DC inverter		
	Quantity		1		
Fan	Type		DC		
	Model		ZKSN-560-8-42L		
	Quantity		1		
	Motor output	kW	0.56		
	Max. ESP	Pa	20 default;60 customization option		
	Airflow rate	m ³ /h	10400		10800
Refrigerant	Type		R410A		
	Factory charge	kg	8		
Pipe connections ²	Liquid pipe	mm	Φ12.7	Φ12.7	Φ15.9
	Gas pipe	mm	Φ25.4	Φ25.4	Φ28.6
Sound pressure level ³		dB(A)	58		
Net dimensions (WxHxD)		mm	960x1615x765		
Packed dimensions (WxHxD)		mm	1025x1790x830		
Net weight		kg	188		
Gross weight		kg	204		
Ambient temp.	Cooling	°C	-5 °C to 55 °C		



HP			14	16	18	20
Model name			MVC-400WV2GN1	MVC-450WV2GN1	MVC-500WV2GN1	MVC-560WV2GN1
Power supply			380-415/3/50(60)			
Cooling ¹	Capacity	kW	40.0	45.0	50.0	56.0
		kBtu/h	136.6	153.7	170.8	191.3
	Power input	kW	10.58	12.26	14.88	17.66
	EER		3.78	3.67	3.36	3.17
Connected indoor unit	Total capacity		50-130%			
	Maximum quantity		23	26	29	33
Compressor	Type		DC inverter			
	Quantity		1		2	
Fan	Type		DC			
	Model		ZKSN-750-8-2		ZKSN-560-8-42L	
	Quantity		1		2	
	Motor output	kW	0.75		0.56x2	
	Max. ESP	Pa	20 default;60 customization option			
	Airflow rate	m ³ /h	11600		12000	12200
Refrigerant	Type		R410A		R410A	
	Factory charge	kg	11		13	
Pipe connections ²	Liquid pipe	mm	Φ15.9		Φ19.1	
	Gas pipe	mm	Φ31.8		Φ31.8	
Sound pressure level ³		dB(A)	60		63	
Net dimensions (WxHxD)		mm	960x1615x765		1250x1615x765	
Packed dimensions (WxHxD)		mm	1025x1790x830		1305x1790x820	
Net weight		kg	197		278	
Gross weight		kg	213		297	
Ambient temp.	Cooling	°C	-5 °C to 55 °C			

Notes:

- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Diameters given are those of the unit's accessories.
- Sound pressure level is measured at a position 1m in front of the unit and 1.3m above the floor in a semi-anechoic chamber.

VRF VC Pro Series - Cooling Only

380~415V, 3N, 50(60)Hz



HP			22	24	26
Model name			MVC-615WV2GN1	MVC-670WV2GN1	MVC-730WV2GN1
Power supply			380-415/3/50(60)		
Cooling ¹	Capacity	kW	61.5	67.0	73.0
		kBtu/h	210.0	228.8	249.3
	Power input	kW	20.23	20.68	23.40
	EER		3.04	3.24	3.12
Connected indoor unit	Total capacity		50-130%		
	Maximum quantity		36	39	43
Compressor	Type		DC inverter		
	Quantity		2		
Fan	Type		DC		
	Model		ZKSN-560-8-42L		
	Quantity		2		
	Motor output	kW	0.56x2		
	Max. ESP	Pa	20 default;60 customization option		
	Airflow rate	m ³ /h	12200		19600
Refrigerant	Type		R410A		
	Factory charge	kg	13		19
Pipe connections ²	Liquid pipe	mm	Φ19.1		Φ22.2
	Gas pipe	mm	Φ31.8		
Sound pressure level ³		dB(A)	63		64
Net dimensions (WxHxD)		mm	1250x1615x765		1585x1615x765
Packed dimensions (WxHxD)		mm	1305x1790x820		1650x1810x840
Net weight		kg	278		338
Gross weight		kg	297		362
Ambient temp.	Cooling	°C	-5 °C to 55 °C		



HP			28	30
Model name			MVC-785WV2GN1	MVC-850WV2GN1
Power supply			380-415/3/50(60)	
Cooling ¹	Capacity	kW	78.5	85.0
		kBtu/h	268.1	290.3
	Power input	kW	26.08	29.51
	EER		3.01	2.88
Connected indoor unit	Total capacity		50-130%	
	Maximum quantity		46	
Compressor	Type		DC inverter	
	Quantity		2	
Fan	Type		DC	
	Model		ZKSN-560-8-42L	
	Quantity		2	
	Motor output	kW	0.56x2	
	Max. ESP	Pa	20 default;60 customization option	
	Airflow rate	m ³ /h	20600	
Refrigerant	Type		R410A	
	Factory charge	kg	19	
Pipe connections ²	Liquid pipe	mm	Φ22.2	
	Gas pipe	mm	Φ31.8	Φ38.1
Sound pressure level ³		dB(A)	64	
Net dimensions (WxHxD)		mm	1585x1615x765	
Packed dimensions (WxHxD)		mm	1650x1810x840	
Net weight		kg	338	
Gross weight		kg	362	
Ambient temp.	Cooling	°C	-5 °C to 55 °C	

Notes:

- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Diameters given are those of the unit's accessories.
- Sound pressure level is measured at a position 1m in front of the unit and 1.3m above the floor in a semi-anechoic chamber.

VRF VC Pro Series - Cooling Only

380~415V, 3N, 50(60)Hz



HP		32	34	36	38	
Model name		MVC-900WV2GN1	MVC-950WV2GN1	MVC-1010WV2GN1	MVC-1065WV2GN1	
Combination type		16HP+16HP	22HP+12HP	20HP+16HP	22HP+16HP	
Power supply		V/N/Hz 380-415/3/50(60)				
Cooling ¹	Capacity	kW	90.0	95.0	101.0	106.5
		kBtu/h	307.4	324.4	345.0	363.7
	Power input	kW	24.52	29.36	29.92	32.49
	EER		3.67	3.24	3.38	3.28
Connected indoor unit	Total capacity	50-130%				
	Maximum quantity	53	56	59	63	
Compressor	Type	DC inverter				
	Quantity	2		3		
Fan	Type	DC				
	Quantity	2		3		
	Max. ESP	Pa	20 default;60 customization option			
Refrigerant	Type	R410A				
	Factory charge	kg	11x2	13+8	13+11	
Pipe connections ²	Liquid pipe	mm	19.1	19.1	19.1	
	Gas pipe	mm	31.8	31.8	38.1	
Sound pressure level ³		dB(A)	64		65	
Net dimensions (WxHxD)	mm	(960x1615x765)x2		(1250x1615x765)+(960x1615x765)		
Packed dimensions (WxHxD)	mm	(1025x1790x830)x2		(1305x1790x820)+(1025x1790x830)		
Net weight	kg	188x2		278+188		
Gross weight	kg	204x2		297+204		
Ambient temp.	Cooling	°C	-5°C to 55 °C			



HP		40	42	44	
Model name		MVC-1120WV2GN1	MVC-1180WV2GN1	MVC-1235WV2GN1	
Combination type		24HP+16HP	26HP+16HP	28HP+16HP	
Power supply		V/N/Hz 380-415/3/50(60)			
Cooling ¹	Capacity	kW	112.0	118.0	123.5
		kBtu/h	382.5	403.0	421.8
	Power input	kW	32.94	35.66	38.34
	EER		3.40	3.31	3.22
Connected indoor unit	Total capacity	50-130%			
	Maximum quantity	64			
Compressor	Type	DC inverter			
	Quantity	3			
Fan	Type	DC			
	Quantity	3			
	Max. ESP	Pa	20 default;60 customization option		
Refrigerant	Type	R410A			
	Factory charge	kg	19+11		
Pipe connections ²	Liquid pipe	mm	19.1		
	Gas pipe	mm	38.1		
Sound pressure level ³		dB(A)	65	66	
Net dimensions (WxHxD)	mm	(1585x1615x765)+(960x1615x765)			
Packed dimensions (WxHxD)	mm	(1650x1810x840)+(1025x1790x830)			
Net weight	kg	338+188			
Gross weight	kg	362+204			
Ambient temp.	Cooling	°C	-5°C to 55 °C		

Notes:

- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Diameters given are those for the pipe connecting the outdoor unit combination to the first indoor branch joint for systems with total equivalent liquid piping lengths of less than 90m. For systems with total equivalent liquid piping lengths of 90m or longer, please refer to the VC Pro Series Engineering Data Book for connection piping diameters.
- Sound pressure level is measured at a position 1m in front of the unit and 1.3m above the floor in a semi-anechoic chamber.

VRF VC Pro Series - Cooling Only

380~415V, 3N, 50(60)Hz



HP		46	48	50	52	
Model name		MVC-1300WV2GN1	MVC-1345WV2GN1	MVC-1400WV2GN1	MVC-1465WV2GN1	
Combination type		30HP+16HP	26HP+22HP	28HP+22HP	30HP+22HP	
Power supply		V/N/Hz 380-415/3/50(60)				
Cooling ¹	Capacity	kW	130.0	134.5	140.0	146.5
		kBtu/h	444.0	459.3	478.1	500.3
	Power input	kW	41.77	43.63	46.31	49.74
	EER		3.11	3.08	3.02	2.95
Connected indoor unit	Total capacity	50-130%				
	Maximum quantity	64				
Compressor	Type	DC inverter				
	Quantity	3		4		
Fan	Type	DC				
	Quantity	3		4		
	Max. ESP	Pa	20 default;60 customization option			
Refrigerant	Type	R410A				
	Factory charge	kg	19+11		19+13	
Pipe connections ²	Liquid pipe	mm		19.1		
	Gas pipe	mm		38.1		
Sound pressure level ³		dB(A)		66		
Net dimensions (WxHxD)	mm	(1585x1615x765)+(960x1615x765)		(1585x1615x765)+(1250x1615x765)		
Packed dimensions (WxHxD)	mm	(1650x1810x840)+(1025x1790x830)		(1650x1810x840)+(1305x1790x820)		
Net weight	kg	338+188				
Gross weight	kg	362+204				
Ambient temp.	Cooling	°C	-5°C to 55 °C			



HP		54	56	58	
Model name		MVC-1515WV2GN1	MVC-1570WV2GN1	MVC-1635WV2GN1	
Combination type		28HP+26HP	28HP+28HP	30HP+28HP	
Power supply		V/N/Hz 380-415/3/50(60)			
Cooling ¹	Capacity	kW	151.5	157.0	163.5
		kBtu/h	517.4	536.2	558.4
	Power input	kW	49.48	52.16	55.59
	EER		3.06	3.01	2.94
Connected indoor unit	Total capacity	50-130%			
	Maximum quantity	64			
Compressor	Type	DC inverter			
	Quantity	4			
Fan	Type	DC			
	Quantity	4			
	Max. ESP	Pa	20 default;60 customization option		
Refrigerant	Type	R410A			
	Factory charge	kg	19x2		
Pipe connections ²	Liquid pipe	mm	19.1		
	Gas pipe	mm	38.1	41.2	
Sound pressure level ³		dB(A)	66	66	
Net dimensions (WxHxD)	mm	(1585x1615x765)x2			
Packed dimensions (WxHxD)	mm	(1650x1810x840)x2			
Net weight	kg	338x2			
Gross weight	kg	362x2			
Ambient temp.	Cooling	°C	-5°C to 55 °C		

Notes:

- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Diameters given are those for the pipe connecting the outdoor unit combination to the first indoor branch joint for systems with total equivalent liquid piping lengths of less than 90m. For systems with total equivalent liquid piping lengths of 90m or longer, please refer to the VC Pro Series Engineering Data Book for connection piping diameters.
- Sound pressure level is measured at a position 1m in front of the unit and 1.3m above the floor in a semi-anechoic chamber.

VRF VC Pro Series - Cooling Only

380~415V, 3N, 50(60)Hz



HP	60		62		64		66		
Model name	MVC-1700WV2GN1		MVC-1750WV2GN1		MVC-1795WV2GN1		MVC-1850WV2GN1		
Combination type	30HP+30HP		30HP+16HP+16HP		26HP+22HP+16HP		28HP+22HP+16HP		
Power supply	V/N/Hz		380-415/3/50(60)						
Cooling ¹	Capacity	kW	170.0	175.0	179.5	185.0			
		kBtu/h	580.6	597.8	613.0	631.8			
	Power input	kW	59.02	54.03	55.89	58.57			
	EER		2.88	3.24	3.21	3.16			
Connected indoor unit	Total capacity	50-130%							
	Maximum quantity	64							
Compressor	Type	DC inverter							
	Quantity	4				5			
Fan	Type	DC							
	Quantity	4				5			
	Max. ESP	Pa	20 default;60 customization option						
Refrigerant	Type	R410A							
	Factory charge	kg	19x2	19+11x2	19+13+11				
Pipe connections ²	Liquid pipe	mm	19.1						
	Gas pipe	mm	41.2						
Sound pressure level ³	dB(A)	66							
Net dimensions (WxHxD)	mm	(1585x1615x765)x2	(1585x1615x765)+(960x1615x765)x2	(1585x1615x765)+(1250x1615x765)+(960x1615x765)					
Packed dimensions (WxHxD)	mm	(1650x1810x840)x2	(1650x1810x840)+(1025x1790x830)x2	(1650x1810x840)+(1305x1790x820)+(1025x1790x830)					
Net weight	kg	338x2	338+188x2	338+278+197					
Gross weight	kg	362x2	362+204x2	362+297+213					
Ambient temp	Cooling	°C	-5°C to 55 °C						



HP	68		70		72		74		
Model name	MVC-1915WV2GN1		MVC-1965WV2GN1		MVC-2020WV2GN1		MVC-2085WV2GN1		
Combination type	30HP+22HP+16HP		28HP+26HP+16HP		28HP+28HP+16HP		30HP+28HP+16HP		
Power supply	V/N/Hz		380-415/3/50(60)						
Cooling ¹	Capacity	kW	191.5	196.5	202.0	208.5			
		kBtu/h	654.1	671.1	689.9	712.2			
	Power input	kW	62.00	61.74	64.42	67.85			
	EER		3.09	3.18	3.14	3.07			
Connected indoor unit	Total capacity	50-130%							
	Maximum quantity	64							
Compressor	Type	DC inverter							
	Quantity	5							
Fan	Type	DC							
	Quantity	5							
	Max. ESP	Pa	20 default;60 customization option						
Refrigerant	Type	R410A							
	Factory charge	kg	19+13+11	19x2+11					
Pipe connections ²	Liquid pipe	mm	22.2						
	Gas pipe	mm	44.5						
Sound pressure level ³	dB(A)	67				68			
Net dimensions (WxHxD)	mm	(1585x1615x765)+(1250x1615x765)+(960x1615x765)	(1585x1615x765)x2+(960x1615x765)						
Packed dimensions (WxHxD)	mm	(1650x1810x840)+(1305x1790x820)+(1025x1790x830)	(1650x1810x840)x2+(1025x1790x830)						
Net weight	kg	338+278+197	338x2+188						
Gross weight	kg	362+297+213	362x2+204						
Ambient temp	Cooling	°C	-5°C to 55 °C						

Notes:

- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Diameters given are those for the pipe connecting the outdoor unit combination to the first indoor branch joint for systems with total equivalent liquid piping lengths of less than 90m. For systems with total equivalent liquid piping lengths of 90m or longer, please refer to the VC Pro Series Engineering Data Book for connection piping diameters.
- Sound pressure level is measured at a position 1m in front of the unit and 1.3m above the floor in a semi-anechoic chamber.

VRF VC Pro Series - Cooling Only

380~415V, 3N, 50(60)Hz



HP	76		78		80		82		
Model name	MVC-2150WV2GN1		MVC-2185WV2GN1		MVC-2250WV2GN1		MVC-2315WV2GN1		
Combination type	30HP+30HP+16HP		28HP+28HP+22HP		30HP+28HP+22HP		30HP+30HP+22HP		
Power supply	V/N/Hz		380-415/3/50(60)						
Cooling ¹	Capacity	kW	215.0	218.5	225.0	231.5			
		kBtu/h	734.4	746.2	768.4	790.6			
	Power input	kW	71.28	72.39	75.82	79.25			
	EER		3.02	3.02	2.97	2.92			
Connected indoor unit	Total capacity	50-130%							
	Maximum quantity	64							
Compressor	Type	DC inverter							
	Quantity	5				6			
Fan	Type	DC							
	Quantity	5				6			
	Max. ESP	Pa	20 default;60 customization option						
Refrigerant	Type	R410A							
	Factory charge	kg	19x2+11	19x2+13					
Pipe connections ²	Liquid pipe	mm	22.2						
	Gas pipe	mm	44.5						
Sound pressure level ³	dB(A)	68							
Net dimensions (WxHxD)	mm	(1585x1615x765)x2+(960x1615x765)	(1585x1615x765)x2+(1250x1615x765)						
Packed dimensions (WxHxD)	mm	(1650x1810x840)x2+(1025x1790x830)	(1650x1810x840)x2+(1305x1790x820)						
Net weight	kg	338x2+188	338x2+188						
Gross weight	kg	362x2+204	362x2+204						
Ambient temp	Cooling	°C	-5°C to 55 °C						



HP	84		86		88		90		
Model name	MVC-2355WV2GN1		MVC-2420WV2GN1		MVC-2485WV2GN1		MVC-2550WV2GN1		
Combination type	28HP+28HP+28HP		30HP+28HP+28HP		30HP+30HP+28HP		30HP+30HP+30HP		
Power supply	V/N/Hz		380-415/3/50(60)						
Cooling ¹	Capacity	kW	235.5	242.0	248.5	255.0			
		kBtu/h	804.3	826.5	848.7	870.9			
	Power input	kW	78.24	81.67	85.10	88.53			
	EER		3.01	2.96	2.92	2.88			
Connected indoor unit	Total capacity	50-130%							
	Maximum quantity	64							
Compressor	Type	DC inverter							
	Quantity	6							
Fan	Type	DC							
	Quantity	6							
	Max. ESP	Pa	20 default;60 customization option						
Refrigerant	Type	R410A							
	Factory charge	kg	19x3						
Pipe connections ²	Liquid pipe	mm	25.4						
	Gas pipe	mm	50.8						
Sound pressure level ³	dB(A)	68							
Net dimensions (WxHxD)	mm	(1585x1615x765)x3							
Packed dimensions (WxHxD)	mm	(1650x1810x840)x3							
Net weight	kg	338x3							
Gross weight	kg	362x3							
Ambient temp	Cooling	°C	-5°C to 55 °C						

Notes:

- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Diameters given are those for the pipe connecting the outdoor unit combination to the first indoor branch joint for systems with total equivalent liquid piping lengths of less than 90m. For systems with total equivalent liquid piping lengths of 90m or longer, please refer to the VC Pro Series Engineering Data Book for connection piping diameters.
- Sound pressure level is measured at a position 1m in front of the unit and 1.3m above the floor in a semi-anechoic chamber.

VRF VC Pro Series - Cooling Only

220V, 3Ph, 50(60)Hz



HP			8	10	12
Model name			MVC-224WV2WN1	MVC-280WV2WN1	MVC-335WV2WN1
Power supply			220/3/50(60)		
Cooling ¹	Capacity	V/Ph/Hz			
		kW	22.4	28.0	33.5
	Power input	kBtu/h	76.5	95.6	114.4
		kW	5.25	7.10	8.90
EER			3.94	3.76	
Connected indoor unit	Total capacity		50-130%		
	Maximum quantity		13	16	20
Compressor	Type		DC inverter		
	Quantity		1		
Fan	Type		DC		
	Quantity		1		
	Motor output		kW		
	Static pressure		Pa(in.wg)		
	Airflow rate		m ³ /h(CFM)		
Refrigerant	Drive type		Direct		
	Type		R410A		
Pipe connections ²	Factory charge		kg(lbs)		
	Liquid pipe		mm(inch)		
Gas pipe		mm(inch)			
Sound pressure level ³		dB(A)		57	58
Net dimensions (WxHxD)		mm		960x1615x765	
		inch		37-13/16x63-9/16x30-1/8	
Packed dimensions (WxHxD)		mm		1025x1790x830	
		inch		40-3/8x70-1/2x32-11/16	
Net weight		kg		193	
		lbs		425	
Gross weight		kg		209	
		lbs		461	
Ambient temp.		Cooling		°C (°F)	
				-5~55 (23~131)	



HP			14	16	18	20
Model name			MVC-400WV2WN1	MVC-450WV2WN1	MVC-500WV2WN1	MVC-560WV2WN1
Power supply			220/3/50(60)			
Cooling ¹	Capacity	V/Ph/Hz				
		kW	40.0	45.0	50.0	56.0
	Power input	kBtu/h	136.6	153.7	170.8	191.3
		kW	10.30	12.00	13.70	16.50
EER			3.88	3.75	3.65	3.39
Connected indoor unit	Total capacity		50-130%			
	Maximum quantity		23	26	29	33
Compressor	Type		DC inverter			
	Quantity		1			
Fan	Type		DC			
	Quantity		1			
	Motor output		kW			
	Static pressure		Pa(in.wg)			
	Airflow rate		m ³ /h(CFM)			
Refrigerant	Drive type		Direct			
	Type		R410A			
Pipe connections ²	Factory charge		kg(lbs)			
	Liquid pipe		mm(inch)			
Gas pipe		mm(inch)				
Sound pressure level ³		dB(A)		60	61	62
Net dimensions (WxHxD)		mm		960x1615x765		1250x1615x765
		inch		37-13/16x63-9/16x30-1/8		49-1/4x63-9/16x30-1/8
Packed dimensions (WxHxD)		mm		1025x1790x830		1305x1790x820
		inch		40-3/8x70-1/2x32-11/16		51-3/8x70-1/2x32-1/4
Net weight		kg		200		296
		lbs		441		653
Gross weight		kg		216		313
		lbs		476		690
Ambient temp.		Cooling		°C (°F)		-5~55 (23~131)

Notes:

- Indoor temperature 27°C(80.6°F) DB, 19°C(66.2°F) WB; outdoor temperature 35°C(95°F) DB; equivalent refrigerant piping length 7.5m(24.6ft.) with zero level difference.
- Diameters given are those of the unit's accessories.
- Sound pressure level is measured at a position 1m(3.28ft.) in front of the unit and 1.3m(4.26ft.) above the floor in a semi-anechoic chamber.

VRF VC Pro Series - Cooling Only

220V, 3Ph, 50(60)Hz



HP			22	24	26
Model name			MVC-615WV2WN1	MVC-670WV2WN1	MVC-730WV2WN1
Power supply			220/3/50(60)		
Cooling ¹	Capacity	V/Ph/Hz			
		kW	61.5	67.0	73.0
	Power input	kBtu/h	210.0	228.8	249.3
		kW	19.65	20.10	22.20
EER			3.13	3.33	3.29
Connected indoor unit	Total capacity		50-130%		
	Maximum quantity		36	39	43
Compressor	Type		DC inverter		
	Quantity		2		
Fan	Type		DC		
	Quantity		2		
	Motor output		kW		
	Static pressure		Pa(in.wg)		
	Airflow rate		m ³ /h(CFM)		
Refrigerant	Drive type		Direct		
	Type		R410A		
Pipe connections ²	Factory charge		kg(lbs)		
	Liquid pipe		mm(inch)		
Gas pipe		mm(inch)			
Sound pressure level ³		dB(A)		63	64
Net dimensions (WxHxD)		mm		1250x1615x765	
		inch		49-1/4x63-9/16x30-1/8	
Packed dimensions (WxHxD)		mm		1585x1615x765	
		inch		62-3/8x63-9/16x30-1/8	
Net weight		kg		296	
		lbs		653	
Gross weight		kg		313	
		lbs		690	
Ambient temp.		Cooling		°C (°F)	
				-5~55 (23~131)	



HP			28	30
Model name			MVC-785WV2WN1	MVC-850WV2WN1
Power supply			220/3/50(60)	
Cooling ¹	Capacity	V/Ph/Hz		
		kW	78.5	85.0
	Power input	kBtu/h	268.1	290.3
		kW	24.18	27.51
EER			3.25	3.09
Connected indoor unit	Total capacity		50-130%	
	Maximum quantity		46	50
Compressor	Type		DC inverter	
	Quantity		2	
Fan	Type		DC	
	Quantity		2	
	Motor output		kW	
	Static pressure		Pa(in.wg)	
	Airflow rate		m ³ /h(CFM)	
Refrigerant	Drive type		Direct	
	Type		R410A	
Pipe connections ²	Factory charge		kg(lbs)	
	Liquid pipe		mm(inch)	
Gas pipe		mm(inch)		
Sound pressure level ³		dB(A)		64
Net dimensions (WxHxD)		mm		1585x1615x765
		inch		62-3/8x63-9/16x30-1/8
Packed dimensions (WxHxD)		mm		1650x1810x840
		inch		64-15/160x71-1/4x33-1/16
Net weight		kg		352
		lbs		776
Gross weight		kg		376
		lbs		829
Ambient temp.		Cooling		°C (°F)
				-5~55 (23~131)

Notes:

- Indoor temperature 27°C(80.6°F) DB, 19°C(66.2°F) WB; outdoor temperature 35°C(95°F) DB; equivalent refrigerant piping length 7.5m(24.6ft.) with zero level difference.
- Diameters given are those of the unit's accessories.
- Sound pressure level is measured at a position 1m(3.28ft.) in front of the unit and 1.3m(4.26ft.) above the floor in a semi-anechoic chamber.

VRF VC Pro Series - Cooling Only

220V, 3Ph, 50(60)Hz



HP		32		34		36		38	
Model name		MVC-900WV2WN1		MVC-950WV2WN1		MVC-1010WV2WN1		MVC-1065WV2WN1	
Combination type		16HP+16HP		22HP+12HP		20HP+16HP		22HP+16HP	
Power supply		V/Ph/Hz		220/3/50(60)					
Cooling ¹	Capacity	kW		90.0		95.0		101.0	
		kBTu/h		307.4		324.4		345.0	
	Power input	kW		24.00		28.55		28.50	
	EER			3.75		3.33		3.54	
Connected indoor unit	Total capacity			50-130%					
	Maximum quantity			53		56		59	
Compressor	Type			DC inverter					
	Quantity			2		3			
	Oil type			FV 50s					
	Start-up method			Soft start					
Fan	Type			DC					
	Quantity			2		3			
	Motor output	kW		0.75x2		0.56x3		0.56x2+0.75	
	Static pressure	Pa(in.wg)		20(0.08) default; 60(0.24) customization option					
	Airflow rate	m ³ /h		23200		23000		23800	
		CFM		13655		13537		14008	
Refrigerant	Drive type			Direct					
	Type			R410A					
Factory charge	kg	11x2		13+8		13+11			
	lbs	24x2		28.7+17.6		28.7+24.3			
Pipe connections ²	Liquid pipe	mm(inch)		Φ19.1(3/4)		Φ19.1(3/4)		Φ19.1(3/4)	
	Gas pipe	mm(inch)		Φ31.8(1-1/4)		Φ31.8(1-1/4)		Φ38.1(1-1/2)	
Sound pressure level ³	dB(A)		64		65		65		
Net dimensions (WxHxD)	mm	(960x1615x765)x2		(1250x1615x765)+(960x1615x765)					
	inch	(37-13/16x63-9/16x30-1/8)x2		(49-7/32x63-9/16x30-1/8)+(37-13/16x63-9/16x30-1/8)					
Packed dimensions (WxHxD)	mm	(1025x1790x830)x2		(1305x1790x820)+(1025x1790x830)					
	inch	(40-3/8x70-1/2x32-11/16)x2		(51-3/8x70-1/2x32-1/4)+(40-3/8x70-1/2x32-11/16)					
Net weight	kg	193x2		296+193		296+193			
	lbs	425x2		653+425		653+425			
Gross weight	kg	209x2		313+209		313+209			
	lbs	461x2		690+461		690+461			
Ambient temp.	Cooling	°C (°F)		-5~55 (23~131)					



HP		40		42		44	
Model name		MVC-1120WV2WN1		MVC-1180WV2WN1		MVC-1235WV2WN1	
Combination type		24HP+16HP		26HP+16HP		28HP+16HP	
Power supply		V/Ph/Hz		220/3/50(60)			
Cooling ¹	Capacity	kW		112.0		118.0	
		kBTu/h		382.5		403.0	
	Power input	kW		32.10		34.20	
	EER			3.49		3.45	
Connected indoor unit	Total capacity			50-130%			
	Maximum quantity			64		66	
Compressor	Type			DC inverter			
	Quantity			3		3	
	Oil type			FV 50s			
	Start-up method			Soft start			
Fan	Type			DC			
	Quantity			3		3	
	Motor output	kW		0.56x2+0.75			
	Static pressure	Pa(in.wg)		20(0.08) default; 60(0.24) customization option			
	Airflow rate	m ³ /h		31200		32200	
		CFM		18364		18952	
Refrigerant	Drive type			Direct			
	Type			R410A			
Factory charge	kg	19+11		19+11		19+11	
	lbs	41.9+24.3		41.9+24.3		41.9+24.3	
Pipe connections ²	Liquid pipe	mm(inch)		Φ19.1(3/4)		Φ19.1(3/4)	
	Gas pipe	mm(inch)		Φ38.1(1-1/2)		Φ38.1(1-1/2)	
Sound pressure level ³	dB(A)		65		66		
Net dimensions (WxHxD)	mm	(1585x1615x765)+(960x1615x765)		(1585x1615x765)+(960x1615x765)			
	inch	(62-3/8x63-9/16x30-1/8)+(37-13/16x63-9/16x30-1/8)		(62-3/8x63-9/16x30-1/8)+(37-13/16x63-9/16x30-1/8)			
Packed dimensions (WxHxD)	mm	(1650x1810x840)+(1025x1790x830)		(1650x1810x840)+(1025x1790x830)			
	inch	(64-15/160x71-1/4x33-1/16)+(40-3/8x70-1/2x32-11/16)		(64-15/160x71-1/4x33-1/16)+(40-3/8x70-1/2x32-11/16)			
Net weight	kg	352+193		352+193		352+193	
	lbs	776+425		776+425		776+425	
Gross weight	kg	376+209		376+209		376+209	
	lbs	829+461		829+461		829+461	
Ambient temp.	Cooling	°C (°F)		-5~55 (23~131)			

Notes:

- Indoor temperature 27°C(80.6°F) DB, 19°C(66.2°F) WB; outdoor temperature 35°C(95°F) DB; equivalent refrigerant piping length 7.5m(24.6ft.) with zero level difference.
- Diameters given are those for the pipe connecting the outdoor unit combination to the first indoor branch joint for systems with total equivalent liquid piping lengths of less than 90m(295.2ft.). For systems with total equivalent liquid piping lengths of 90m(295.2ft.) or longer, please refer to the VC Pro Series Engineering Data Book for connection piping diameters.
- Sound pressure level is measured at a position 1m(3.28ft.) in front of the unit and 1.3m(4.26ft.) above the floor in a semi-anechoic chamber.

VRF VC Pro Series - Cooling Only

220V, 3Ph, 50(60)Hz



HP		46		48		50		52	
Model name		MVC-1300WV2WN1		MVC-1345WV2WN1		MVC-1400WV2WN1		MVC-1465WV2WN1	
Combination type		30HP+16HP		26HP+22HP		28HP+22HP		30HP+22HP	
Power supply		V/Ph/Hz		220/3/50(60)					
Cooling ¹	Capacity	kW		130.0		134.5		140.0	
		kBTu/h		444.0		459.3		478.1	
	Power input	kW		39.51		41.85		43.83	
	EER			3.29		3.21		3.19	
Connected indoor unit	Total capacity			50-130%					
	Maximum quantity			64		64		64	
Compressor	Type			DC inverter					
	Quantity			3		4		4	
	Oil type			FV 50s					
	Start-up method			3		4			
Fan	Type			DC					
	Quantity			3		4		4	
	Motor output	kW		0.56x2+0.75		0.56x4			
	Static pressure	Pa(in.wg)		20(0.08) default; 60(0.24) customization option		20(0.08) default; 60(0.24) customization option			
	Airflow rate	m ³ /h		32200		31800		32800	
		CFM		18952		18717		19305	
Refrigerant	Drive type			Direct					
	Type			R410A					
Factory charge	kg	19+11		19+11		19+13		19+13	
	lbs	41.9+24.3		41.9+24.3		41.9+28.7		41.9+28.7	
Pipe connections ²	Liquid pipe	mm(inch)		Φ19.1(3/4)		Φ19.1(3/4)		Φ19.1(3/4)	
	Gas pipe	mm(inch)		Φ38.1(1-1/2)		Φ38.1(1-1/2)		Φ38.1(1-1/2)	
Sound pressure level ³	dB(A)		66		66		66		
Net dimensions (WxHxD)	mm	(1585x1615x765)+(960x1615x765)		(1585x1615x765)+(960x1615x765)		(1585x1615x765)+(1250x1615x765)			
	inch	(62-3/8x63-9/16x30-1/8)+(37-13/16x63-9/16x30-1/8)		(62-3/8x63-9/16x30-1/8)+(37-13/16x63-9/16x30-1/8)		(62-3/8x63-9/16x30-1/8)+(49-1/4x63-9/16x30-1/8)			
Packed dimensions (WxHxD)	mm	(1650x1810x840)+(1025x1790x830)		(1650x1810x840)+(1025x1790x830)		(1650x1810x840)+(1305x1790x820)			
	inch	(64-15/160x71-1/4x33-1/16)+(40-3/8x70-1/2x32-11/16)		(64-15/160x71-1/4x33-1/16)+(40-3/8x70-1/2x32-11/16)		(64-15/160x71-1/4x33-1/16)+(51-3/8x70-1/2x32-1/4)			
Net weight	kg	352+193		352+193		352+193		352+193	
	lbs	776+425		776+425		776+425		776+425	
Gross weight	kg	376+209		376+209		376+209		376+209	
	lbs	829+461		829+461		829+461		829+461	
Ambient temp.	Cooling	°C (°F)		-5~55 (23~131)					



HP		54		56		58	
Model name		MVC-1515WV2WN1		MVC-1570WV2WN1		MVC-1635WV2WN1	
Combination type		28HP+26HP		28HP+28HP		30HP+28HP	
Power supply		V/Ph/Hz		220/3/50(60)			
Cooling ¹	Capacity	kW		151.5		157.0	
		kBTu/h		517.4		536.2	
	Power input	kW		46.38		48.36	
	EER			3.27		3.25	
Connected indoor unit	Total capacity			50-130%			
	Maximum quantity			64		64	
Compressor	Type			DC inverter			
	Quantity			4		4	
	Oil type			FV 50s			
	Start-up method			4		4	
Fan	Type			DC			
	Quantity			4		4	
	Motor output	kW		0.56x4		0.56x4	
	Static pressure	Pa(in.wg)		20(0.08) default; 60(0.24) customization option		20(0.08) default; 60(0.24) customization option	
	Airflow rate	m ³ /h		40200		41200	
		CFM		23661		24250	
Refrigerant	Drive type			Direct			
	Type			R410A			
Factory charge	kg	19x2		19x2		19x2	
	lbs	41.9x2		41.9x2		41.9x2	
Pipe connections ²	Liquid pipe	mm(inch)		Φ19.1(3/4)		Φ19.1(3/4)	
	Gas pipe	mm(inch)		Φ38.1(1-1/2)		Φ41.2(1-5/8)	
Sound pressure level ³	dB(A)		66		66		
Net dimensions (WxHxD)	mm	(1585x1615x765)x2		(1585x1615x765)x2		(1585x1615x765)x2	
	inch	(62-3/8x63-9/16x30-1/8)x2		(62-3/8x63-9/16x30-1/8)x2		(62-3/8x63-9/16x30-1/8)x2	
Packed dimensions (WxHxD)	mm	(1650x1810x840)x2		(1650x1810x840)x2		(1650x1810x840)x2	
	inch	(64-15/160x71-1/4x33-1/16)x2		(64-15/160x71-1/4x33-1/16)x2		(64-15/160x71-1/4x33-1/16)x2	
Net weight	kg	352x2		352x2		352x2	
	lbs	776x2		776x2		776x2	
Gross weight	kg	376x2		376x2		376x2	
	lbs	829x2		829x2		829x2	
Ambient temp.	Cooling	°C (°F)		-5~55 (23~131)			

Notes:

- Indoor temperature 27°C(80.6°F) DB, 19°C(66.2°F) WB; outdoor temperature 35°C(95°F) DB; equivalent refrigerant piping length 7.5m(24.6ft.) with zero level difference.
- Diameters given are those for the pipe connecting the outdoor unit combination to the first indoor branch joint for systems with total equivalent liquid piping lengths of less than 90m(295.2ft.). For systems with total equivalent liquid piping lengths of 90m(295.2ft.) or longer, please refer to the VC Pro Series Engineering Data Book for connection piping diameters.
- Sound pressure level is measured at a position 1m(3.28ft.) in front of the unit and 1.3m(4.26ft.) above the floor in a semi-anechoic chamber.

VRF VC Pro Series - Cooling Only

220V, 3Ph, 50(60)Hz



HP	60		62		64		66	
Model name	MVC-1700WV2WN1		MVC-1750WV2WN1		MVC-1795WV2WN1		MVC-1850WV2WN1	
Combination type	30HP+30HP		30HP+16HP+16HP		26HP+22HP+16HP		28HP+22HP+16HP	
Power supply	V/Ph/Hz		220/3/50(60)		220/3/50(60)		220/3/50(60)	
Cooling ¹	Capacity	kW	170.0	175.0	179.5	185.0		
		kBtu/h	580.6	597.8	613.0	631.8		
	Power input	kW	55.02	51.51	53.85	55.83		
	EER		3.09	3.40	3.33	3.31		
Connected indoor unit	Total capacity		50-130%					
	Maximum quantity		64					
Compressor	Type		DC inverter					
	Quantity		4		5			
	Oil type		FV 50s					
	Start-up method		Soft start		DC			
Fan	Type		4		5			
	Quantity		4		5			
	Motor output	kW	0.56x4	0.56x2+0.75x2	0.56x4+0.75			
	Static pressure	Pa(in.wg)	20(0.08) default; 60(0.24) customization option					
	Airflow rate	m ³ /h	41200	43800	43400	44400		
	CFM	24250	25780	25544	26133			
Refrigerant	Type		Direct R410A					
	Factory charge	kg/lbs	19x2/41.9x2	19+11x2/41.9+24.3x2	19+13+11/41.9+28.7+24.3			
Pipe connections ²	Liquid pipe	mm(inch)	Φ19.1(3/4)					
	Gas pipe	mm(inch)	Φ41.2(1-5/8)					
Sound pressure level ³			66					
Net dimensions (WxHxD)	mm		(1585x1615x765)x2	(1585x1615x765)+(960x1615x765)x2	(1585x1615x765)+(1250x1615x765)+(960x1615x765)			
	inch		(62-3/8x63-9/16x30-1/8)x2	(62-3/8x63-9/16x30-1/8)+(37-13/16x63-9/16x30-1/8)	(62-3/8x63-9/16x30-1/8)+(49-1/4x63-9/16x30-1/8)+(37-13/16x63-9/16x30-1/8)			
Packed dimensions (WxHxD)	mm		(1650x1810x840)x2	(1650x1810x840)+(1025x1790x830)x2	(1650x1810x840)+(1305x1790x820)+(1025x1790x830)			
	inch		(64-15/160x71-1/4x33-1/16)x2	(64-15/160x71-1/4x33-1/16)+(40-3/8x70-1/2x32-11/16)x2	(64-15/160x71-1/4x33-1/16)+(51-3/8x70-1/2x32-1/4)+(40-3/8x70-1/2x32-11/16)			
Net weight	kg		352x2	352+193x2	352+296+193			
	lbs		776x2	776+425x2	776+653+425			
Gross weight	kg		376x2	376+209x2	376+313+209			
	lbs		829x2	829+461x2	829+690+461			
Ambient temp. Cooling		°C (°F)	-5~-55 (23~-131)					



HP	68		70		72		74		
Model name	MVC-1915WV2WN1		MVC-1965WV2WN1		MVC-2020WV2WN1		MVC-2085WV2WN1		
Combination type	30HP+22HP+16HP		28HP+26HP+16HP		28HP+28HP+16HP		30HP+28HP+16HP		
Power supply	V/Ph/Hz		220/3/50(60)		220/3/50(60)		220/3/50(60)		
Cooling ¹	Capacity	kW	191.5	196.5	202.0	208.5			
		kBtu/h	654.1	671.1	689.9	712.2			
	Power input	kW	59.16	58.38	60.36	63.69			
	EER		3.24	3.37	3.35	3.27			
Connected indoor unit	Total capacity		50-130%						
	Maximum quantity		64						
Compressor	Type		DC inverter						
	Quantity		5		5				
	Oil type		FV 50s						
	Start-up method		Soft start		DC				
Fan	Type		5		5				
	Quantity		4		5				
	Motor output	kW	0.56x4+0.75		0.56x6				
	Static pressure	Pa(in.wg)	20(0.08) default; 60(0.24) customization option						
	Airflow rate	m ³ /h	44400	51800	52800				
	CFM	26133	30489	31077					
Refrigerant	Type		Direct R410A						
	Factory charge	kg/lbs	19+13+11/41.9+28.7+24.3	19x2+11/41.9x2+24.3	19x2+11/41.9x2+24.3				
Pipe connections ²	Liquid pipe	mm(inch)	Φ22.2(7/8)						
	Gas pipe	mm(inch)	Φ44.5(1-3/4)						
Sound pressure level ³			67				68		
Net dimensions (WxHxD)	mm		(1585x1615x765)+(1250x1615x765)+(960x1615x765)	(1585x1615x765)x2+(960x1615x765)					
	inch		(62-3/8x63-9/16x30-1/8)+(49-1/4x63-9/16x30-1/8)+(37-13/16x63-9/16x30-1/8)	(62-3/8x63-9/16x30-1/8)x2+(37-13/16x63-9/16x30-1/8)					
Packed dimensions (WxHxD)	mm		(1650x1810x840)+(1305x1790x820)+(1025x1790x830)	(1650x1810x840)x2+(1025x1790x830)					
	inch		(64-15/160x71-1/4x33-1/16)+(51-3/8x70-1/2x32-11/16)	(64-15/160x71-1/4x33-1/16)x2+(40-3/8x70-1/2x32-11/16)					
Net weight	kg		352+296+193	352x2+193		352x3			
	lbs		776+653+425	776x2+425		776x3			
Gross weight	kg		376+313+209	376x2+209		376x3			
	lbs		829+690+461	829x2+461		829x3			
Ambient temp. Cooling		°C (°F)	-5~-55 (23~-131)						

- Notes:
- Indoor temperature 27°C(80.6°F) DB, 19°C(66.2°F) WB; outdoor temperature 35°C(95°F) DB; equivalent refrigerant piping length 7.5m(24.6ft.) with zero level difference.
 - Diameters given are those for the pipe connecting the outdoor unit combination to the first indoor branch joint for systems with total equivalent liquid piping lengths of less than 90m(295.2ft.). For systems with total equivalent liquid piping lengths of 90m(295.2ft.) or longer, please refer to the VC Pro Series Engineering Data Book for connection piping diameters.
 - Sound pressure level is measured at a position 1m(3.28ft.) in front of the unit and 1.3m(4.26ft.) above the floor in a semi-anechoic chamber.

VRF VC Pro Series - Cooling Only

220V, 3Ph, 50(60)Hz



HP	76		78		80		82		
Model name	MVC-2150WV2WN1		MVC-2185WV2WN1		MVC-2250WV2WN1		MVC-2315WV2WN1		
Combination type	30HP+30HP+16HP		28HP+28HP+22HP		30HP+28HP+22HP		30HP+30HP+22HP		
Power supply	V/Ph/Hz		220/3/50(60)		220/3/50(60)		220/3/50(60)		
Cooling ¹	Capacity	kW	215.0	218.5	225.0	231.5			
		kBtu/h	734.4	746.2	768.4	790.6			
	Power input	kW	67.02	68.01	71.34	74.67			
	EER		3.21	3.21	3.15	3.10			
Connected indoor unit	Total capacity		50-130%						
	Maximum quantity		64						
Compressor	Type		DC inverter						
	Quantity		5		6				
	Oil type		FV 50s						
	Start-up method		Soft start		DC				
Fan	Type		5		6				
	Quantity		5		6				
	Motor output	kW	0.56x4+0.75	0.56x6					
	Static pressure	Pa(in.wg)	20(0.08) default; 60(0.24) customization option						
	Airflow rate	m ³ /h	52800	53400		31430			
	CFM	31077	31430		20 default;60 customization option				
Refrigerant	Type		Direct R410A						
	Factory charge	kg/lbs	19x2+11/41.9x2+24.3	19x2+13/41.9x2+28.7		19x2+13/41.9x2+28.7			
Pipe connections ²	Liquid pipe	mm(inch)	Φ22.2(7/8)						
	Gas pipe	mm(inch)	Φ44.5(1-3/4)						
Sound pressure level ³			68						
Net dimensions (WxHxD)	mm		(1585x1615x765)x2+(960x1615x765)	(1585x1615x765)x2+(1250x1615x765)					
	inch		(62-3/8x63-9/16x30-1/8)x2+(37-13/16x63-9/16x30-1/8)	(62-3/8x63-9/16x30-1/8)x2+(49-1/4x63-9/16x30-1/8)					
Packed dimensions (WxHxD)	mm		(1650x1810x840)x2+(1305x1790x820)	(1650x1810x840)x2+(1305x1790x820)					
	inch		(64-15/160x71-1/4x33-1/16)x2+(40-3/8x70-1/2x32-11/16)	(64-15/160x71-1/4x33-1/16)x2+(51-3/8x70-1/2x32-1/4)					
Net weight	kg		352x2+193	352x2+193		352x2+193			
	lbs		776x2+425	776x2+425		776x2+425			
Gross weight	kg		376x2+209	376x2+209		376x2+209			
	lbs		829x2+461	829x2+461		829x2+461			
Ambient temp. Cooling		°C (°F)	-5~-55 (23~-131)						



HP	84		86		88		90	
Model name	MVC-2355WV2WN1		MVC-2420WV2WN1		MVC-2485WV2WN1		MVC-2550WV2WN1	
Combination type	28HP+28HP+28HP		30HP+28HP+28HP		30HP+30HP+28HP		30HP+30HP+30HP	
Power supply	V/Ph/Hz		220/3/50(60)		220/3/50(60)		220/3/50(60)	
Cooling ¹	Capacity	kW	235.5	242.0	248.5	255.0		
		kBtu/h	804.3	826.5	848.7	870.9		
	Power input	kW	72.54	75.87	79.20	82.53		
	EER		3.25	3.19	3.14	3.09		
Connected indoor unit	Total capacity		50-130%					
	Maximum quantity		64					
Compressor	Type		DC inverter					
	Quantity		6		6			
	Oil type		FV 50s					
	Start-up method		Soft start		DC			
Fan	Type		6		6			
	Quantity		5		6			
	Motor output	kW	0.56x6					
	Static pressure	Pa(in.wg)	20(0.08) default; 60(0.24) customization option					
	Airflow rate	m ³ /h	61800	36374		352x3		
	CFM	36374	31077		20 default;60 customization option			
Refrigerant	Type		Direct R410A					
	Factory charge	kg/lbs	19x3/41.9x3	19x3/41.9x3		19x3/41.9x3		
Pipe connections ²	Liquid pipe	mm(inch)	Φ25.4(1)					
	Gas pipe	mm(inch)	Φ50.8(2)					
Sound pressure level ³			68					
Net dimensions (WxHxD)	mm		(1585x1615x765)x3		(62-3/8x63-9/16x30-1/8)x3			
	inch		(62-3/8x63-9/16x30-1/8)x3		(1650x1810x840)x3			
Packed dimensions (WxHxD)	mm		(1650x1810x840)x3		(64-15/160x71-1/4x33-1/16)x3			
	inch		(64-15/160x71-1/4x33-1/16)x3		(64-15/160x71-1/4x33-1/16)x3			
Net weight	kg		352x3		776x3			
	lbs		776x3		776x3			
Gross weight	kg		376x3		829x3			
	lbs		829x3		829x3			
Ambient temp. Cooling		°C (°F)	-5~-55 (23~-131)					

- Notes:
- Indoor temperature 27°C(80.6°F) DB, 19°C(66.2°F) WB; outdoor temperature 35°C(95°F) DB; equivalent refrigerant piping length 7.5m(24.6ft.) with zero level difference.
 - Diameters given are those for the pipe connecting the outdoor unit combination to the first indoor branch joint for systems with total equivalent liquid piping lengths of less than 90m(295.2ft.). For systems with total equivalent liquid piping lengths of 90m(295.2ft.) or longer, please refer to the VC Pro Series Engineering Data Book for connection piping diameters.
 - Sound pressure level is measured at a position 1m(3.28ft.) in front of the unit and 1.3m(4.26ft.) above the floor in a semi-anechoic chamber.

Indoor Units
VRF V4 Plus indoor units

Ventilation
Heat recovery ventilator (HRV)

Control Systems
Smart control systems




VRF V4 Plus R Series Heat Recovery

Offers simultaneous cooling and heating operation in one system

- ▶ ALL DC inverter compressors
- ▶ ALL DC fan motors
- ▶ Capacity up to 64HP
- ▶ Connectable indoor units quantity up to 64
- ▶ ESP up to 60Pa
- ▶ Cycle duty operation
- ▶ Backup operation
- ▶ Precise oil control technology
- ▶ Advanced silence technology
- ▶ Simple communication wiring
- ▶ Remote addressing
- ▶ Easy maintenance


Heat Recovery, EER up to 7.0

Heat recovery is achieved by diverting exhaust heat from indoor units in cooling mode to areas requiring heating, maximizing energy efficiency, reducing electricity costs and leading to high partload efficiencies (up to 7.0 in the 8HP category).

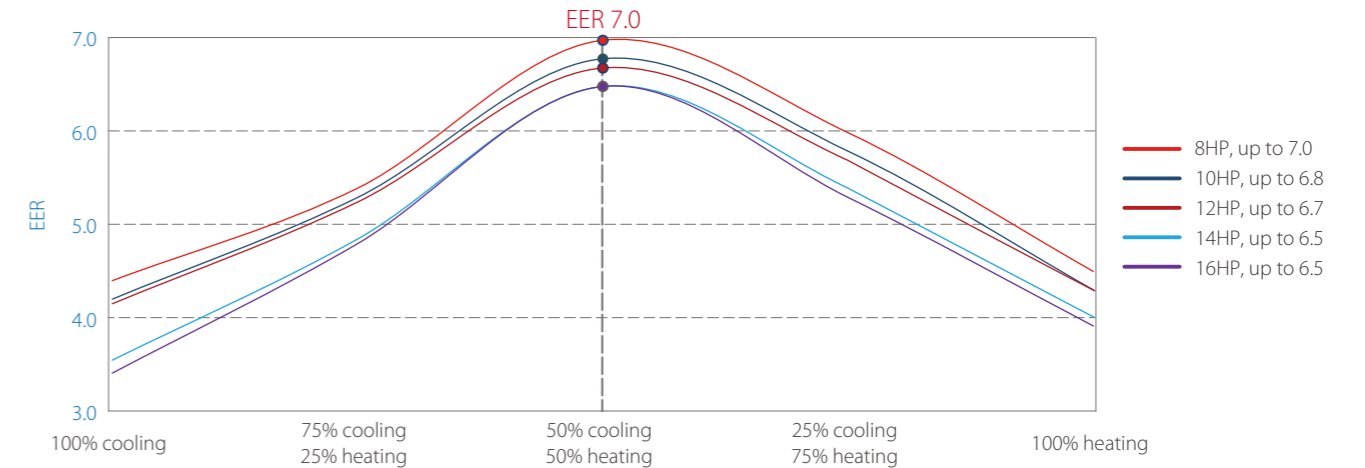

EER in simultaneous cooling and heating mode are based on the following condition:
Outdoor temperature 7°CDB/6°CWB, indoor temperature 27°CDB/19°CWB for cooling, indoor temperature 20°CDB for heating.

Long Piping Capability

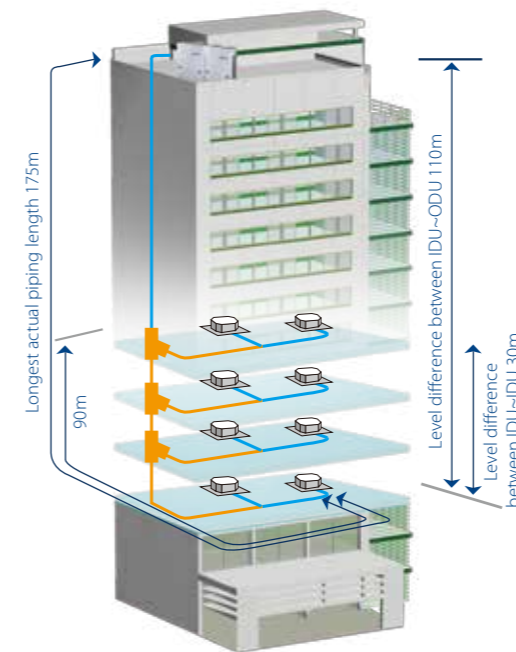


Piping length	Capability
Total piping length	1000m
Longest length - actual (equivalent)	175m (200m)
Longest length after first branch	90m*
Longest length from MS to its downstream indoor unit	40m
Largest height difference between indoor and outdoor units - ODU up (down)	70m (110m)
Largest height difference between indoor units	30m

*The longest length after first branch is 40m as standard but can be extended to up to 90m under certain conditions. Please contact your local Midea dealer for further information.


Adjustable Outdoor Heat Exchanger

Two parts condenser individual design, the unit can distribute a part of evaporator to be as condensing area according to the heating load requirement to improve the utilization rate of the condenser.

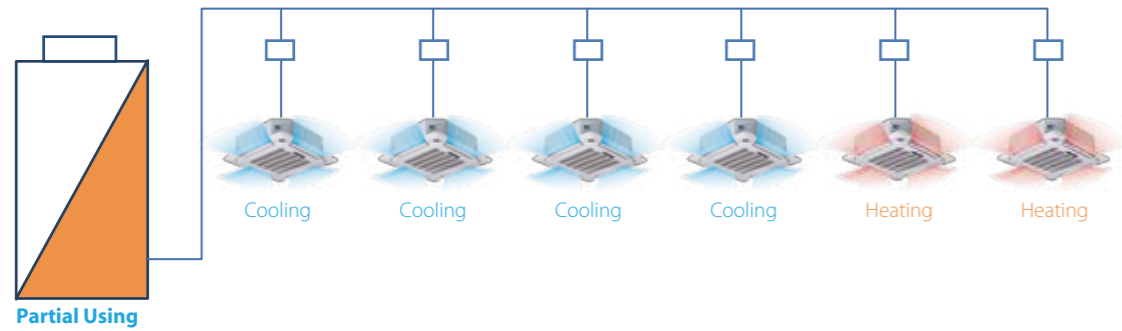


Continuous Heating During Defrost Operation

Each heat exchanger is defrosted by using heat transferred from one heat exchanger to the other in the outdoor unit. Defrost has no impact on the indoor unit on heating mode.

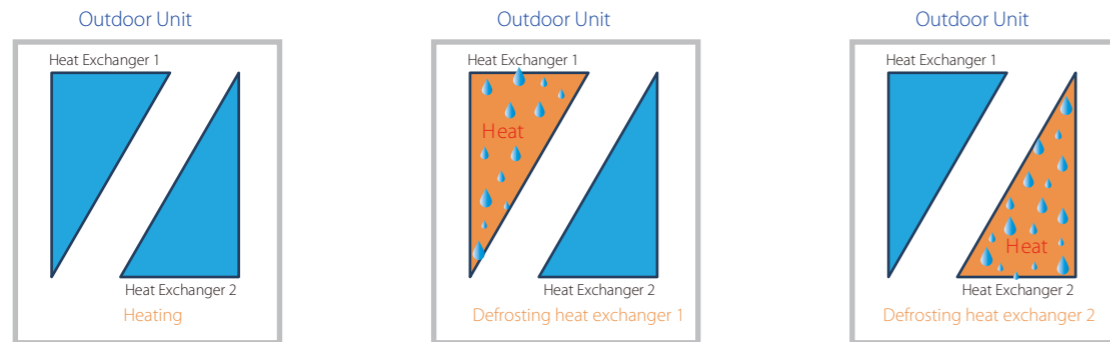

Auto Mode Control

Under the Auto Mode, the indoor unit can change the operation mode automatically, to keep the indoor temperature at a constant level.

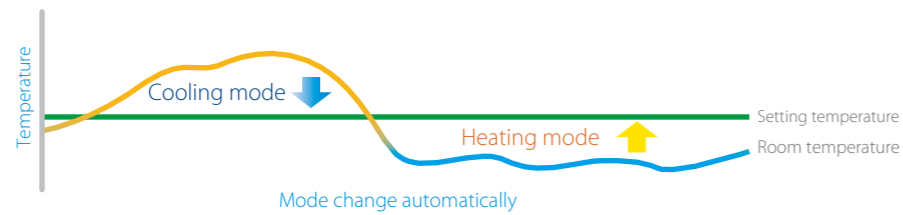

Note: Auto Mode can be activated only with certain wired controller KJR-120B.


Innovative Mode Switch (MS) Box

Simultaneous cooling and heating achieved for new designed MS (Mode Switch) box.

- ▶ Low noise operation for precise control of multiple solenoid valves;
- ▶ Max. 24 indoor units connect to a MS box;
- ▶ Max. 56kW indoor units connect to a MS box;



- ▶ Indoor units connected to a same MS can realize simultaneous cooling and heating operation.

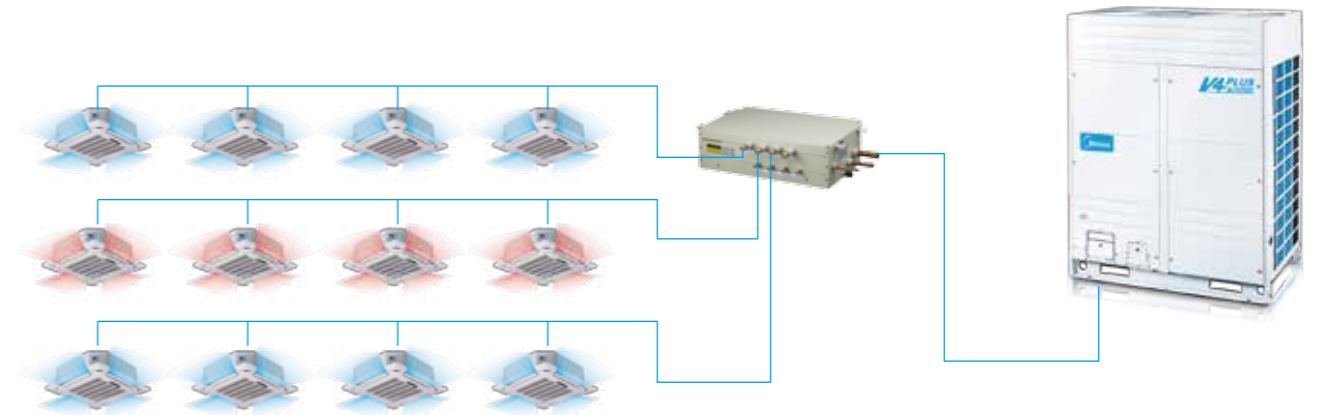

Rotatable Control Box

Newly designed rotating control box can rotate in a wide angle. It is convenient for the inspection and maintenance of the pipeline system and greatly reduces the dismount time of the electric control box.



VRF V4 Plus R Series - Heat Recovery

380~415V, 3N, 50(60)Hz



HP	8		10		12		14		16		
Model MDV-	252(8)W/D2RN1T(C)		280(10)W/D2RN1T(C)		335(12)W/D2RN1T(C)		400(14)W/D2RN1T(C)		450(16)W/D2RN1T(C)		
Combined type	8HP		10HP		12HP		14HP		16HP		
Power supply	V/N/Hz		380-415/3/50(60)		380-415/3/50(60)		380-415/3/50(60)		380-415/3/50(60)		
Cooling	Capacity	kW	25.2	28	33.5	40	45	45	45	45	
	Power input	kW	5.73	6.67	8.07	11.3	13.24	13.24	13.24	13.24	
	EER		4.4	4.2	4.15	3.54	3.4	3.4	3.4	3.4	
Heating	Capacity	kW	27	31.5	37.5	45	50	50	50	50	
	Power input	kW	6	7.33	8.72	11.19	12.79	12.79	12.79	12.79	
	COP		4.5	4.3	4.3	4.02	3.91	3.91	3.91	3.91	
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity									
	Max. quantity	13		16		20		23		26	
Compressor	Type	DC inverter									
	Quantity	1		1		1		2		2	
Fan motor	Type	DC motor									
	Quantity	2		2		2		2		2	
	Static pressure	Pa	20-40 (customized)				0-20 (default)		20-40 (customized)		
Refrigerant	Type	R410A									
	Factory charging	kg	10		10		13		13		
Pipe connections	Liquid pipe	mm	Φ12.7		Φ12.7		Φ15.9		Φ15.9		
	Low pressure gas pipe	mm	Φ22.2		Φ22.2		Φ25.4		Φ28.6		
	High pressure gas pipe	mm	Φ19.1		Φ19.1		Φ19.1		Φ22.2		
	High pressure gas balance pipe	mm	Φ19.1		Φ19.1		Φ19.1		Φ19.1		
	Oil balance pipe	mm	Φ6.35		Φ6.35		Φ6.35		Φ6.35		
	Air flow rate	m ³ /h	12000		12000		13000		15000		
Sound pressure level	dB(A)	57		57		58		60			
Net dimension (WxHxD)	mm	1250x1615x765									
Packing size (WxHxD)	mm	1305x1790x820									
Net weight	kg	255		255		255		303			
Gross weight	kg	273		273		273		322			
Operating temperature range	°C	Cooling: -5~48; Heating: -20~24; Simultaneous Cooling and Heating: -5~24									



HP	18		20		22		24			
Model MDV-	532(18)W/D2RN1T(C)		560(20)W/D2RN1T(C)		615(22)W/D2RN1T(C)		680(24)W/D2RN1T(C)			
Combined type	8HP+10HP		10HPx2		10HP+12HP		10HP+14HP			
Power supply	V/N/Hz		380-415/3/50(60)		380-415/3/50(60)		380-415/3/50(60)			
Cooling	Capacity	kW	53.2	56	61.5	68	68	68		
	Power input	kW	12.4	13.34	14.74	17.97	17.97	17.97		
	EER		4.29	4.2	4.17	3.78	3.78	3.78		
Heating	Capacity	kW	58.5	63	69	76.5	76.5	76.5		
	Power input	kW	13.33	14.66	16.05	18.52	18.52	18.52		
	COP		4.39	4.3	4.3	4.13	4.13	4.13		
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity								
	Max. quantity	29		33		36		39		
Compressor	Type	DC inverter								
	Quantity	2		2		2		3		
Fan motor	Type	DC motor								
	Quantity	4		4		4		4		
Refrigerant	Type	R410A								
	Factory charging	kg	10x2		10x2		10x2		10+13	
Pipe connections	Liquid pipe	mm	Φ15.9		Φ15.9		Φ15.9		Φ15.9	
	Low pressure gas pipe	mm	Φ31.8		Φ31.8		Φ31.8		Φ34.9	
	High pressure gas pipe	mm	Φ28.6		Φ28.6		Φ28.6		Φ28.6	
	High pressure gas balance pipe	mm	Φ19.1		Φ19.1		Φ19.1		Φ19.1	
	Oil balance pipe	mm	Φ6.35		Φ6.35		Φ6.35		Φ6.35	
	Air flow rate	m ³ /h	24000		24000		25000		27000	
Sound pressure level	dB(A)	61		61		62		63		
Net dimension (WxHxD)	mm	(1250x1615x765)x2								
Packing size (WxHxD)	mm	(1305x1790x820)x2								
Net weight	kg	255x2		255x2		255x2		255+303		
Gross weight	kg	273x2		273x2		273x2		273+322		
Operating temperature range	°C	Cooling: -5~48; Heating: -20~24; Simultaneous Cooling and Heating: -5~24								

Notes:

Capacities are based on the following conditions:

Cooling: Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB; Heating: Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB.

Piping length: Interconnecting piping length is 7.5m, level difference is zero.

Connection piping diameter of single-unit is the stop valve diameter of the unit.

Connection piping diameter of multi-unit is the main pipe connecting to the first indoor branch joint, in case of the total equivalent liquid length is less than 90m. If the total equivalent liquid length is more than 90m, please refer to technical manual to choose the connection piping diameter.

Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.

VRF V4 Plus R Series - Heat Recovery

380~415V, 3N, 50(60)Hz



HP	26		28		30		32			
Model MDV-	730(26)W/D2RN1T(C)		800(28)W/D2RN1T(C)		850(30)W/D2RN1T(C)		900(32)W/D2RN1T(C)			
Combined type	10HP+16HP		14HPx2		14HP+16HP		16HPx2			
Power supply	V/N/Hz		380-415/3/50(60)		380-415/3/50(60)		380-415/3/50(60)			
Cooling	Capacity	kW	73	80	85	90	90	90		
	Power input	kW	19.9	22.6	24.54	26.48	26.48	26.48		
	EER		3.67	3.54	3.46	3.4	3.4	3.4		
Heating	Capacity	kW	81.5	90	95	100	100	100		
	Power input	kW	20.1	22.4	23.98	25.58	25.58	25.58		
	COP		4.05	4.02	3.96	3.91	3.91	3.91		
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity								
	Max. quantity	43		46		50		53		
Compressor	Type	DC inverter								
	Quantity	3		4		4		4		
Fan motor	Type	DC motor								
	Quantity	4		4		4		4		
Refrigerant	Type	R410A								
	Factory charging	kg	10+13		13x2		13x2		13x2	
Pipe connections	Liquid pipe	mm	Φ19.1							
	Low pressure gas pipe	mm	Φ34.9							
	High pressure gas pipe	mm	Φ28.6							
	High pressure gas balance pipe	mm	Φ19.1							
	Oil balance pipe	mm	Φ6.35							
	Air flow rate	m ³ /h	27000		30000		30000		30000	
Sound pressure level	dB(A)	63		64		64		64		
Net dimension (WxHxD)	mm	(1250x1615x765)x2								
Packing size (WxHxD)	mm	(1305x1790x820)x2								
Net weight	kg	255+303		303x2		303x2		303x2		
Gross weight	kg	273+322		322x2		322x2		322x2		
Operating temperature range	°C	Cooling: -5~48; Heating: -20~24; Simultaneous Cooling and Heating: -5~24								



HP	34		36		38		40			
Model MDV-	960(34)W/D2RN1T(C)		1010(36)W/D2RN1T(C)		1065(38)W/D2RN1T(C)		1130(40)W/D2RN1T(C)			
Combined type	10HPx2+14HP		10HPx2+16HP		10HP+12HP+16HP		10HP+14HP+16HP			
Power supply	V/N/Hz		380-415/3/50(60)		380-415/3/50(60)		380-415/3/50(60)			
Cooling	Capacity	kW	96	101	106.5	113	113	113		
	Power input	kW	24.64	26.58	27.98	31.21	31.21	31.21		
	EER		3.9	3.8	3.81	3.62	3.62	3.62		
Heating	Capacity	kW	108	113	119	126.5	126.5	126.5		
	Power input	kW	25.85	27.45	28.84	31.31	31.31	31.31		
	COP		4.18	4.12	4.13	4.04	4.04	4.04		
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity								
	Max. quantity	56		59		63		64		
Compressor	Type	DC inverter								
	Quantity	4		4		4		5		
Fan motor	Type	DC motor								
	Quantity	6		6		6		6		
Refrigerant	Type	R410A								
	Factory charging	kg	10x2+13		10x2+13		10x2+13		10+13x2	
Pipe connections	Liquid pipe	mm	Φ19.1							
	Low pressure gas pipe	mm	Φ41.3							
	High pressure gas pipe	mm	Φ34.9							
	High pressure gas balance pipe	mm	Φ19.1							
	Oil balance pipe	mm	Φ6.35							
	Air flow rate	m ³ /h	39000		39000		40000		42000	
Sound pressure level	dB(A)	65		65		65		66		
Net dimension (WxHxD)	mm	(1250x1615x765)x3								
Packing size (WxHxD)	mm	(1305x1790x820)x3								
Net weight	kg	255x2+303		255x2+303		255x2+303		255+303x2		
Gross weight	kg	273x2+322		273x2+322		273x2+322		273+322x2		
Operating temperature range	°C	Cooling: -5~48; Heating: -20~24; Simultaneous Cooling and Heating: -5~24								

Notes:

Capacities are based on the following conditions:

Cooling: Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB; Heating: Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB.

Piping length: Interconnecting piping length is 7.5m, level difference is zero.

Connection piping diameter of single-unit is the stop valve diameter of the unit.

Connection piping diameter of multi-unit is the main pipe connecting to the first indoor branch joint, in case of the total equivalent liquid length is less than 90m. If the total equivalent liquid length is more than 90m, please refer to technical manual to choose the connection piping diameter.

Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.

VRF V4 Plus R Series - Heat Recovery

380~415V, 3N, 50(60)Hz



HP		42	44	46	48	
Model MDV-		1200(42)W/D2RN1T(C)	1250(44)W/D2RN1T(C)	1300(46)W/D2RN1T(C)	1350(48)W/D2RN1T(C)	
Combined type		14HPx3	14HPx2+16HP	14HP+16HPx2	16HPx3	
Power supply	V/N/Hz	380-415/3/50(60)				
Cooling	Capacity	kW	120	125	130	
	Power input	kW	33.9	35.84	37.78	
	EER		3.54	3.49	3.44	
Heating	Capacity	kW	135	140	145	
	Power input	kW	33.57	35.17	36.77	
	COP		4.02	3.98	3.94	
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity				
	Max. quantity	64				
Compressor	Type	DC inverter				
	Quantity	6				
Fan motor	Type	DC motor				
	Quantity	6				
Refrigerant	Type	R410A				
	Factory charging	kg	13x3			
Pipe connections	Liquid pipe	mm	Φ19.1			
	Low pressure gas pipe	mm	Φ41.3			
	High pressure gas pipe	mm	Φ34.9			
	High pressure gas balance pipe	mm	Φ19.1			
	Oil balance pipe	mm	Φ6.35			
Air flow rate	m ³ /h	45000				
Sound pressure level	dB(A)	67				
Net dimension (WxHxD)	mm	(1250x1615x765)x3				
Packing size (WxHxD)	mm	(1305x1790x820)x3				
Net weight	kg	303x3				
Gross weight	kg	322x3				
Operating temperature range	°C	Cooling: -5~48; Heating: -20~24; Simultaneous Cooling and Heating: -5~24				



HP		50	52	54	56	
Model MDV-		1432(50)W/D2RN1T(C)	1460(52)W/D2RN1T(C)	1515(54)W/D2RN1T(C)	1580(56)W/D2RN1T(C)	
Combined type		8HP+10HP+16HPx2	10HPx2+16HPx2	10HP+12HP+16HPx2	10HP+14HP+16HPx2	
Power supply	V/N/Hz	380-415/3/50(60)				
Cooling	Capacity	kW	143.2	146	151.5	
	Power input	kW	38.88	39.82	41.22	
	EER		3.68	3.67	3.68	
Heating	Capacity	kW	158.5	163	169	
	Power input	kW	38.91	40.24	41.63	
	COP		4.07	4.05	4.06	
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity				
	Max. quantity	64				
Compressor	Type	DC inverter				
	Quantity	6				
Fan motor	Type	DC motor				
	Quantity	8				
Refrigerant	Type	R410A				
	Factory charging	kg	10x2+13x2	10x2+13x2	10x2+13x2	10+13x3
Pipe connections	Liquid pipe	mm	Φ22.2			
	Low pressure gas pipe	mm	Φ44.5			
	High pressure gas pipe	mm	Φ38.1			
	High pressure gas balance pipe	mm	Φ19.1			
	Oil balance pipe	mm	Φ6.35			
Air flow rate	m ³ /h	54000	54000	55000	57000	
Sound pressure level	dB(A)	68				
Net dimension (WxHxD)	mm	(1250x1615x765)x4				
Packing size (WxHxD)	mm	(1305x1790x820)x4				
Net weight	kg	255x2+303x2	255x2+303x2	255x2+303x2	255+303x3	
Gross weight	kg	273x2+322x2	273x2+322x2	273x2+322x2	273+322x3	
Operating temperature range	°C	Cooling: -5~48; Heating: -20~24; Simultaneous Cooling and Heating: -5~24				

Notes:

Capacities are based on the following conditions:

Cooling: Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB; Heating: Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB.

Piping length: Interconnecting piping length is 7.5m, level difference is zero.

Connection piping diameter of single-unit is the stop valve diameter of the unit.

Connection piping diameter of multi-unit is the main pipe connecting to the first indoor branch joint, in case of the total equivalent liquid length is less than 90m. If the total equivalent liquid length is more than 90m, please refer to technical manual to choose the connection piping diameter.

Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.

VRF V4 Plus R Series - Heat Recovery

380~415V, 3N, 50(60)Hz



HP		58	60	62	64	
Model MDV-		1650(58)W/D2RN1T(C)	1700(60)W/D2RN1T(C)	1750(62)W/D2RN1T(C)	1800(64)W/D2RN1T(C)	
Combined type		14HPx3+16HP	14HPx2+16HPx2	14HP+16HPx3	16HPx4	
Power supply	V/N/Hz	380-415/3/50(60)				
Cooling	Capacity	kW	165	170	175	
	Power input	kW	47.14	49.08	51.02	
	EER		3.5	3.46	3.43	
Heating	Capacity	kW	185	190	195	
	Power input	kW	46.36	47.96	49.56	
	COP		3.99	3.96	3.93	
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity				
	Max. quantity	64				
Compressor	Type	DC inverter				
	Quantity	8				
Fan motor	Type	DC motor				
	Quantity	8				
Refrigerant	Type	R410A				
	Factory charging	kg	13x4			
Pipe connections	Liquid pipe	mm	Φ22.2			
	Low pressure gas pipe	mm	Φ44.5			
	High pressure gas pipe	mm	Φ38.1			
	High pressure gas balance pipe	mm	Φ19.1			
	Oil balance pipe	mm	Φ6.35			
Air flow rate	m ³ /h	60000				
Sound pressure level	dB(A)	69				
Net dimension (WxHxD)	mm	(1250x1615x765)x4				
Packing size (WxHxD)	mm	(1305x1790x820)x4				
Net weight	kg	303x4				
Gross weight	kg	322x4				
Operating temperature range	°C	Cooling: -5~48; Heating: -20~24; Simultaneous Cooling and Heating: -5~24				

VRF V4 Plus R Series - MS Box



Model		MS01/N1-C	MS02/N1-C	MS04/N1-C	MS06/N1-C	MS02E/N1-C	MS04E/N1-C
Applicable indoor units		All VRF indoor units except high static pressure duct				Only high static pressure duct	
Max. indoor unit groups		1	2	4	6	1	1
Max. number of each group of indoor units		4	4	4	4	1	1
Max. number of downstream indoor units		4	8	16	24	1	1
Max. capacity of each group of indoor units	kW	16	16	16	16	20/25/28	40/45/56
Max. total capacity of all downstream indoor units	kW	16	28	45	45	20-28	40-56
Piping connections	Connected to outdoor unit	Liquid pipe	mm	Φ9.53	Φ12.7	Φ15.9	Φ15.9
		High pressure gas pipe	mm	Φ15.9	Φ19.1	Φ22.2	Φ22.2
		Low pressure gas pipe	mm	Φ19.1	Φ25.4	Φ31.8	Φ31.8
	Connected to indoor unit	Liquid pipe	mm	Φ9.53	Φ9.53	Φ9.53	Φ9.53
Gas pipe		mm	Φ15.9	Φ15.9	Φ15.9	Φ15.9	
Sound pressure level	dB(A)	33	33	33	40	33	33
Net dimension (WxHxD)	mm	630x225x600	630x225x600	960x225x600	960x225x600	630x225x600	960x225x600
Packing size (WxHxD)	mm	725x325x685	725x325x685	1055x325x685	1055x325x685	725x325x685	1055x325x685
Net weight	kg	18	19.5	31	35	19.5	31
Gross weight	kg	25	27	40	44.5	27	40

Note:

Sound values are measured in a semi-anechoic room, at a position 1m below the MS equipment in mode switch condition.

It is not recommended to install in a place where low noise performance is required.

Indoor Units
VRF V4 Plus indoor units

Fresh Air Processing Unit
100% fresh air supply

Ventilation
Heat recovery ventilator (HRV)

AHU Connection Kit
Connect to other brand AHU

Control Systems
Smart control systems



VRF V4 Plus W Series Water Cooled

Perfect combined of water and refrigerant system


- ▶ DC inverter compressors
- ▶ Capacity up to 36HP
- ▶ Connectable indoor units quantity up to 59
- ▶ Cycle duty operation
- ▶ Backup operation
- ▶ Precise oil control technology
- ▶ Low noise operation
- ▶ Simple communication wiring
- ▶ Easy maintenance

Wide Range of Outdoor Units

The Water Cooled V4+W Series capacity ranges from 8HP to 36HP, meets all customer requirements from small to large buildings.




Long Piping Capability

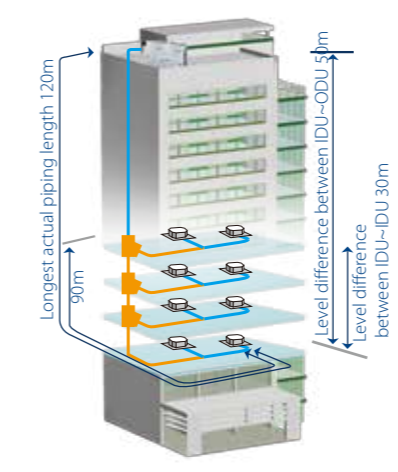

Piping length	Capability
Total piping length	300m
Longest length - actual (equivalent)	120m (150m)
Longest length after first branch	90m*
Largest height difference between indoor and outdoor units - ODU up (down)	50m (40m)
Largest height difference between indoor units	30m

*The longest length after first branch is 40m as standard but can be extended to up to 90m under certain conditions. Please contact your local Midea dealer for further information.


Wide Operation Temperature Range

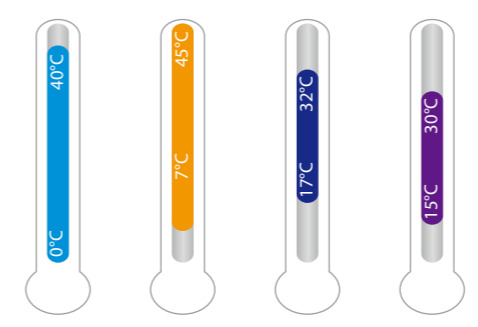

- Main unit ambient temperature: 0°C~40°C
- Main unit water inlet temperature: 7°C~45°C
- Indoor temperature in cooling mode: 17°C~32°C
- Indoor temperature in heating mode: 15°C~30°C

High IPLV

Midea V4 Plus W Series System combines water system and refrigerant system perfectly. IPLV(C) reaches as high as 5.9. Compared with air-cooled VRF, energy saving is higher.

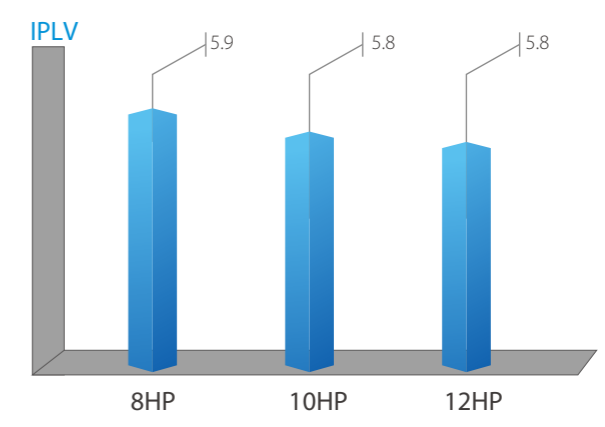


High Efficiency Double-Pipe Heat Exchanger

With the innovatively designed double-pipe heat exchanger, the water quality required is low. The water side has large circulation area, and it is not easily plugged, creating higher reliability and easier cleaning and maintenance.




Water Side Heat Recovery Function

In modern large-scale buildings, the load between the internal and external areas is different. It may occur in some situations that both cooling and heating are required. The V4 PLUS W Series not only can achieve meticulous system division in different areas but also can recover heat at the same time, significantly improving energy efficiency.

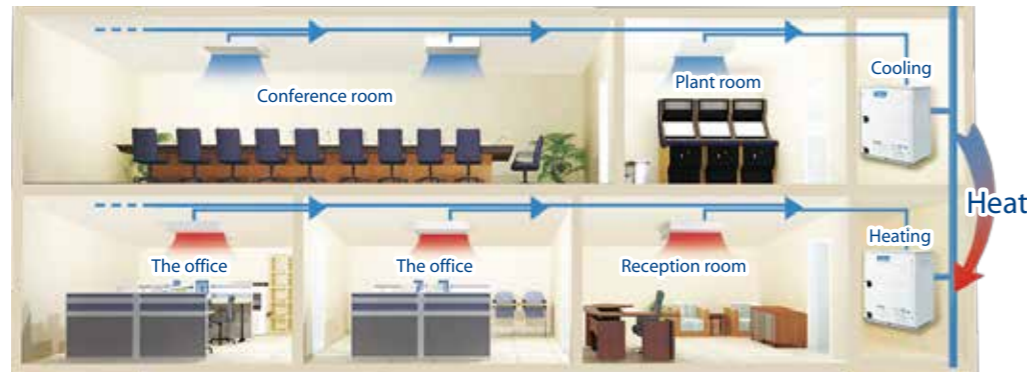

No Water Leakage

No water pipes installed indoors, no water leakage risks.

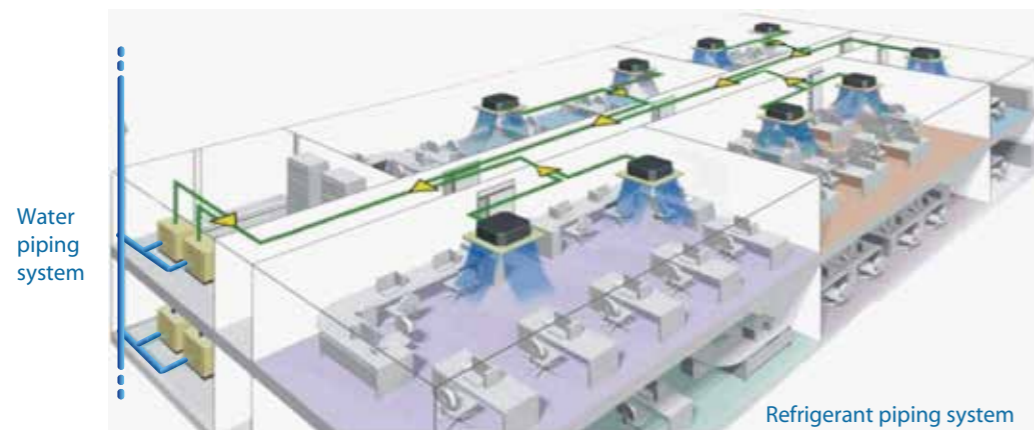

VRF V4 Plus W Series - Water Cooled

380~415V, 3N, 50(60)Hz



HP		8	10	12	16	18	20	22
Model (380~415V, 3N, 50Hz) MDVS-		252(8)W/DRN1	280(10)W/DRN1	335(12)W/DRN1	504(16)W/DRN1	532(18)W/DRN1	560(20)W/DRN1	615(22)W/DRN1
Model (380~415V, 3N, 60Hz) MDVS-		252(8)W/DCN1	280(10)W/DCN1	335(12)W/DCN1	504(16)W/DCN1	532(18)W/DCN1	560(20)W/DCN1	615(22)W/DCN1
Combined type		/	/	/	8HPx2	8HP+10HP	10HPx2	10HP+12HP
Cooling	Capacity	kW	25.2	28.0	33.5	50.4	53.2	56.0
	Power input	kW	4.80	6.10	8.00	9.60	10.90	12.20
	EER		5.25	4.59	4.19	5.25	4.88	4.59
Heating	Capacity	kW	27.0	31.5	37.5	54.0	58.5	63.0
	Power input	kW	4.45	5.83	7.80	8.90	10.3	11.66
	COP		6.07	5.40	4.81	6.07	5.69	5.40
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity						
	Max. quantity	13	16	19	23	29	33	36
Compressor	Type	DC inverter						
	Quantity	1	1	1	2	2	2	2
Heat exchanger	Type	Double-pipe heat exchanger						
	Rated water flow volume	m ³ /h	5.4	6	7.2	5.4x2	5.4+6	6x2
Refrigerant	Type	R410A						
	Factory charging	kg	2	2	2	2x2	2x2	2x2
Pipe connections	Liquid pipe	mm	Φ12.7	Φ12.7	Φ15.9	Φ12.7	Φ15.9	Φ15.9
	Gas pipe	mm	Φ25.4	Φ25.4	Φ31.8	Φ28.6	Φ28.6	Φ28.6
	Oil balance pipe	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35
Sound pressure level	dB(A)	51	52	52	53	53	53	54
Net dimension (WxHxD)	mm	780x1000x550			(780x1000x550)x2			
Packing size (WxHxD)	mm	845x1170x600			(845x1170x600)x2			
Net weight	kg	146	146	147	146x2	146x2	146x2	146+147
Gross weight	kg	155	155	156	155x2	155x2	155x2	155+156
Operating temperature range	°C	Water inlet temp.: 7-45; ambient temp.: 0-40						



HP		24	26	28	30	32	34	36
Model (380~415V, 3N, 50Hz) MDVS-		670(24)W/DRN1	784(26)W/DRN1	812(28)W/DRN1	840(30)W/DRN1	895(32)W/DRN1	950(34)W/DRN1	1005(36)W/DRN1
Model (380~415V, 3N, 60Hz) MDVS-		670(24)W/DCN1	784(26)W/DCN1	812(28)W/DCN1	840(30)W/DCN1	895(32)W/DCN1	950(34)W/DCN1	1005(36)W/DCN1
Combined type		12HPx2	8HPx2+10HP	8HP+10HPx2	10HPx3	10HPx2+12HP	10HP+12HPx2	12HPx3
Cooling	Capacity	kW	67.0	78.4	81.2	84.0	89.5	95.0
	Power input	kW	16.0	15.7	17.0	18.3	20.2	22.1
	EER		4.19	4.99	4.78	4.59	4.43	4.30
Heating	Capacity	kW	75.0	85.5	90.0	94.5	100.5	106.5
	Power input	kW	15.6	14.73	16.11	17.49	19.46	21.43
	COP		4.81	5.80	5.59	5.40	5.16	4.97
Connectable indoor unit	Total capacity	50~130% of outdoor unit capacity						
	Max. quantity	39	43	46	50	53	56	59
Compressor	Type	DC inverter						
	Quantity	2	3	3	3	3	3	3
Heat exchanger	Type	Double-pipe heat exchanger						
	Rated water flow volume	m ³ /h	7.2x2	5.4x2+6	5.4+6x2	6x3	6x2+7.2	6+7.2x2
Refrigerant	Type	R410A						
	Factory charging	kg	2x2	2x3	2x3	2x3	2x3	2x3
Pipe connections	Liquid pipe	mm	Φ15.9	Φ19.1	Φ19.1	Φ19.1	Φ19.1	Φ19.1
	Gas pipe	mm	Φ28.6	Φ31.8	Φ31.8	Φ31.8	Φ31.8	Φ38.1
	Oil balance pipe	mm	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35	Φ6.35
Sound pressure level	dB(A)	54	55	55	56	57	57	58
Net dimension (WxHxD)	mm	(780x1000x550)x2		(780x1000x550)x3				
Packing size (WxHxD)	mm	(845x1170x600)x2		(845x1170x600)x3				
Net weight	kg	147x2	146x3	146x3	146x3	146x2+147	146+147x2	147x3
Gross weight	kg	156x2	155x3	155x3	155x3	155x2+156	155+156x2	156x3
Operating temperature range	°C	Water inlet temp.: 7-45; ambient temp.: 0-40						

Notes:

Capacities are based on the following conditions:

Cooling: Indoor temperature 27°C DB/19°C WB; Main unit ambient temperature 35°C DB/24°C WB; Water inlet temperature 30°C;


Heating: Indoor temperature 20°C DB/15°C WB; Main unit ambient temperature 7°C DB/6°C WB; Water inlet temperature 20°C;


Piping length: Interconnecting piping length is 5m, level difference is zero.


Connection piping diameter of single-unit is the stop valve diameter of the unit.

Connection piping diameter of multi-unit is the main pipe connecting to the first indoor branch joint, in case of the total equivalent liquid length is less than 90m. If the total equivalent liquid length is more than 90m, please refer to technical manual to choose the connection piping diameter.

Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1m above the floor.

 **Indoor Units**
VRF V4 Plus indoor units


 **Ventilation**
Heat recovery ventilator (HRV)

 **Control Systems**
Smart control systems



Long Piping Capability

Piping length	Capacity		
	20/22.4/26kW	28/33.5kW	40/45kW
Total piping length	120m	150m	250m
Longest length - actual (equivalent)	60m (70m)	100(110)m	100m (120m)
Longest length after first branch	20m	40m	40m
Longest length after nearest branch	15m	15m	15m
Largest height difference between indoor and outdoor units - ODU up (down)	30m (20m)	50m(40m)	30m (20m)
Largest height difference between indoor units	8m	15m	8m

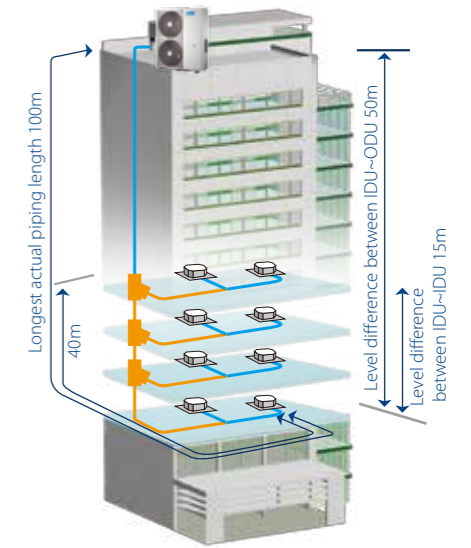

VRF V4 Plus I Series Heat Pump

Optimized design for middle-sized buildings


- ▶ DC inverter compressor
- ▶ DC fan motor
- ▶ Capacity up to 16HP
- ▶ Connectable indoor units quantity up to 20
- ▶ Precise oil control technology
- ▶ Advanced silence technology
- ▶ Intelligent defrosting technology
- ▶ Simple communication wiring
- ▶ Auto addressing
- ▶ Easy maintenance


VRF V4 Plus I Series - Heat Pump




HP			7	8	9	10	12	14	16		
Model			MDV-V200W/DRN1	MDV-V224W/DRN1	MDV-V260W/DRN1	MDVT-V280W/DGN1	MDVT-V335W/DGN1	MDV-V400W/DRN1	MDV-V450W/DRN1		
Power supply			V/N/Hz			380-415/3/50			380-415/3/50 (60)		
Cooling (T1/T3)	Capacity	kW	20.0	22.4	26.0	28.0/25.0	33.5/28.0	40.0	45.0		
	Power input	kW	6.1	6.8	7.6	6.83/7.9	9.2/10.0	11.9	13.6		
	EER		3.28	3.29	3.42	4.10/3.16	3.64/2.80	3.35	3.32		
Heating	Capacity	kW	22.0	24.5	28.5	31.5	37.5	45.0	50.0		
	Power input	kW	6.1	5.9	6.8	7.5	9.2	11.1	12.7		
	COP		3.61	4.15	4.19	4.20	4.08	4.05	3.93		
Connectable indoor unit	Total capacity		50~130% of outdoor unit capacity								
	Max. quantity		10	11	12	16	20	14	15		
Compressor	Type		DC inverter								
	Quantity		1	1	1	1	1	2	2		
Fan motor	Type		DC motor			DC motor		DC motor + AC motor			
	Quantity		2	2	2	2	2	2	2		
Refrigerant	Type		R410A								
	Factory charging	kg	4.8	6.2	6.2	8	8	9	12		
Pipe connections	Liquid pipe	mm	Φ9.53	Φ9.53	Φ9.53	Φ9.5	Φ12.7	Φ12.7	Φ12.7		
	Gas pipe	mm	Φ19.1	Φ19.1	Φ22.2	Φ22.2	Φ25.4	Φ22.2	Φ25.4		
Air flow rate	m ³ /h	10999	10494	10494	11000	11300	16575	16575			
Sound pressure level	dB(A)	59	59	60	59	61	62	62			
Net dimension (WxHxD)	mm	1120x1558x528			1120x1558x528			1360x1650x540	1460x1650x540		
	mm	1270x1720x565			1270x1720x565			1450x1785x560	1550x1785x560		
Net weight	kg	137	146.5	147	157			240	275		
Gross weight	kg	153	162.5	163	173			260	290		
Operating temperature range	°C	Cooling: -15~46; Heating: -15~24				Coolin: -5~54 Heating: -20~24		Cooling: -5~48; Heating: -15~24			

Notes:
Capacities are based on the following conditions:
T1 Cooling: Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB.
T3 Cooling: Indoor temperature 29°C DB/19°C WB; Outdoor temperature 46°C DB/24°C WB.
Heating: Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB.
Piping length: Interconnecting piping length 7.5m, level difference of zero.
Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1m above the floor.

 **Indoor Units**
VRF V4 Plus indoor units

 **Ventilation**
Heat recovery ventilator (HRV)

 **Control Systems**
Smart control systems




VRF V4 Plus Mini Series Heat Pump / Cooling Only

Optimized design for small buildings

- ▶ DC inverter compressor
- ▶ DC fan motor
- ▶ Capacity up to 18kW
- ▶ Connectable indoor units quantity up to 9
- ▶ Precise oil control technology
- ▶ Advanced silence technology
- ▶ Intelligent defrosting technology
- ▶ Simple communication wiring
- ▶ Auto addressing
- ▶ Easy maintenance

Long Piping Capability

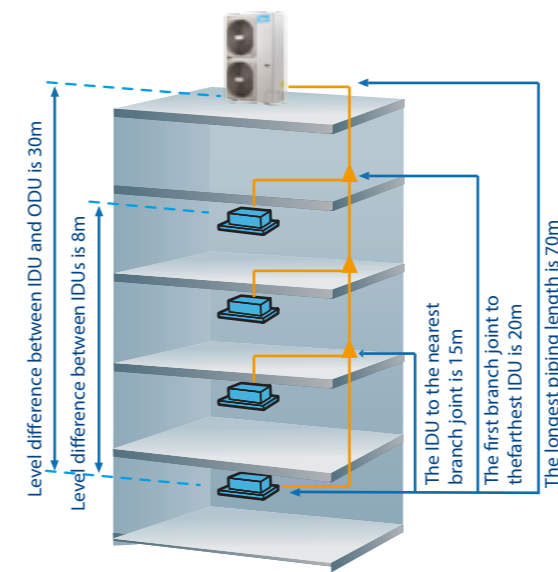


Piping length	Capability	
	7-11kW	12-18kW
Total piping length	100m	100m
Longest length - actual (equivalent)	45m (50m)	60m (70m)
Longest length after first branch	20m	20m
Largest height difference between indoor and outdoor units - ODU up (down)	30m (20m)	30m (20m)
Largest height difference between indoor units	8m	8m


More Convenient Piping Connector – Branch Box



Easier and safer installation thanks to a branch box that simplifies piping work greatly.

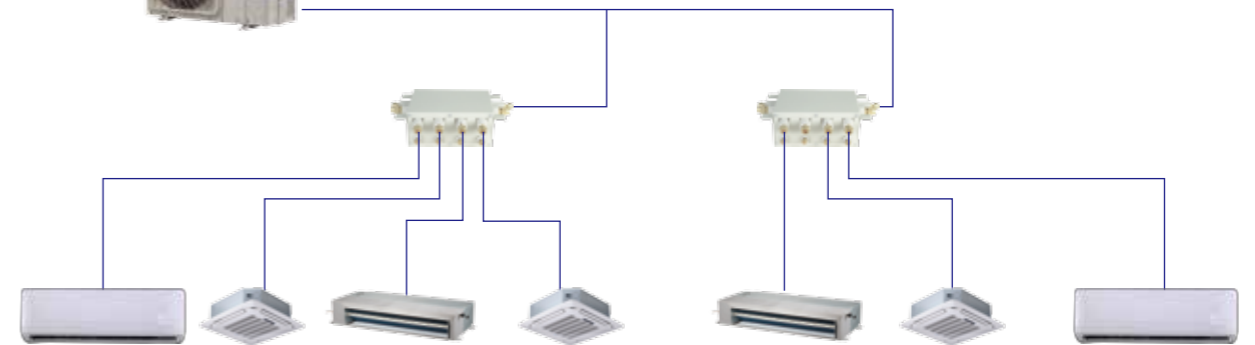

Four-Way Piping Connection



A four-direction space is available for connecting pipes and wiring in various installation sites.

VRF V4 Plus Mini Series - Heat Pump

220~240V, 1N, 50Hz



Model			MDV-V80W/DN1	MDV-V105W/DN1	MDV-V120W/DN1	MDV-V140W/DN1	MDV-V160W/DN1(B)
Power supply		V/N/Hz	220-240/1/50				
Cooling	Capacity	kW	7.2(1.5~8.0)	9.0(2.0~10.0)	12.3	14	15.5
	Power input	kW	1.85	2.3	3.25	3.95	4.52
	EER		3.9	3.92	3.78	3.54	3.43
Heating	Capacity	kW	7.2(1.6~8.4)	9.0(2.1~10.5)	13.2	15.4	17
	Power input	kW	1.79	2.27	3.47	4.16	4.77
	COP		4.02	3.97	3.8	3.7	3.56
Connectable indoor unit	Total capacity	45~130% of outdoor unit capacity					
	Max. quantity		4	5	6	6	7
Compressor	Type	Rotary					
	Quantity	1					
Fan motor	Type	DC					
	Quantity	1			2		
Refrigerant	Type	R410A					
	Factory charging	g	2950	3300	3900	3900	3900
Pipe connections	Liquid pipe	mm	Φ9.53				
	Gas pipe	mm	Φ15.9			Φ19.1	
Air flow rate	m ³ /h	5500			6000		
Sound pressure level	dB(A)	56	57				
Net dimension (W×H×D)	mm	1075×966×396			900×1327×400		
Packing size (W×H×D)	mm	1120×1100×435			1030×1456×435		
Net weight	kg	75.5			95	100	
Gross weight	kg	85.5			106	111	
Operating temperature range	°C	Cooling: -15~43; Heating: -15~27					

Notes:

Capacities are based on the following conditions:

Cooling: Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB; Heating: Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB.

Piping length: Interconnecting piping length is 7.5m, level difference is zero.

Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1m above the floor.

In Mini VRF system, if only one indoor unit is connected, the capacity of indoor unit should be not more than outdoor unit's capacity. If more than one indoor unit are connected, the capacity of each indoor unit should be not more than 8kW for refrigerant uniform distribution.

VRF V4 Plus Mini Series - Heat Pump

380~415V, 3N, 50Hz



Model			MDV-V120W/DRN1	MDV-V140W/DRN1	MDV-V160W/DRN1	MDV-V180W/DRN1
Power supply		V/N/Hz	380-415/3/50			
Cooling	Capacity	kW	12.3	14	15.5	17.5
	Power input	kW	3.25	3.95	4.52	5.3
	EER		3.78	3.54	3.43	3.3
Heating	Capacity	kW	13.2	15.4	17	19
	Power input	kW	3.47	4.16	4.77	5
	COP		3.8	3.7	3.56	3.8
Connectable indoor unit	Total capacity	45~130% of outdoor unit capacity				
	Max. quantity		6	6	7	9
Compressor	Type	Rotary				
	Quantity	1				
Fan motor	Type	DC				
	Quantity	2				
Refrigerant	Type	R410A				
	Factory charging	g	3300	3900	3900	4500
Pipe connections	Liquid pipe	mm	Φ9.53			
	Gas pipe	mm	Φ15.9		Φ19.1	
Air flow rate	m ³ /h	6000			6800	
Sound pressure level	dB(A)	57			59	
Net dimension (W×H×D)	mm	900×1327×400				
Packing size (W×H×D)	mm	1030×1456×435				
Net weight	kg	95	102	107		
Gross weight	kg	106	113	118		
Operating temperature range	°C	Cooling: -15~43; Heating: -15~27				

Notes:

Capacities are based on the following conditions:

Cooling: Indoor temperature 27°C DB/19°C WB; Outdoor temperature 35°C DB/24°C WB; Heating: Indoor temperature 20°C DB/15°C WB; Outdoor temperature 7°C DB/6°C WB.

Piping length: Interconnecting piping length is 7.5m, level difference is zero.

Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1m above the floor.

In Mini VRF system, if only one indoor unit is connected, the capacity of indoor unit should be not more than outdoor unit's capacity. If more than one indoor unit are connected, the capacity of each indoor unit should be not more than 8kW for refrigerant uniform distribution.

VRF V4 Plus Mini Series - Heat Pump

208~230V, 1N, 60Hz



HP			4	4.5	5	6
Model MDV-			V105W/DVN1	V120W/DVN1	V140W/DVN1	V160W/DVN1
Power supply		V/N/Hz	208-230/1/60			
Cooling	Capacity	kW	10.5	12.0	14.0	15.5
		kBtu/h	35.8	40.9	47.8	52.9
	Power input	kW	2.68	3.25	3.95	4.52
	EER		3.92	3.69	3.54	3.43
Heating	Capacity	kW	11.5	13.2	15.4	17.0
		kBtu/h	39.2	45.0	52.5	58.0
	Power input	kW	2.90	3.47	4.16	4.77
	COP		3.97	3.80	3.70	3.56
Connectable indoor unit	Total capacity	45~130% of outdoor unit capacity				
	Max. quantity	5	6	6	7	
Compressor	Type	Rotary				
	Quantity	1	1	1	1	
Fan motor	Type	DC motor				
	Quantity	1	2	2	2	
Refrigerant	Type	R410A				
	Factory charging	kg(lbs.)	3(6.6)	3.3(7.3)	3.9(8.6)	3.9(8.6)
Pipe connections	Liquid pipe	mm(in.)	Φ9.53(Φ3/8)	Φ9.53(Φ3/8)	Φ9.53(Φ3/8)	Φ9.53(Φ3/8)
	Gas pipe	mm(in.)	Φ15.9(Φ5/8)	Φ15.9(Φ5/8)	Φ15.9(Φ5/8)	Φ19.1(Φ3/4)
Air flow rate	m ³ /h	5100	6000	6000	6000	
Sound pressure level	dB(A)	57	57	57	57	
Net dimension (WxHxD)	mm	1075x966x396	900x1327x400	900x1327x400	900x1327x400	
	inch	42-21/64 x38-1/32 x15-19/32	35-7/14x52-1/4x15-3/4	35-7/14x52-1/4x15-3/4	35-7/14x52-1/4x15-3/4	
Packing size (WxHxD)	mm	1120x1100x435	1030x1456x435	1030x1456x435	1030x1456x435	
	inch	44-3/32 x43-5/16 x17-1/8	40-9/16x57-5/16x17-1/8	40-9/16x57-5/16x17-1/8	40-9/16x57-5/16x17-1/8	
Net weight	kg(lbs.)	78(171.9)	95(209.4)	95(209.4)	102(224.9)	
Gross weight	kg(lbs.)	85(187.3)	106(233.7)	106(233.7)	113(249.1)	
Operating temperature range	°C(°F)	Cooling -15~43°C (5~109.4°F) Heating -15~27°C(5~80.6°F)				

Notes:

Capacities are based on the following conditions:

Cooling: Indoor temperature 27°C(80.6°F) DB/19°C(66.2°F) WB; Outdoor temperature 35°C(95°F) DB/24°C(75.2°F) WB.

Heating: Indoor temperature 20°C(68°F) DB/15°C(59°F) WB; Outdoor temperature 7°C(44.6°F) DB/6°C(42.8°F) WB.

Piping length: Interconnecting piping length is 7.5m(24.6ft.), level difference is zero.

Sound values are measured in a semi-anechoic room, at a position of 1m(3.28ft.) in front of the unit and 1m(3.28ft.) above the floor.

In Mini VRF system, if only one indoor unit is connected, the capacity of indoor unit should be not more than outdoor unit's capacity. If more than one indoor unit are connected, the capacity of each indoor unit should be not more than 8kW for refrigerant uniform distribution.

VRF V4 Plus Mini Series - Heat Pump

380~415V, 3N, 60Hz



HP			4.5	5	6
Model MDV-			V120W/DCN1	V140W/DCN1	V160W/DCN1
Power supply		V/N/Hz	380-415/3/60		
Cooling	Capacity	kW	12.0	14.0	15.5
		kBtu/h	40.9	47.8	52.9
	Power input	kW	3.25	3.95	4.52
	EER		3.69	3.54	3.43
Heating	Capacity	kW	13.2	15.4	17.0
		kBtu/h	45.0	52.5	58.0
	Power input	kW	3.47	4.16	4.77
	COP		3.8	3.7	3.56
Connectable indoor unit	Total capacity	45~130% of outdoor unit capacity			
	Max. quantity	6	6	7	
Compressor	Type	Rotary			
	Quantity	1	1	1	
Fan motor	Type	DC motor			
	Quantity	2	2	2	
Refrigerant	Type	R410A			
	Factory charging	kg(lbs.)	3.3(7.3)	3.9(8.6)	3.9(8.6)
Pipe connections	Liquid pipe	mm(in.)	Φ9.53(Φ3/8)	Φ9.53(Φ3/8)	Φ9.53(Φ3/8)
	Gas pipe	mm(in.)	Φ15.9(Φ5/8)	Φ15.9(Φ5/8)	Φ19.1(Φ3/4)
Air flow rate	m ³ /h	6983	6500	6000	
Sound pressure level	dB(A)	57	57	57	
Net dimension (WxHxD)	mm	900x1327x400			
	inch	35-7/14x52-1/4x15-3/4			
Packing size (WxHxD)	mm	1030x1456x435			
	inch	40-9/16x57-5/16x17-1/8			
Net weight	kg(lbs.)	92(203)	95(209.4)	102(224.9)	
Gross weight	kg(lbs.)	106(234)	106(233.7)	113(249.1)	
Operating temperature range	°C(°F)	Cooling -15~43°C (5~109.4°F) Heating -15~27°C(5~80.6°F)			

Notes:

Capacities are based on the following conditions:

Cooling: Indoor temperature 27°C(80.6°F) DB/19°C(66.2°F) WB; Outdoor temperature 35°C(95°F) DB/24°C(75.2°F) WB.

Heating: Indoor temperature 20°C(68°F) DB/15°C(59°F) WB; Outdoor temperature 7°C(44.6°F) DB/6°C(42.8°F) WB.

Piping length: Interconnecting piping length is 7.5m(24.6ft.), level difference is zero.

Sound values are measured in a semi-anechoic room, at a position of 1m(3.28ft.) in front of the unit and 1m(3.28ft.) above the floor.

In Mini VRF system, if only one indoor unit is connected, the capacity of indoor unit should be not more than outdoor unit's capacity. If more than one indoor unit are connected, the capacity of each indoor unit should be not more than 8kW for refrigerant uniform distribution.

VRF V4 Plus Mini Series - Cooling Only

220~240V, 1N, 50Hz / 208~230V, 1N, 60Hz



Model (220~240V, 1N, 50Hz)			MDVC-V72W/DN1	MDVC-V92W/DN1	MDVC-V110W/DN1
Model (208~230V, 1N, 60Hz)			MDVC-V72W/DVN1	MDVC-V92W/DVN1	MDVC-V110W/DVN1
Cooling ¹	Capacity	kW	7.2	9.2	11
	Power input	kW	1.64	2.06	2.75
	EER		4.39	4.47	4
Connected indoor units	Total capacity	45-130% of outdoor unit capacity			
	Maximum quantity		4	5	6
Compressor	Type	DC inverter			
	Quantity	1			
Fan motor	Motor Type	DC			
	Quantity	1			
Refrigerant	Type	R410A			
	Factory charging	kg	1.4	1.4	1.4
Pipe connections	Liquid pipe	mm	Φ9.53	Φ9.53	Φ9.53
	Gas pipe	mm	Φ15.9	Φ15.9	Φ15.9
Airflow rate		m ³ /h	3400	3400	3400
Sound pressure level ²		dB(A)	54	54	54
Net dimensions (WxHxD)		mm	973x862x302	973x862x302	973x862x302
Packed dimensions (WxHxD)		mm	1025x910x410	1025x910x410	1025x910x410
Net weight		kg	58	58	58
Gross weight		kg	63	63	63
Operating temperature range		°C	Cooling: -5 to 48		

Notes:

- Indoor air temperature 27°CDB, 19°CWB; outdoor air temperature 35°CDB; equivalent refrigerant piping length 7.5°Cm with zero level difference.
- Sound pressure level is measured at a position 1m in front of the unit and 1.3m above the floor in a semi-anechoic chamber.
- For a system with more than one IDU, to ensure even distribution of refrigerant, the capacity of each indoor unit should not exceed 8kW.

VRF V4 Plus Mini Series - Cooling Only

220~240V, 1N, 50Hz / 208~230V, 1N, 60Hz



Model (220~240V, 1N, 50Hz)			MDVC-V145W/DN1	MDVC-V170W/DN1
Model (208~230V, 1N, 60Hz)			MDVC-V145W/DVN1	MDVC-V170W/DVN1
Cooling ¹	Capacity	kW	14.5	17
	Power input	kW	3.57	3.99
	EER		4.06	4.26
Connected indoor units	Total capacity	45-130% of outdoor unit capacity		
	Maximum quantity		8	9
Compressor	Type	DC inverter		
	Quantity	1		
Fan motor	Motor Type	DC		
	Quantity	1		
Refrigerant	Type	R410A		
	Factory charging	kg	2.6	2.6
Pipe connections	Liquid pipe	mm	Φ9.53	Φ9.53
	Gas pipe	mm	Φ15.9	Φ15.9
Airflow rate		m ³ /h	5100	5100
Sound pressure level ²		dB(A)	55	55
Net dimensions (WxHxD)		mm	1053x865x523	1053x865x523
Packed dimensions (WxHxD)		mm	1120x890x560	1120x890x560
Net weight		kg	85	85
Gross weight		kg	92	92
Operating temperature range		°C	Cooling: -5 to 48	

Notes:

- Indoor air temperature 27°CDB, 19°CWB; outdoor air temperature 35°CDB; equivalent refrigerant piping length 7.5°Cm with zero level difference.
- Sound pressure level is measured at a position 1m in front of the unit and 1.3m above the floor in a semi-anechoic chamber.
- For a system with more than one IDU, to ensure even distribution of refrigerant, the capacity of each indoor unit should not exceed 8kW.



VRF INDOOR UNITS
1ST & 2ND GENERATION

Wide Application Range

Wide Range of Indoor Units

With 11 types and more than 100 models, Midea VRF indoor units meet varied customer requirements in a wide range of locations including shopping malls, hospitals, office buildings, hotels and airports.

2nd Gen. IDU 1st Gen. IDU



Multiple Appearance Options

For Wall Mounted Units, three interchangeable panels add extra flexibility to a universal body design.

2nd Gen. IDU 1st Gen. IDU



M3 panel




M9 panel



M10 panel

For Four-way Cassette and Compact Four-way Cassette Units, interchangeable 360° airflow and round airflow panels are available.



360° airflow



Round airflow

For Floor Standing Units, the F3B (concealed) unit is designed to be concealed in walls while the F4 (front air intake) and F5 (underside air intake) offer a choice of air intake options.



F3B (concealed)



F4 (front air intake)



F5 (underside air intake)

Comfort And Efficiency

High Efficiency DC Fan Motor

The power consumption of DC fan motor is quite less as compared to the corresponding AC type.

2nd Gen. IDU



Quiet Operation

The low sound operation fan motor and optimized fan blades guarantee the air discharges smoothly and provides a quiet living environment.


2nd Gen. IDU 1st Gen. IDU



Constant Level of Indoor Air Temperature

The DC Inverter fan motor adjusts the air flow based on thermal load instantly providing less temperature fluctuation and an improved living environment.


2nd Gen. IDU

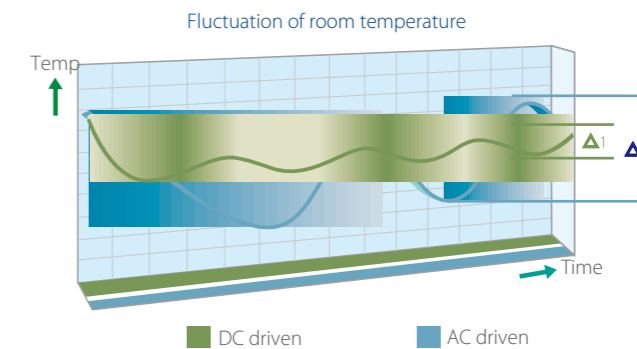

5 Swing Angles for Louver

Thanks to the 5 swing angles for indoor unit louver, the air flow direction can be controlled more precisely.

2nd Gen. IDU

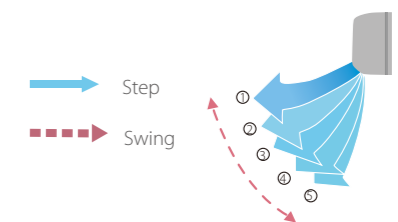


Comfort and Efficiency

Static Pressure 20 Steps Control (Duct Unit)

2nd Gen. IDU


Depending up on the installation requirements, the static pressure for medium static pressure duct can be controlled in 20 steps via wired remote controller and centralised controller for having a more comfortable environment.

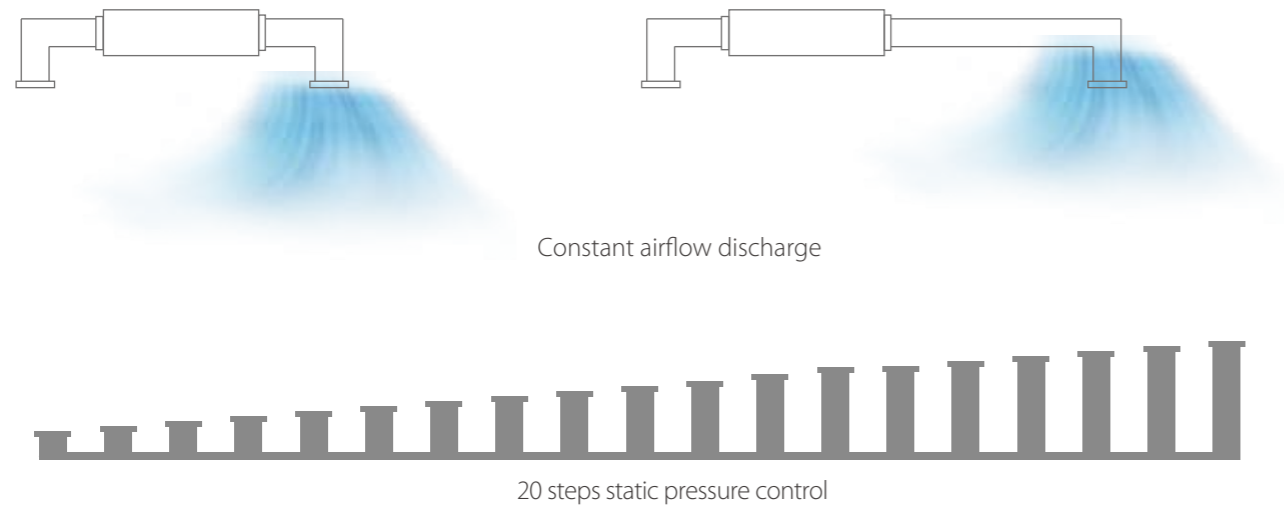

7-Speed Fan Control

2nd Gen. IDU


7 indoor fan speeds provide control flexibility to meet the needs of different indoor conditions.

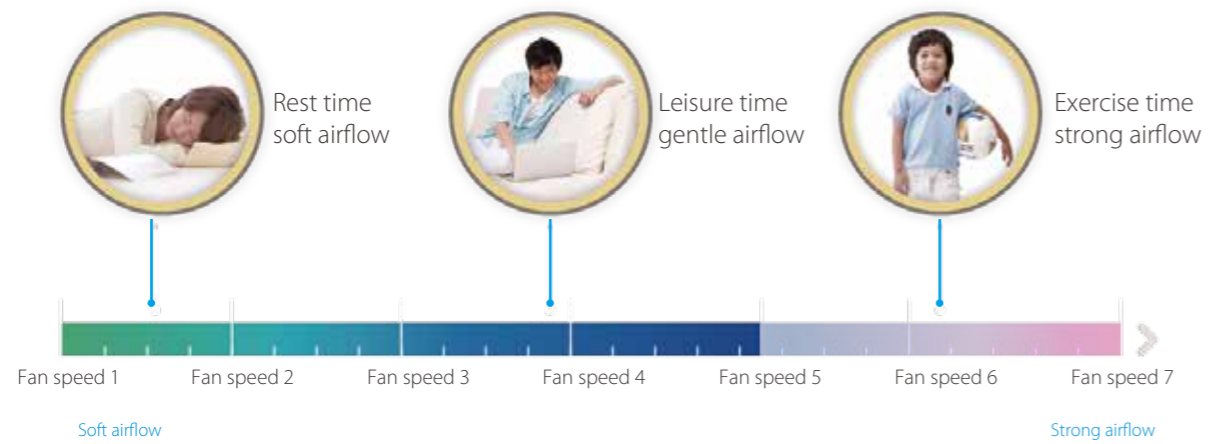

Auto Fan Speed Mode

2nd Gen. IDU

7 fan speeds can be selected automatically according to the temperature different between setting temperature and return air temperature under auto fan speed mode, which controls the fan speed more intelligent and creates a better indoor environment.

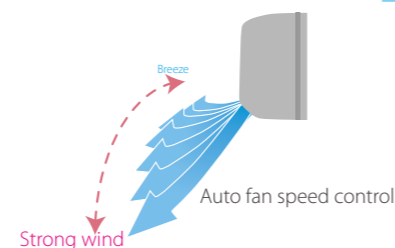


Convenience

High-lift Drain Pump

2nd Gen. IDU

1st Gen. IDU

A drain pump with a 750mm or 500mm pump head is fitted as standard or optional, simplifying installation of the drain piping.

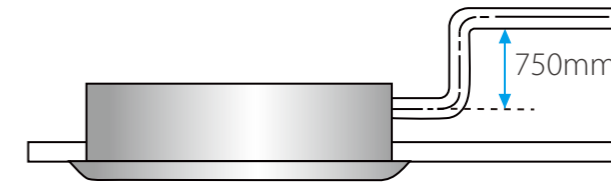


Flexible Installation


2nd Gen. IDU

1st Gen. IDU


For Medium Static Pressure Duct units, to provide the flexibility to adapt to different installation situations, the air inlet may be positioned either on the underside or the rear of the unit.

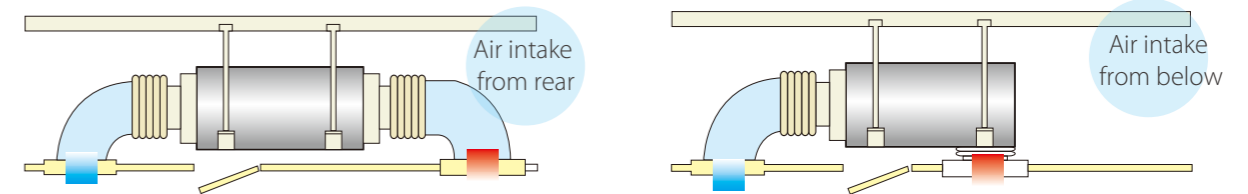

For Wall Mounted Units, the refrigerant outlet direction can be left, right or rear as the installation situation requires. A new fixing plate design speeds installation and provides extra stability.

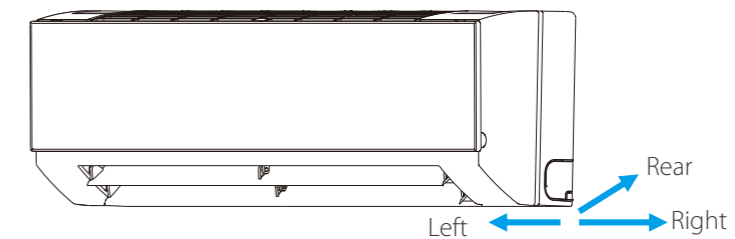

Ceiling / Floor Units can be installed either on the ceiling or the floor, providing flexibility to accommodate a wide range of room designs.

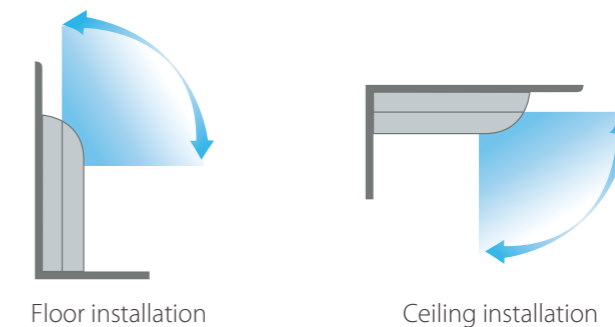

One-way Cassette

- Fresh air intake (45~71 models)
- One-way air discharge, ideal for corner locations
- Drain pump with 750mm pump head fitted as standard



Optional wireless remote controller



RM12D(C)

Optional wired controller



WDC-86E/KD WDC-120G/WK

Model		MI2-18Q1DHN1	MI2-22Q1DHN1	MI2-28Q1DHN1	MI2-36Q1DHN1	
Power supply		1-phase, 220-240V, 50/60Hz				
Cooling ¹	Capacity	kW	1.8	2.2	2.8	3.6
		kBtu/h	6.1	7.5	9.6	12.3
	Power input	W	25	25	30	30
Heating ²	Capacity	kW	2.2	2.6	3.2	4.0
		kBtu/h	7.5	8.9	10.9	13.6
	Power input	W	25	25	30	30
Air flow rate ³	m ³ /h	380/355/330/300/286/263/240		460/440/410/380/355/330/300		
Sound pressure level ⁴	dB(A)	30/28/27/26/25/24/22		37/36/35/34/32/31/30	38/37/35/34/32/31/30	
Main body	Net dimensions ⁵ (WxHxD)	mm 1054x153x425				
	Packed dimensions (WxHxD)	mm 1155x245x490				
	Net/Gross weight	kg 11.8/15.3		12.3/15.8		
Panel	Net dimensions (WxHxD)	mm 1180x25x465				
	Packed dimensions (WxHxD)	mm 1232x107x517				
	Net/Gross weight	kg 3.5/5.2				
Pipe connections	Liquid/Gas pipe	mm Φ 6.35/ Φ 12.7				
	Drain pipe	mm OD Φ 32				


Model		MI2-45Q1DHN1	MI2-56Q1DHN1	MI2-71Q1DHN1	
Power supply		1-phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW	4.5	5.6	7.1
		kBtu/h	15.4	19.1	24.2
	Power input	W	40	48	60
Heating ²	Capacity	kW	5.0	6.3	8.0
		kBtu/h	17.1	21.5	27.3
	Power input	W	40	48	60
Air flow rate ³	m ³ /h	693/662/638/600/556/510/476	792/763/728/688/643/589/549	933/873/815/749/689/637/592	
Sound pressure level ⁴	dB(A)	39/37/36/35/34/32/31	41/39/38/37/36/35/33	43/41/40/39/37/36/35	
Main body	Net dimensions ⁵ (WxHxD)	mm 1275x189x450			
	Packed dimensions (WxHxD)	mm 1370x295x505			
	Net/Gross weight	kg 16.1/20.4	16.4/20.7	17.6/22.4	
Panel	Net dimensions (WxHxD)	mm 1350x25x505			
	Packed dimensions (WxHxD)	mm 1410x95x560			
	Net/Gross weight	kg 4/5.4			
Pipe connections	Liquid/Gas pipe	mm Φ 6.35/ Φ 12.7		Φ 9.53/ Φ 15.9	
	Drain pipe	mm OD Φ 32			

Notes:

1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Each model's 7 airflow rate options are listed in order, from highest to lowest.
4. Each model's 7 sound pressure levels are listed in order from highest to lowest and correspond to the model's 7 airflow rate options (see Note 3). Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
5. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Two-way Cassette

- Fresh air intake
- Two-way air discharge, perfect for limited ceiling space applications
- Drain pump with 750mm pump head fitted as standard



Optional wireless remote controller



RM12D(C)

Optional wired controller



WDC-86E/KD WDC-120G/WK

Model		MI2-22Q2DHN1	MI2-28Q2DHN1	MI2-36Q2DHN1	
Power supply		1-phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW	2.2	2.8	3.6
		kBtu/h	7.5	9.6	12.3
	Power input	W	35	40	40
Heating ²	Capacity	kW	2.6	3.2	4.0
		kBtu/h	8.9	10.9	13.6
	Power input	W	35	40	40
Air flow rate ³	m ³ /h	654/612/571/530/488/449/410	654/612/571/530/488/449/410	725/679/641/591/554/509/458	
Sound pressure level ⁴	dB(A)	33/31/30/29/27/25/24	33/31/30/29/27/25/24	35/33/32/30/29/27/25	
Main body	Net dimensions ⁵ (WxHxD)	mm 1172x299x591			
	Packed dimensions (WxHxD)	mm 1355x400x675			
	Net/Gross weight	kg 33.5/42.0			
Panel	Net dimensions (WxHxD)	mm 1430x53x680			
	Packed dimensions (WxHxD)	mm 1525x130x765			
	Net/Gross weight	kg 10.5/15			
Pipe connections	Liquid/Gas pipe	mm Φ 6.35/ Φ 12.7			
	Drain pipe	mm OD Φ 32			

Model		MI2-45Q2DHN1	MI2-56Q2DHN1	MI2-71Q2DHN1	
Power supply		1-phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW	4.5	5.6	7.1
		kBtu/h	15.4	19.1	24.2
	Power input	W	50	69	98
Heating ²	Capacity	kW	5.0	6.3	8.0
		kBtu/h	17.1	21.5	27.3
	Power input	W	50	69	98
Air flow rate ³	m ³ /h	850/792/731/670/631/592/550	980/925/855/800/755/702/670	1200/1115/1068/1000/921/808/770	
Sound pressure level ⁴	dB(A)	37/36/35/34/32/31/30	39/37/36/35/33/31/30	44/42/41/40/38/36/34	
Main body	Net dimensions ⁵ (WxHxD)	mm 1172x299x591			
	Packed dimensions (WxHxD)	mm 1355x400x675			
	Net/Gross weight	kg 35/43.5			
Panel	Net dimensions (WxHxD)	mm 1430x53x680			
	Packed dimensions (WxHxD)	mm 1525x130x765			
	Net/Gross weight	kg 10.5/15			
Pipe connections	Liquid/Gas pipe	mm Φ 6.35/ Φ 12.7	Φ 9.53/ Φ 15.9		
	Drain pipe	mm OD Φ 32			

Notes:

1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Each model's 7 airflow rate options are listed in order, from highest to lowest.
4. Each model's 7 sound pressure levels are listed in order from highest to lowest and correspond to the model's 7 airflow rate options (see Note 3). Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
5. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Compact Four-way Cassette

- 360° airflow allows for even, wide-range cooling and heating
- Drain pump with 500mm pump head fitted as standard



Optional wireless remote controller



RM12D(C)

Optional wired controller



WDC-86E/KD



WDC-120G/WK

Model			MI2-22Q4CDHN1	MI2-28Q4CDHN1
Power supply			1-phase, 220-240V, 50/60Hz	
Cooling ¹	Capacity	kW	2.2	2.8
		kBtu/h	7.5	9.6
	Power input	W	35	35
Heating ²	Capacity	kW	2.4	3.2
		kBtu/h	8.2	10.9
	Power input	W	35	35
Air flow rate ³		m ³ /h	414/380/345/313/288/268/238	
Sound pressure level ⁴		dB(A)	35/34/33/29/26/23/22	
Main body	Net dimensions ⁵ (WxHxD)	mm	630x260x570	
	Packed dimensions (WxHxD)	mm	700x345x660	
	Net/Gross weight	kg	18/23.5	
Panel	Net dimensions (WxHxD)	mm	647x50x647	
	Packed dimensions (WxHxD)	mm	715x123x715	
	Net/Gross weight	kg	2.5/4.5	
Pipe connections	Liquid/Gas pipe	mm	Φ6.35/Φ12.7	
	Drain pipe	mm	OD Φ25	

Model			MI2-36Q4CDHN1	MI2-45Q4CDHN1
Power supply			1-phase, 220-240V, 50/60Hz	
Cooling ¹	Capacity	kW	3.6	4.5
		kBtu/h	12.3	15.4
	Power input	W	40	50
Heating ²	Capacity	kW	4.0	5.0
		kBtu/h	13.6	17.1
	Power input	W	40	50
Air flow rate ³		m ³ /h	521/485/450/409/380/350/314	
Sound pressure level ⁴		dB(A)	41/38/35/32/30/29/28	
Main body	Net dimensions ⁵ (WxHxD)	mm	630x260x570	
	Packed dimensions (WxHxD)	mm	700x345x660	
	Net/Gross weight	kg	19.2/24.7	
Panel	Net dimensions (WxHxD)	mm	647x50x647	
	Packed dimensions (WxHxD)	mm	715x123x715	
	Net/Gross weight	kg	2.5/4.5	
Pipe connections	Liquid/Gas pipe	mm	Φ6.35/Φ12.7	
	Drain pipe	mm	OD Φ25	

Notes:

1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Each model's 7 airflow rate options are listed in order, from highest to lowest.
4. Each model's 7 sound pressure levels are listed in order from highest to lowest and correspond to the model's 7 airflow rate options (see Note 3). Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
5. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Four-way Cassette

- Fresh air intake
- Round airflow, allows wide-angle, equal distribution of cooling and heating
- Drain pump with 750mm pump head fitted as standard
- Brand-new, elegant panel with four independently controlled louvers



Optional wireless remote controller



RM12D(C)

Optional wired controller



WDC-86E/KD



WDC-120G/WK

Model			MI2-28Q4DHN1	MI2-36Q4DHN1	MI2-45Q4DHN1	MI2-56Q4DHN1	MI2-71Q4DHN1
Power supply			1 phase, 220-240V, 50/60Hz				
Cooling ¹	Capacity	kW	2.8	3.6	4.5	5.6	7.1
		kBtu/h	9.6	12.3	15.4	19.1	24.2
	Power input	W	40	45	50	60	70
Heating ²	Capacity	kW	3.2	4.0	5.0	6.3	8.0
		kBtu/h	10.9	13.6	17.1	21.5	27.3
	Power input	W	40	45	50	60	70
Air flow rate ³		m ³ /h	801/751/711/658/637/611/542	801/751/711/658/637/611/542	893/866/804/744/714/698/635	893/866/804/744/714/698/635	977/937/864/800/778/738/671
Sound pressure level ⁴		dB(A)	32/31/30/28/28/26/23		35/34/31/31/30/28/26		35/35/34/31/30/28/27
Main body	Net dimensions ⁵ (WxHxD)	mm	840x230x840				
	Packed dimensions (WxHxD)	mm	955x260x955				
	Net/Gross weight	kg	21.3/25.8	21.3/25.8	23.2/27.6	23.2/27.6	23.2/27.6
Panel	Net dimensions (WxHxD)	mm	950x54.5x950				
	Packed dimensions (WxHxD)	mm	1035x90x1035				
	Net/Gross weight	kg	5/8				
Pipe connections	Liquid/Gas pipe	mm	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ32				

Model			MI2-80Q4DHN1	MI2-90Q4DHN1	MI2-100Q4DHN1	MI2-112Q4DHN1	MI2-140Q4DHN1
Power supply			1 phase, 220-240V, 50/60Hz				
Cooling ¹	Capacity	kW	8.0	9.0	10.0	11.2	14.0
		kBtu/h	27.3	30.7	34.1	38.2	47.8
	Power input	W	96	100	150	160	170
Heating ²	Capacity	kW	9.0	10.0	11.0	12.5	16.0
		kBtu/h	30.7	34.1	37.5	42.7	54.6
	Power input	W	96	100	150	160	170
Air flow rate ³		m ³ /h	1203/1131/1064/977/912/840/774	1349/1294/1230/1201/1111/1029/970	1700/1600/1440/1250/1200/1150/1100	1700/1600/1440/1250/1200/1150/1100	1800/1650/1500/1300/1250/1200/1150
Sound pressure level ⁴		dB(A)	36/35/34/31/31/29/28	37/35/34/31/31/30/28	43/42/40/38/37/35/34	43/42/40/38/37/35/34	45/44/42/41/40/39/37
Main body	Net dimensions ⁵ (WxHxD)	mm	840x230x840		840x300x840		
	Packed dimensions (WxHxD)	mm	955x260x955		955x330x955		
	Net/Gross weight	kg	23.2/27.6	28.4/33.8		30.7/35.8	
Panel	Net dimensions (WxHxD)	mm	950x54.5x950				
	Packed dimensions (WxHxD)	mm	1035x90x1035				
	Net/Gross weight	kg	5/8				
Pipe connections	Liquid/Gas pipe	mm	Φ9.53/Φ15.9				
	Drain pipe	mm	OD Φ32				

Notes:

1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Each model's 7 airflow rate options are listed in order, from highest to lowest.
4. Each model's 7 sound pressure levels are listed in order from highest to lowest and correspond to the model's 7 airflow rate options (see Note 3). Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
5. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Medium Static Pressure Duct

- Fresh air intake
- 6-step static pressure control on 2.2kW to 7.1kW models and 10-step static pressure control on 8kW to 14kW units (requires latest generation wired controllers)
- Drain pump with 750mm pump head fitted as standard
- Flexible installation for the air inlet may be positioned either on the underside or the rear of the unit



Optional wireless remote controller



RM12D(C)

Optional wired controller



WDC-86E/KD WDC-120G/WK

Model		MI2-22T2DHN1	MI2-28T2DHN1	MI2-36T2DHN1
Power supply		1 phase, 220-240V, 50/60Hz		
Cooling ¹	Capacity	kW 2.2	2.8	3.6
	Power input	kBtu/h 7.5	9.6	12.3
Heating ²	Capacity	kW 2.6	3.2	4.0
	Power input	kBtu/h 8.2	10.9	13.6
Air flow rate ³		m ³ /h 520/480/440/400/360/330/300		
External static pressure		Pa 10 (0~50)		
Sound pressure level ⁴		dB(A) 32/31/29/28/26/25/23		
Unit	Net dimensions ⁵ (WxHxD)	mm 780x210x500		
	Packed dimensions (WxHxD)	mm 870x285x525		
	Net/Gross weight	kg 18/21		
	Liquid/Gas pipe	mm Φ6.35/ Φ12.7		
Pipe connections	Drain pipe	mm OD Φ25		

Model		MI2-45T2DHN1	MI2-56T2DHN1	MI2-71T2DHN1
Power supply		1 phase, 220-240V, 50/60Hz		
Cooling ¹	Capacity	kW 4.5	5.6	7.1
	Power input	kBtu/h 15.4	19.1	24.2
Heating ²	Capacity	kW 5.0	6.3	8.0
	Power input	kBtu/h 17.1	21.5	27.3
Air flow rate ³		m ³ /h 800/740/680/620/540/480/400		
External static pressure		Pa 10 (0~50)		
Sound pressure level ⁴		dB(A) 36/34/32/31/29/27/25		
Unit	Net dimensions ⁵ (WxHxD)	mm 1000x210x500		
	Packed dimensions (WxHxD)	mm 1115x285x525		
	Net/Gross weight	kg 21.5/25		
	Liquid/Gas pipe	mm Φ6.35/ Φ12.7		
Pipe connections	Drain pipe	mm OD Φ25		

Model		MI2-80T2DHN1	MI2-90T2DHN1	MI2-112T2DHN1	MI2-140T2DHN1
Power supply		1 phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW 8.0	9.0	11.2	14.0
	Power input	kBtu/h 27.3	30.7	38.2	47.8
Heating ²	Capacity	kW 9.0	10.0	12.5	15.5
	Power input	kBtu/h 30.7	34.1	42.7	52.9
Air flow rate ³		m ³ /h 1260/1180/1100/1020/940/860/780			
External static pressure		Pa 20 (10~100)			
Sound pressure level ⁴		dB(A) 37/35/34/33/31/29/28			
Unit	Net dimensions ⁵ (WxHxD)	mm 1230x270x775			
	Packed dimensions (WxHxD)	mm 1355x355x795			
	Net/Gross weight	kg 36.5/44.5			
	Liquid/Gas pipe	mm Φ9.53/Φ15.9			
Pipe connections	Drain pipe	mm OD Φ25			

Notes:

- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
 - Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
 - Each model's 7 airflow rate options are listed in order, from highest to lowest.
 - Each model's 7 sound pressure levels are listed in order from highest to lowest and correspond to the model's 7 airflow rate options (see Note 3). Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
 - Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.
- All specifications are measured at standard external static pressure.

High Static Pressure Duct

- External static pressure up to 400Pa facilitates extensive duct and grille network
- 20-step static pressure control on all models (requires latest generation wired controllers)
- A double-skin drainage pan provides double protection for ceilings (models 71 to 160)
- Water pump box is available as a customization option



Optional wireless remote controller



RM12D(C)

Optional wired controller



WDC-86E/KD WDC-120G/WK

Model		MI2-71T1DHN1	MI2-80T1DHN1	MI2-90T1DHN1	MI2-112T1DHN1
Power supply		1-phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW 7.1	8.0	9.0	11.2
	Power input	kBtu/h 24.2	27.3	30.7	38.2
Heating ²	Capacity	kW 8.0	9.0	10.0	12.5
	Power input	kBtu/h 27.3	30.7	34.1	42.7
Air flow rate ³		m ³ /h 1360/1327/1293/1260			
External static pressure		Pa 100 (30~200)			
Sound pressure level ⁴		dB(A) 42/41/40/40/39/39/38			
Unit	Net dimensions ⁵ (WxHxD)	mm 965x423x690			
	Packed dimensions (WxHxD)	mm 1090x440x768			
	Net/Gross weight	kg 41/47			
	Liquid/Gas pipe	mm Φ9.53/Φ15.9			
Pipe connections	Drain pipe	mm OD Φ25			

Model		MI2-140T1DHN1	MI2-160T1DHN1	MI2-200T1DHN1	MI2-250T1DHN1
Power supply		1-phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW 14.0	16.0	20.0	25.0
	Power input	kBtu/h 47.8	54.6	68.2	85.3
Heating ²	Capacity	kW 16.0	17.0	22.5	26.0
	Power input	kBtu/h 54.6	58.0	76.8	88.7
Air flow rate ³		m ³ /h 2240/2133/2027/1920			
External static pressure		Pa 100 (30~200)			
Sound pressure level ⁴		dB(A) 45/44/43/42/41/40/40			
Unit	Net dimensions ⁵ (WxHxD)	mm 1322x423x691			
	Packed dimensions (WxHxD)	mm 1436x450x768			
	Net/Gross weight	kg 68/76			
	Liquid/Gas pipe	mm Φ9.53/Φ15.9			
Pipe connections	Drain pipe	mm OD Φ25			

Model		MI2-280T1DHN1	MI2-400T1DHN1	MI2-450T1DHN1	MI2-560T1DHN1
Power supply		1-phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW 28.0	40.0	45.0	56.0
	Power input	kBtu/h 95.0	136.5	153.6	191.1
Heating ²	Capacity	kW 31.5	45.0	56.0	63.0
	Power input	kBtu/h 107.5	153.6	191.1	215.0
Air flow rate ³		m ³ /h 4330/4230/4130/4030			
External static pressure		Pa 170(20~250)			
Sound pressure level ⁴		dB(A) 51/50/49/49/48/48/47			
Unit	Net dimensions ⁵ (WxHxD)	mm 1454x515x931			
	Packed dimensions (WxHxD)	mm 2010x905x680			
	Net/Gross weight	kg 130/142			
	Liquid/Gas pipe	mm Φ12.7/Φ22.2			
Pipe connections	Drain pipe	mm OD Φ32			

Notes:

- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
 - Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
 - Each model's 7 airflow rate options are listed in order, from highest to lowest.
 - Each model's 7 sound pressure levels are listed in order from highest to lowest and correspond to the model's 7 airflow rate options (see Note 3). Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
 - Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.
- All specifications are measured at standard external static pressure.

Fresh Air Processing Unit

- 100% fresh air processing unit, both fresh air filtration and heating/cooling can be achieved in a single system
- External static pressure up to 400Pa facilitates extensive duct and grille network
- 20-step static pressure control on all models (requires latest generation wired controllers)
- Water pump box is available as a customization option



Optional wireless remote controller



RM12D(C)

Optional wired controller



WDC-86E/KD WDC-120G/WK

Model		MI2-125FADHN1	MI2-140FADHN1	MI2-200FADHN1	
Power supply		1-phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW	12.5	14.0	20.0
		kBtu/h	42.6	47.8	68.2
Heating ²	Power input	W	480	480	850
	Capacity	kW	10.5	12.0	12.8
Heating ²		kBtu/h	36.0	41.0	43.7
	Power input	W	480	480	850
Air flow rate ³	m ³ /h	2000/1917/1833/1750/1667/1583/1500		3000/2833/2667/2500/2333/2167/2000	
External static pressure	Pa	150(100~250)		200(100~400)	
Sound pressure level ⁴	dB(A)	48/47/46/45/44/43/42		50/49/48/47/46/44/43	
unit	Net dimensions ⁵ (WxHxD)	mm	1322x423x691		1454x515x931
	Packed dimensions (WxHxD)	mm	1436x450x768		1509x550x990
	Net/Gross weight	kg	68/76		130/142
Pipe connections	Liquid/Gas pipe	mm	Φ9.53/Φ15.9		Φ12.7/Φ22.2
	Drain pipe	mm	OD Φ25		OD Φ32

Model		MI2-250FADHN1	MI2-280FADHN1	MI2-450FADHN1	MI2-560FADHN1	
Power supply		1-phase, 220-240V, 50/60Hz				
Cooling ¹	Capacity	kW	25.0	28.0	45.0	56.0
		kBtu/h	85.3	95.5	153.6	191.1
Heating ²	Power input	W	850	850	1080	2272
	Capacity	kW	16.0	18.0	28.0	39.0
Heating ²		kBtu/h	54.6	61.4	95.6	133.1
	Power input	W	850	850	1080	2272
Air flow rate ³	m ³ /h	3000/2833/2667/2500/2333/2167/2000		4200/3967/3733/3500/3267/3033/2800	6000/5665/5330/5000/4665/4330/4000	
External static pressure	Pa	200(100~400)		300(100~400)	300(100~400)	
Sound pressure level ⁴	dB(A)	50/49/48/47/46/44/43		58/56/55/53/51/49/48	59/57/56/55/53/51/50	
unit	Net dimensions ⁵ (WxHxD)	mm	1454x515x931		2010x905x680	2010x905x680
	Packed dimensions (WxHxD)	mm	1509x550x990		2095x929x689	2095x929x689
	Net/Gross weight	kg	130/142		195/215	218/248
Pipe connections	Liquid/Gas pipe	mm	Φ12.7/Φ22.2		Φ15.9/Φ28.6	Φ15.9/Φ28.6
	Drain pipe	mm	OD Φ32			

Notes:

1. Outdoor temperature 33°C DB, 28°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Outdoor temperature 0°C DB, -2.9°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Each model's 7 airflow rate options are listed in order, from highest to lowest.
4. Each model's 7 sound pressure levels are listed in order from highest to lowest and correspond to the model's 7 airflow rate options (see Note 3). Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
5. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments. All specifications are measured at standard external static pressure.

The Fresh Air Processing Unit can be used either independently or in conjunction with other types of indoor unit. If used independently, the total capacity of the Fresh Air Processing Units must be between 50% and 100% of that of the outdoor units. If used in conjunction with other types of indoor unit, the total capacity of the indoor units and Fresh Air Processing Units must be between 50% and 100% of that of the outdoor units and the total capacity of the Fresh Air Processing Units must not exceed 30% of that of the outdoor units.

Wall Mounted Unit

- Three interchangeable panels allow units to blend easily with any interior decoration, perfect for rooms with no false ceilings or free floor space
- Refrigerant outlet direction can be left, right or rear as the installation situation requires



Optional wireless remote controller



RM12D(C)

Optional wired controller



WDC-86E/KD WDC-120G/WK

Model		MI2-22GDHN1	MI2-28GDHN1	
Power supply		1 phase, 220-240V, 50/60Hz		
Cooling ¹	Capacity	kW	2.2	2.8
		kBtu/h	7.5	9.6
Heating ²	Power input	W	28	28
	Capacity	kW	2.4	3.2
Heating ²		kBtu/h	8.2	10.9
	Power input	W	28	28
Air flow rate ³	m ³ /h	422/411/402/393/380/368/356		417/402/386/370/353/338/316
Sound pressure level ⁴	dB(A)	31/30/30/30/29/29/29		31/30/30/30/29/29/29
Unit	Net dimensions ⁵ (WxHxD)	mm	835x280x203	
	Packed dimensions (WxHxD)	mm	935x385x320	
	Net/Gross weight	kg	8.4/12.1	
Pipe connections	Liquid/Gas pipe	mm	Φ6.35/Φ12.7	
	Drain pipe	mm	OD Φ16	

Model		MI2-36GDHN1	MI2-45GDHN1	MI2-56GDHN1	
Power supply		1 phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW	3.6	4.5	5.6
		kBtu/h	12.3	15.4	19.1
Heating ²	Power input	W	30	40	45
	Capacity	kW	4.0	5.0	6.3
Heating ²		kBtu/h	13.6	17.1	21.5
	Power input	W	30	40	45
Air flow rate ³	m ³ /h	656/628/591/573/544/515/488		594/563/535/507/478/450/424	747/713/685/648/613/578/547
Sound pressure level ⁴	dB(A)	33/32/32/31/31/30/30		35/34/33/33/32/31/31	38/37/36/36/35/34/34
Unit	Net dimensions ⁵ (WxHxD)	mm	990x315x223		
	Packed dimensions (WxHxD)	mm	1085x420x335		
	Net/Gross weight	kg	11.4/15.5		12.8/16.9
Pipe connections	Liquid/Gas pipe	mm	Φ6.35/Φ12.7		Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ16		

Model		MI2-71GDHN1	MI2-80GDHN1	MI2-90GDHN1	
Power supply		1 phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW	7.1	8.0	9.0
		kBtu/h	24.2	27.3	30.7
Heating ²	Power input	W	55	55	82
	Capacity	kW	8.0	9.0	10.0
Heating ²		kBtu/h	27.3	30.7	34.1
	Power input	W	55	55	82
Air flow rate ³	m ³ /h	1195/1130/1065/1005/940/875/809		1195/1130/1065/1005/940/875/809	1421/1300/1125/1067/1005/934/867
Sound pressure level ⁴	dB(A)	44/43/42/39/38/37/36		44/43/42/39/38/37/36	48/46/45/43/41/40/38
Unit	Net dimensions ⁵ (WxHxD)	mm	1194x343x262		
	Packed dimensions (WxHxD)	mm	1290x375x460		
	Net/Gross weight	kg	17.0/22.4		
Pipe connections	Liquid/Gas pipe	mm	Φ9.53/Φ15.9		
	Drain pipe	mm	OD Φ16		

Notes:

1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Each model's 7 airflow rate options are listed in order, from highest to lowest.
4. Each model's 7 sound pressure levels are listed in order from highest to lowest and correspond to the model's 7 airflow rate options (see Note 3). Sound pressure level is measured 1m in front and 1m below the unit in a semi-anechoic chamber.
5. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Ceiling / Floor

- Can be installed either on the ceiling or floor



Model			MI2-36DLH1	MI2-45DLH1	MI2-56DLH1	MI2-71DLH1
Power supply			1 phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW	3.6	4.5	5.6	7.1
		kBtu/h	12.3	15.4	19.1	24.2
	Power input	W	49	115	115	115
Heating ²	Capacity	kW	4.0	5.0	6.3	8.0
		kBtu/h	13.6	17.1	21.5	27.3
	Power input	W	49	115	115	115
Air flow rate ³		m ³ /h	550/525/500/480/460/440/420		800/750/700/650/600/550/500	
Sound pressure level ⁴		dB(A)	36/35/34/33/32/31/30		43/42/41/41/39/38/38	
Unit	Net dimensions ⁵ (WxHxD)	mm	990×660×203			
	Packed dimensions (WxHxD)	mm	1089×744×296			
	Net/Gross weight	kg	27/33	28/34		
Pipe connections	Liquid/Gas pipe	mm	Φ6.35/Φ12.7		Φ9.53/Φ15.9	
	Drain pipe	mm	OD Φ16			

Model			MI2-80DLH1	MI2-90DLH1	MI2-112DLH1	MI2-140DLH1
Power supply			1 phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW	8.0	9.0	11.2	14.0
		kBtu/h	27.2	30.7	38.2	47.8
	Power input	W	130	130	180	180
Heating ²	Capacity	kW	9.0	10.0	12.5	15.0
		kBtu/h	30.7	34.1	42.7	51.2
	Power input	W	130	130	180	180
Air flow rate ³		m ³ /h	1280/1245/1210/1170/1130/1085/1050		1890/1830/1765/1700/1660/1620/1580	
Sound pressure level ⁴		dB(A)	45/44/43/43/42/41/40		47/46/45/45/44/43/42	
Unit	Net dimensions ⁵ (WxHxD)	mm	1280×660×203		1670×680×244	
	Packed dimensions (WxHxD)	mm	1379×744×296		1915×760×330	
	Net/Gross weight	kg	35/41		48/58	
Pipe connections	Liquid/Gas pipe	mm	Φ9.53/Φ15.9			
	Drain pipe	mm	OD Φ16			

Notes:

1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Each model's 7 airflow rate options are listed in order, from highest to lowest.
4. Each model's 7 sound pressure levels are listed in order from highest to lowest and correspond to the model's 7 airflow rate options (see Note 3).
Floor standing: Sound pressure level is measured 1m in front and 1m above the floor in a semi-anechoic chamber.
Ceiling mounted: Sound pressure level is measured 1m in front and 1m below the unit in a semi-anechoic chamber.
5. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Floor Standing Unit (Concealed)

- Designed to be concealed in walls with only the suction and discharge grills visible



Model			MI2-22F3DHN1	MI2-28F3DHN1
Power supply			1 phase, 220-240V, 50/60Hz	
Cooling ¹	Capacity	kW	2.2	2.8
		kBtu/h	7.5	9.6
	Power input	W	40	45
Heating ²	Capacity	kW	2.4	3.2
		kBtu/h	8.2	10.9
	Power input	W	40	45
Air flow rate ³		m ³ /h	530/504/478/456/439/418/400	
Sound pressure level ⁴		dB(A)	36/35/34/33/31/30/29	
Unit	Net dimensions ⁵ (WxHxD)	mm	840×545×212	
	Packed dimensions (WxHxD)	mm	939×639×305	
	Net/Gross weight	kg	21/25.5	
Pipe connections	Liquid/Gas pipe	mm	Φ6.35/Φ12.7	
	Drain pipe	mm	Φ16	

Model			MI2-36F3DHN1	MI2-45F3DHN1
Power supply			1 phase, 220-240V, 50/60Hz	
Cooling ¹	Capacity	kW	3.6	4.5
		kBtu/h	12.3	15.4
	Power input	W	55	60
Heating ²	Capacity	kW	4.0	5.0
		kBtu/h	13.6	17.1
	Power input	W	55	60
Air flow rate ³		m ³ /h	624/591/557/522/473/420/375	
Sound pressure level ⁴		dB(A)	37/36/35/34/32/31/30	
Unit	Net dimensions ⁵ (WxHxD)	mm	1040×545×212	
	Packed dimensions (WxHxD)	mm	1139×639×305	
	Net/Gross weight	kg	25.5/30.5	
Pipe connections	Liquid/Gas pipe	mm	Φ6.35/Φ12.7	
	Drain pipe	mm	Φ16	

Model			MI2-56F3DHN1	MI2-71F3DHN1	MI2-80F3DHN1
Power supply			1 phase, 220-240V, 50/60Hz		
Cooling ¹	Capacity	kW	5.6	7.1	8.0
		kBtu/h	19.1	24.2	27.3
	Power input	W	88	110	130
Heating ²	Capacity	kW	6.3	8.0	9.0
		kBtu/h	21.5	27.3	30.7
	Power input	W	88	110	130
Air flow rate ³		m ³ /h	1150/1094/1028/970/925/886/830	1380/1290/1205/1100/1033/955/870	1380/1290/1205/1100/1033/955/870
Sound pressure level ⁴		dB(A)	41/39/37/35/33/32/31	44/42/40/39/37/35/33	44/42/40/39/37/35/33
Unit	Net dimensions ⁵ (WxHxD)	mm	1340×545×212		
	Packed dimensions (WxHxD)	mm	1425×639×345		
	Net/Gross weight	kg	30.5/35.5		32/37
Pipe connections	Liquid/Gas pipe	mm	Φ9.53/Φ15.9		
	Drain pipe	mm	Φ16		

Notes:

1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Each model's 7 airflow rate options are listed in order, from highest to lowest.
4. Each model's 7 sound pressure levels are listed in order from highest to lowest and correspond to the model's 7 airflow rate options (see Note 3).
Sound pressure level is measured 1m in front and 1m above the floor in a semi-anechoic chamber.
5. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.
All specifications are measured at 10Pa external static pressure.

Floor Standing Unit (Exposed)

- The F4 (front air intake) and F5 (underside air intake) offer a choice of air intake options



Model		MI2-22F4DHN1 MI2-22F5DHN1		MI2-28F4DHN1 MI2-28F5DHN1	
Power supply		1 phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW	2.2	kW	2.8
		kBtu/h	7.5	kBtu/h	9.6
Heating ²	Capacity	kW	4.0	kW	4.5
		kBtu/h	13.6	kBtu/h	17.1
Air flow rate ³		m ³ /h	530/504/478/456/439/418/400	m ³ /h	569/540/515/485/462/443/421
Sound pressure level ⁴		dB(A)	36/35/34/33/31/30/29	dB(A)	36/35/34/33/31/30/29
Unit	Net dimensions ⁵ (WxHxD)	mm (F4)	1000x596x225	mm (F4)	1000x596x225
		mm (F5)	1000x677x220	mm (F5)	1000x677x220
	Packed dimensions (WxHxD)	mm (F4)	1089x683x312	mm (F4)	1089x683x312
		mm (F5)	1182x683x312	mm (F5)	1182x683x312
Net/Gross weight	kg (F4)	28/33	kg (F4)	28/33	
	kg (F5)	28/35	kg (F5)	28/35	
Pipe connections	Liquid/Gas pipe	mm	Φ6.35/Φ12.7	mm	Φ6.35/Φ12.7
	Drain pipe	mm	Φ16	mm	Φ16

Model		MI2-36F4DHN1 MI2-36F5DHN1		MI2-45F4DHN1 MI2-45F5DHN1	
Power supply		1 phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW	3.6	kW	4.5
		kBtu/h	12.3	kBtu/h	15.4
Heating ²	Capacity	kW	5.5	kW	6.0
		kBtu/h	18.8	kBtu/h	21.1
Air flow rate ³		m ³ /h	624/591/557/522/473/420/375	m ³ /h	660/625/583/542/501/475/440
Sound pressure level ⁴		dB(A)	37/36/35/34/32/31/30	dB(A)	37/36/35/34/32/31/30
Unit	Net dimensions ⁵ (WxHxD)	mm (F4)	1200x596x225	mm (F4)	1200x596x225
		mm (F5)	1200x677x220	mm (F5)	1200x677x220
	Packed dimensions (WxHxD)	mm (F4)	1289x683x312	mm (F4)	1289x683x312
		mm (F5)	1382x683x312	mm (F5)	1382x683x312
Net/Gross weight	kg (F4)	33/38.6	kg (F4)	33/38.6	
	kg (F5)	33/40.7	kg (F5)	33/40.7	
Pipe connections	Liquid/Gas pipe	mm	Φ6.35/Φ12.7	mm	Φ6.35/Φ12.7
	Drain pipe	mm	Φ16	mm	Φ16


Model		MI2-56F4DHN1 MI2-56F5DHN1		MI2-71F4DHN1 MI2-71F5DHN1		MI2-80F4DHN1 MI2-80F5DHN1	
Power supply		1 phase, 220-240V, 50/60Hz					
Cooling ¹	Capacity	kW	5.6	kW	7.1	kW	8.0
		kBtu/h	19.1	kBtu/h	24.2	kBtu/h	27.3
Heating ²	Capacity	kW	8.8	kW	11.0	kW	13.0
		kBtu/h	30.5	kBtu/h	37.3	kBtu/h	44.3
Air flow rate ³		m ³ /h	1150/1094/1028/970/925/886/830	m ³ /h	1380/1290/1205/1100/1033/955/870	m ³ /h	1380/1290/1205/1100/1033/955/870
Sound pressure level ⁴		dB(A)	41/39/37/35/33/32/31	dB(A)	44/42/40/39/37/35/33	dB(A)	44/42/40/39/37/35/33
Unit	Net dimensions ⁵ (WxHxD)	mm (F4)	1500x596x225	mm (F4)	1500x596x225	mm (F4)	1500x596x225
		mm (F5)	1500x677x220	mm (F5)	1500x677x220	mm (F5)	1500x677x220
	Packed dimensions (WxHxD)	mm (F4)	1589x683x312	mm (F4)	1589x683x312	mm (F4)	1589x683x312
		mm (F5)	1682x683x312	mm (F5)	1682x683x312	mm (F5)	1682x683x312
Net/Gross weight	kg (F4)	40/46	kg (F4)	41.5/47.5	kg (F4)	41.5/47.5	
	kg (F5)	40.4/48.6	kg (F5)	41.5/49.5	kg (F5)	41.5/49.5	
Pipe connections	Liquid/Gas pipe	mm	Φ9.53/Φ15.9	mm	Φ9.53/Φ15.9	mm	Φ9.53/Φ15.9
	Drain pipe	mm	Φ16	mm	Φ16	mm	Φ16

Notes:

- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
- Each model's 7 airflow rate options are listed in order, from highest to lowest.
- Each model's 7 sound pressure levels are listed in order from highest to lowest and correspond to the model's 7 airflow rate options (see Note 3).
Sound pressure level is measured 1m in front and 1m above the floor in a semi-anechoic chamber.
- Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Console

- Combination of four air inlets and two air outlets ensures that cooling and heating are distributed in all directions.

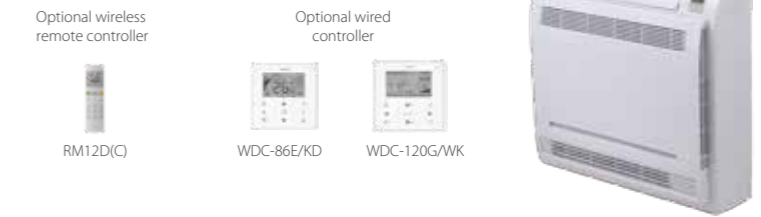

Model		MI2-22ZDHN1		MI2-28ZDHN1	
Power supply		1 phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW	2.2	kW	2.8
		kBtu/h	7.5	kBtu/h	9.6
Heating ²	Capacity	kW	4.0	kW	4.5
		kBtu/h	13.6	kBtu/h	17.1
Air flow rate ³		m ³ /h	430/401/374/345/302/268/229	m ³ /h	510/482/456/430/355/286/229
Sound pressure level ⁴		dB(A)	38/36/34/32/28/27/26	dB(A)	39/37/35/33/31/29/27
Unit	Net dimensions ⁵ (WxHxD)	mm	700x600x210		
	Packed dimensions (WxHxD)	mm	810x710x305		
	Net/Gross weight	kg	14/19	15/20	
Pipe connections	Liquid/Gas pipe	mm	Φ6.35/Φ12.7		
	Drain pipe	mm	OD Φ16		

Model		MI2-36ZDHN1		MI2-45ZDHN1	
Power supply		1 phase, 220-240V, 50/60Hz			
Cooling ¹	Capacity	kW	3.6	kW	4.5
		kBtu/h	12.3	kBtu/h	15.4
Heating ²	Capacity	kW	5.5	kW	6.0
		kBtu/h	18.8	kBtu/h	21.1
Air flow rate ³		m ³ /h	624/591/557/522/473/420/375	m ³ /h	660/614/561/512/478/436/400
Sound pressure level ⁴		dB(A)	39/37/35/33/31/29/27	dB(A)	42/41/40/39/37/36/36
Unit	Net dimensions ⁵ (WxHxD)	mm	700x600x210		
	Packed dimensions (WxHxD)	mm	810x710x305		
	Net/Gross weight	kg	15/20		
Pipe connections	Liquid/Gas pipe	mm	Φ6.35/Φ12.7		
	Drain pipe	mm	OD Φ16		

Notes:

- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
- Each model's 7 airflow rate options are listed in order, from highest to lowest.
- Each model's 7 sound pressure levels are listed in order from highest to lowest and correspond to the model's 7 airflow rate options (see Note 3).
Sound pressure level is measured 1m in front and 1m above the floor in a semi-anechoic chamber.
- Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

One-way Cassette

- Fresh air intake (45~71 models)
- One-way air discharge, ideal for corner locations
- Drain pump with 750mm pump head fitted as standard

Standard wireless remote controller



RM05



50Hz specification

Model			MDV-D18Q1/N1-D	MDV-D22Q1/N1-D	MDV-D28Q1/N1-D	MDV-D36Q1/N1-D	MDV-D45Q1/N1-D	MDV-D56Q1/N1-D	MDV-D71Q1/N1-D
Power supply			1-phase, 220-240V, 50Hz						
Capacity	Cooling	kW	1.8	2.2	2.8	3.6	4.5	5.6	7.1
	Heating	kW	2.2	2.6	3.2	4.0	5.0	6.3	8.0
Power input	Cooling	W	41	41	41	41	48	48	60
	Heating	W	41	41	41	41	48	48	60
Airflow rate(H/M/L)	m ³ /h		523/404/275	523/404/275	573/456/315	573/456/315	693/600/476	792/688/549	933/749/592
Sound pressure level(H/M/L)	dB(A)		37/34/30	38/34/30	39/37/34	40/38/34	41/39/35	42/40/36	44/41/37
Main body	Net dim.(WxHxD)	mm	1054x153x425	1054x153x425	1054x153x425	1054x153x425	1275x189x450	1275x189x450	1275x189x450
	Packing dim.(WxHxD)	mm	1155x245x490	1155x245x490	1155x245x490	1155x245x490	1370x295x505	1370x295x505	1370x295x505
	Net/gross weight	kg	12.5/16	12.5/16	13/16.5	13/16.5	18.5/22.8	18.8/23.1	19.5/23.8
Panel	Net dim.(WxHxD)	mm	1180x25x465	1180x25x465	1180x25x465	1180x25x465	1350x25x505	1350x25x505	1350x25x505
	Packing dim.(WxHxD)	mm	1232x107x517	1232x107x517	1232x107x517	1232x107x517	1410x95x560	1410x95x560	1410x95x560
	Net/gross weight	kg	3.5/5.2	3.5/5.2	3.5/5.2	3.5/5.2	4/5.4	4/5.4	4/5.4
Piping connections	Liquid/gas pipe	mm	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ25	OD Φ25	OD Φ25	OD Φ25	OD Φ25	OD Φ25	OD Φ25
Standard controller			Wireless remote controller						

60Hz specification

Model			MDV-D18Q1/VN1-D	MDV-D22Q1/VN1-D	MDV-D28Q1/VN1-D	MDV-D36Q1/VN1-D	MDV-D45Q1/VN1-D	MDV-D56Q1/VN1-D	MDV-D71Q1/VN1-D	
Power supply			1-phase, 208-230V, 60Hz							
Cooling capacity	kW		1.8	2.2	2.8	3.6	4.5	5.6	7.1	
	Btu/h		6100	7500	9600	12300	15400	19100	24200	
Heating capacity	kW		2.2	2.6	3.2	4.0	5.0	6.3	8.0	
	Btu/h		7500	8900	10900	13600	17100	21500	27300	
Power input	Cooling	W	41	41	41	41	54	60	75	
	Heating	W	41	41	41	41	54	60	75	
Airflow rate(H/M/L)	m ³ /h		523/404/275	523/404/275	573/456/315	573/456/315	693/600/476	792/688/549	933/749/592	
	CFM		308/238/162	308/238/162	337/268/185	337/268/185	408/353/280	466/405/323	549/441/349	
Sound pressure level(H/M/L)	dB(A)		37/34/30	38/34/30	39/37/34	40/38/34	41/39/35	42/40/36	44/41/37	
Main body	Net dim.(WxHxD)	mm(in.)	1054x153x425(41-1/2x6-1/32x16-47/64)				1275x189x450(50-13/64x7-7/16x17-23/32)			
	Packing dim.(WxHxD)	mm(in.)	1155x245x490(45-15/32x9-41/64x19-19/64)				1370x295x505(53-15/16x11-39/64x19-7/8)			
	Net/gross weight	kg(lbs.)	12.5/16(27.8/35.3)		13/16.5(28.8/36.4)		18.5/22.8(40.8/50.3)		18.8/23.1(41.4/50.9)	
Panel	Net dim.(WxHxD)	mm(in.)	1180x25x465(46-29/64x63/64x18-5/16)				1350x25x505(53-5/32x63/64x19-7/8)			
	Packing dim.(WxHxD)	mm(in.)	1232x107x517(48-1/2x4-7/32x20-23/64)				1410x95x560(55-33/64x3-47/64x22-3/64)			
	Net/gross weight	kg(lbs.)	3.5/5.2(7.7/11.5)				4/5.4(8.8/11.9)			
Piping connections	Liquid/gas pipe	mm(in.)	Φ6.35/Φ12.7(Φ1/4/Φ1/2)				Φ9.53/Φ15.9(Φ3/8/Φ5/8)			
	Drain pipe	mm(in.)	Φ25(OD 63/64)							
Standard controller			Wireless remote controller							

Notes:

1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Two-way Cassette

- Fresh air intake
- Two-way air discharge, perfect for limited ceiling space applications
- Drain pump with 750mm pump head fitted as standard

Standard wireless remote controller



RM05



50Hz specification

Model			MDV-D22Q2/N1	MDV-D28Q2/N1	MDV-D36Q2/N1	MDV-D45Q2/N1	MDV-D56Q2/N1	MDV-D71Q2/N1
Power supply			1-phase, 220-240V, 50Hz					
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	7.1
	Heating	kW	2.6	3.2	4.0	5.0	6.3	8.0
Power input	Cooling	W	57	57	60	92	108	154
	Heating	W	57	57	60	92	108	154
Airflow rate(H/M/L)	m ³ /h		654/530/410	725/591/458	725/591/458	850/670/550	980/800/670	1200/1000/770
Sound pressure level(H/M/L)	dB(A)		33/29/24	36/32/29	36/32/29	39/35/30	39/35/30	44/40/34
Main body	Net dim.(WxHxD)	mm	1172x299x591	1172x299x591	1172x299x591	1172x299x591	1172x299x591	1172x299x591
	Packing dim.(WxHxD)	mm	1355x400x675	1355x400x675	1355x400x675	1355x400x675	1355x400x675	1355x400x675
	Net/gross weight	kg	34/42.5	34/42.5	34/42.5	36/44.5	36/44.5	36/44.5
Panel	Net dim.(WxHxD)	mm	1430x53x680	1430x53x680	1430x53x680	1430x53x680	1430x53x680	1430x53x680
	Packing dim.(WxHxD)	mm	1525x130x765	1525x130x765	1525x130x765	1525x130x765	1525x130x765	1525x130x765
	Net/gross weight	kg	10.5/15	10.5/15	10.5/15	10.5/15	10.5/15	10.5/15
Piping connections	Liquid/gas pipe	mm	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32
Standard controller			Wireless remote controller					

60Hz specification

Model			MDV-D22Q2/VN1	MDV-D28Q2/VN1	MDV-D36Q2/VN1	MDV-D45Q2/VN1	MDV-D56Q2/VN1	MDV-D71Q2/VN1
Power supply			1-phase, 208-230V, 60Hz					
Cooling capacity	kW		2.2	2.8	3.6	4.5	5.6	7.1
	Btu/h		7500	9600	12300	15400	19100	24200
Heating capacity	kW		2.6	3.2	4.0	5.0	6.3	8.0
	Btu/h		8900	10900	13600	17100	21500	27300
Power input	Cooling	W	78	78	83	115	133	205
	Heating	W	78	78	83	115	133	205
Airflow rate(H/M/L)	m ³ /h		674/509/381	740/577/435	740/577/435	878/689/561	941/776/654	1236/1110/864
	CFM		397/300/224	436/340/256	436/340/256	517/406/330	554/457/385	727/653/509
Sound pressure level(H/M/L)	dB(A)		33/29/24	36/32/29	36/32/29	39/35/30	39/35/30	44/40/34
Main body	Net dim.(WxHxD)	mm(in.)	1172x299x591(46-9/32x11-49/64x23-17/64)					
	Packing dim.(WxHxD)	mm(in.)	1355x400x675(53-11/32x15-3/4x26-37/64)					
	Net/gross weight	kg(lbs.)	34/42.5(75/94)			36.5/45(80.5/99)		
Panel	Net dim.(WxHxD)	mm(in.)	1430x53x680(56-19/64x2-3/32x26-49/64)					
	Packing dim.(WxHxD)	mm(in.)	1525x130x765(60-3/64x5-1/8x30-1/8)					
	Net/gross weight	kg(lbs.)	10.5/15(23/33)					
Piping connections	Liquid/gas pipe	mm(in.)	Φ6.35/Φ12.7(Φ1/4/Φ1/2)				Φ9.53/Φ15.9(Φ3/8/Φ5/8)	
	Drain pipe	mm(in.)	Φ32(OD 1-17/64)					
Standard controller			Wireless remote controller					

Notes:

1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Compact Four-way Cassette

- 360° airflow allows for even, wide-range cooling and heating
- Drain pump with 500mm pump head fitted as standard

Standard wireless remote controller



50Hz specification

Model			MDV-D15Q4/N1-A3	MDV-D22Q4/N1-A3	MDV-D28Q4/N1-A3
Power supply			1-phase,220-240V,50Hz		
Capacity	Cooling	kW	1.5	2.2	2.8
	Heating	kW	1.7	2.4	3.2
Power input	Cooling	W	36	50	50
	Heating	W	36	50	50
Airflow rate(H/M/L)		m ³ /h	435/283/208	414/313/238	414/313/238
Sound pressure level(H/M/L)		dB(A)	35/33/23	36/33/23	36/33/23
Main body	Net dim.(WxHxD)	mm	570x260x570	570x260x570	570x260x570
	Packing dim.(WxHxD)	mm	675x285x675	675x285x675	675x285x675
	Net/gross weight	kg	16/19.5	16/20	16/20
Panel	Net dim.(WxHxD)	mm	647x50x647	647x50x647	647x50x647
	Packing dim.(WxHxD)	mm	715x123x715	715x123x715	715x123x715
	Net/gross weight	kg	2.5/4.5	2.5/4.5	2.5/4.5
Piping connections	Liquid/gas pipe	mm	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7
	Drain pipe	mm	OD Φ25	OD Φ25	OD Φ25
Standard controller			Wireless remote controller		

Model			MDV-D36Q4/N1-A3	MDV-D45Q4/N1-A3
Power supply			1-phase,220-240V,50Hz	
Capacity	Cooling	kW	3.6	4.5
	Heating	kW	4.0	5.0
Power input	Cooling	W	56	56
	Heating	W	56	56
Airflow rate(H/M/L)		m ³ /h	521/409/314	521/409/314
Sound pressure level(H/M/L)		dB(A)	42/36/29	42/36/29
Main body	Net dim.(WxHxD)	mm	570x260x570	570x260x570
	Packing dim.(WxHxD)	mm	675x285x675	675x285x675
	Net/gross weight	kg	18/22	18/22
Panel	Net dim.(WxHxD)	mm	647x50x647	647x50x647
	Packing dim.(WxHxD)	mm	715x123x715	715x123x715
	Net/gross weight	kg	2.5/4.5	2.5/4.5
Piping connections	Liquid/gas pipe	mm	Φ6.35/Φ12.7	Φ6.35/Φ12.7
	Drain pipe	mm	OD Φ25	OD Φ25
Standard controller			Wireless remote controller	

Notes:

1. Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent ref. piping: 7.5m(horizontal).
2. Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent ref. piping: 7.5m(horizontal).
3. Sound level is measured at 1.4m below the unit.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

60Hz specification

Model			MDV-D22Q4/VN1-A3	MDV-D28Q4/VN1-A3
Power supply			1-phase,208-230V,60Hz	
Cooling capacity	kW		2.2	2.8
	Btu/h		7500	9600
Heating capacity	kW		2.4	3.2
	Btu/h		8200	10900
Power input	Cooling	W	50	50
	Heating	W	50	50
Airflow rate(H/M/L)		m ³ /h	397/292/215	408/310/231
		CFM	234/172/127	240/182/136
Sound pressure level(H/M/L)		dB(A)	35.8/33.4/23.4	35.8/33.4/23.4
Main body	Net dim.(WxHxD)	mm(in.)	570x260x570(22-7/16x10-15/64x22-7/16)	
	Packing dim.(WxHxD)	mm(in.)	675x285x675(26-9/16x11-7/32x26-9/16)	
	Net/gross weight	kg(lbs.)	16/20(35.3/44.1)	
Panel	Net dim.(WxHxD)	mm(in.)	647x50x647(25-15/32x1-31/32x25-15/2)	
	Packing dim.(WxHxD)	mm(in.)	715x123x715(28-5/32x4-27/32x28-5/32)	
	Net/gross weight	kg(lbs.)	2.5/4.5(5.5/9.9)	
Piping connections	Liquid/gas pipe	mm(in.)	Φ6.35/Φ12.7(Φ1/4/Φ1/2)	
	Drain pipe	mm(in.)	Φ25(OD 63/64)	
Standard controller			Wireless remote controller	

Model			MDV-D36Q4/VN1-A3	MDV-D45Q4/VN1-A3
Power supply			1-phase,208-230V,60Hz	
Cooling capacity	kW		3.6	4.5
	Btu/h		12300	15400
Heating capacity	kW		4.0	5.0
	Btu/h		13600	17100
Power input	Cooling	W	60	60
	Heating	W	60	60
Airflow rate(H/M/L)		m ³ /h	496/359/263	496/359/263
		CFM	292/211/155	292/211/155
Sound pressure level(H/M/L)		dB(A)	41.5/35.6/28.8	41.5/35.6/28.8
Main body	Net dim.(WxHxD)	mm(in.)	570x260x570(22-7/16x10-15/64x22-7/16)	
	Packing dim.(WxHxD)	mm(in.)	675x285x675(26-9/16x11-7/32x26-9/16)	
	Net/gross weight	kg(lbs.)	18/22(39.7/48.5)	
Panel	Net dim.(WxHxD)	mm(in.)	647x50x647(25-15/32x1-31/32x25-15/2)	
	Packing dim.(WxHxD)	mm(in.)	715x123x715(28-5/32x4-27/32x28-5/32)	
	Net/gross weight	kg(lbs.)	2.5/4.5(5.5/9.9)	
Piping connections	Liquid/gas pipe	mm(in.)	Φ6.35/Φ12.7(Φ1/4/Φ1/2)	
	Drain pipe	mm(in.)	Φ25(OD 63/64)	
Standard controller			Wireless remote controller	

Notes:

1. Nominal cooling capacities are based on the following conditions: return air temp.: 27°C(80.6°F)DB, 19°C(66.2°F)WB, outdoor temp.: 35°C(95°F)DB, equivalent ref. piping: 7.5m (24.6ft.) (horizontal).
2. Nominal heating capacities are based on the following conditions: return air temp.: 20°C(68°F)DB, outdoor temp.: 7°C(44.6°F)DB, 6°C(42.8°F)WB, equivalent ref. piping: 7.5m (24.6ft.) (horizontal).
3. Sound Level is measured 1.4m(4.59ft.) below the unit.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Four-way Cassette

- Fresh air intake
- Four-way airflow, allows wide-angle, equal distribution of cooling and heating
- Drain pump with 750mm pump head fitted as standard
- Optional brand-new, elegant panel



50Hz specification

Model			MDV-D28Q4/N1-E	MDV-D36Q4/N1-E	MDV-D45Q4/N1-E	MDV-D56Q4/N1-E	MDV-D71Q4/N1-E
Power supply			1-phase,220-240V,50Hz				
Capacity	Cooling	kW	2.8	3.6	4.5	5.6	7.1
	Heating	kW	3.2	4.0	5.0	6.3	8.0
Power input	Cooling	W	80	80	88	88	88
	Heating	W	80	80	88	88	88
Airflow rate(H/M/L)		m ³ /h	764/638//554	764/638//554	905/740//651	905/740//651	950/767//663
Sound pressure level(H/M/L)		dB(A)	32/31/30	32/31/30	36/34/33	36/34/33	38/36/35
Main body	Net dim.(WxHxD)	mm	840x230x840	840x230x840	840x230x840	840x230x840	840x230x840
	Packing dim.(WxHxD)	mm	955x260x955	955x260x955	955x260x955	955x260x955	955x260x955
	Net/gross weight	kg	21.5/26.7	21.5/26.7	23.7/28.9	23.7/28.9	23.7/28.9
Panel	Net dim.(WxHxD)	mm	950x54.5x950	950x54.5x950	950x54.5x950	950x54.5x950	950x54.5x950
	Packing dim.(WxHxD)	mm	1035x90x1035	1035x90x1035	1035x90x1035	1035x90x1035	1035x90x1035
	Net/gross weight	kg	6/9	6/9	6/9	6/9	6/9
Piping connections	Liquid/gas pipe	mm	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32
Standard controller			Wireless remote controller				

Model			MDV-D80Q4/N1-E	MDV-D90Q4/N1-E	MDV-D100Q4/N1-E	MDV-D112Q4/N1-E	MDV-D140Q4/N1-E
Power supply			1-phase,220-240V,50Hz				
Capacity	Cooling	kW	8.0	9.0	10.0	11.2	14.0
	Heating	kW	9.0	10.0	11.1	12.5	16.0
Power input	Cooling	W	110	140	165	165	176
	Heating	W	110	140	165	165	176
Airflow rate(H/M/L)		m ³ /h	1200/1021/789	1332/1129/908	1651/1304/1127	1651/1304/1127	1658/1335/1130
Sound pressure level(H/M/L)		dB(A)	42/39/37	43/39/38	45/42/40	45/42/40	46/41/39
Main body	Net dim.(WxHxD)	mm	840x230x840	840x300x840	840x300x840	840x300x840	840x300x840
	Packing dim.(WxHxD)	mm	955x260x955	955x330x955	955x330x955	955x330x955	955x330x955
	Net/gross weight	kg	23.7/28.9	28.7/34.1	28.7/34.1	28.7/34.1	30.9/36.3
Panel	Net dim.(WxHxD)	mm	950x54.5x950	950x54.5x950	950x54.5x950	950x54.5x950	950x54.5x950
	Packing dim.(WxHxD)	mm	1035x90x1035	1035x90x1035	1035x90x1035	1035x90x1035	1035x90x1035
	Net/gross weight	kg	6/9	6/9	6/9	6/9	6/9
Piping connections	Liquid/gas pipe	mm	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32
Standard controller			Wireless remote controller				

Notes:

1. Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent ref. piping: 7.5m(horizontal).
2. Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent ref. piping: 7.5m(horizontal).
3. Sound level is measured at 1.4m below the unit.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

60Hz specification

Model			MDV-D28Q4/VN1-E	MDV-D36Q4/VN1-E	MDV-D45Q4/VN1-E	MDV-D56Q4/VN1-E	MDV-D71Q4/VN1-E
Power supply			1-phase,208-230V,60Hz				
Cooling capacity		kW	2.8	3.6	4.5	5.6	7.1
		Btu/h	9600	12300	15400	19100	24200
Heating capacity		kW	3.2	4.0	5.0	6.3	8.0
		Btu/h	10900	13600	17100	21500	27300
Power input	Cooling	W	80	80	88	88	105
	Heating	W	80	80	88	88	105
Airflow rate(H/M/L)		m ³ /h	791/674/596	791/674/596	942/777/662	942/777/662	1235/1013/805
		CFM	465/396/351	465/396/351	554/457/389	554/457/389	726/596/474
Sound pressure level(H/M/L)		dB(A)	30/25/22	30/25/22	35/31/27	35/31/27	43/37/31
Main body	Net dim.(WxHxD)	mm(in.)	840x230x840(33-1/16x9-1/16x33-1/16)				
	Packing dim.(WxHxD)	mm(in.)	955x260x955(37-19/32x10-1/4x37-19/32)				
	Net/gross weight	kg(lbs.)	21.5/26.7(47.3/58.7)		23.7/28.9(52.1/63.6)		
Panel	Net dim.(WxHxD)	mm(in.)	950x54.5x950(37-13/32x2-9/64x37-13/32)				
	Packing dim.(WxHxD)	mm(in.)	1035x90x1035(40-3/4x3-9/16x40-3/4)				
	Net/gross weight	kg(lbs.)	6/9(13.2/19.8)				
Piping connections	Liquid/gas pipe	mm(in.)	Φ6.35/Φ12.7(Φ1/4/Φ1/2)			Φ9.53/Φ15.9(Φ3/8/Φ5/8)	
	Drain pipe	mm(in.)	Φ32(OD 1-17/64)				
Standard controller			Wireless remote controller				

Model			MDV-D80Q4/VN1-E	MDV-D90Q4/VN1-E	MDV-D100Q4/VN1-E	MDV-D112Q4/VN1-E	MDV-D140Q4/VN1-E
Power supply			1-phase,208-230V,60Hz				
Cooling capacity		kW	8.0	9.0	10.0	11.2	14.0
		Btu/h	27300	30700	34100	38200	47800
Heating capacity		kW	9.0	10.0	11.1	12.5	15.0
		Btu/h	30700	34100	37900	42700	51200
Power input	Cooling	W	120	187	200	200	220
	Heating	W	120	187	200	200	220
Airflow rate(H/M/L)		m ³ /h	1235/1013/805	1333/1158/957	1634/1219/1139	1634/1219/1139	1692/1243/1157
		CFM	726/596/474	784/681/563	961/717/670	961/717/670	995/731/681
Sound pressure level(H/M/L)		dB(A)	43/37/31	43/38/32	45/37/35	45/37/35	46/38/37
Main body	Net dim.(WxHxD)	mm(in.)	840x230x840(33-1/16x9-1/16x33-1/16)	840x300x840(33-1/16x11-13/16x33-1/16)			
	Packing dim.(WxHxD)	mm(in.)	955x260x955(37-19/32x10-1/4x37-19/32)	955x330x955(37-19/32x11-13/16x37-19/32)			
	Net/gross weight	kg(lbs.)	23.7/28.9(52.1/63.6)	28.7/34.1(63.1/75)			30.9/36.3(68/79.9)
Panel	Net dim.(WxHxD)	mm(in.)	950x54.5x950(37-13/32x2-9/64x37-13/32)				
	Packing dim.(WxHxD)	mm(in.)	1035x90x1035(40-3/4x3-35/64x40-3/4)				
	Net/gross weight	kg(lbs.)	6/9(13.2/19.8)				
Piping connections	Liquid/gas pipe	mm(in.)	Φ9.53/Φ15.9(Φ3/8/Φ5/8)				
	Drain pipe	mm(in.)	Φ32(OD 1-17/64)				
Standard controller			Wireless remote controller				

Notes:

1. Nominal cooling capacities are based on the following conditions: return air temp.: 27°C(80.6°F)DB, 19°C(66.2°F)WB, outdoor temp.: 35°C(95°F)DB, equivalent ref. piping: 7.5m (24.6ft.) (horizontal).
2. Nominal heating capacities are based on the following conditions: return air temp.: 20°C(68°F)DB, outdoor temp.: 7°C(44.6°F)DB, 6°C(42.8°F)WB, equivalent ref. piping: 7.5m (24.6ft.) (horizontal).
3. Sound Level is measured 1.4m(4.59ft) below the unit.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Medium Static Pressure Duct

- Fresh air intake
- Drain pump with 750mm pump head fitted as standard
- Flexible installation for the air inlet may be positioned either on the underside or the rear of the unit



50Hz specification

Model	MDV-D22T2/N1-DA5(A)	MDV-D28T2/N1-DA5(A)	MDV-D36T2/N1-DA5(A)	MDV-D45T2/N1-DA5(A)	MDV-D56T2/N1-DA5(A)		
Power supply	1-phase,220-240V,50Hz						
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6
	Heating	kW	2.6	3.2	4	5	6.3
Power input	Cooling	W	57	57	61	98	103
	Heating	W	57	57	61	98	103
Airflow rate(H/M/L)	m ³ /h	550/397/309	550/397/309	605/442/351	800/573/479	800/573/479	
External static pressure(Min/Std/Max)	Pa	0/10/30	0/10/30	0/10/30	0/10/30	0/10/30	
Sound pressure level(H/M/L)	dB(A)	32/24/21	31/24/21	35/28/24	36/29/26	36/29/26	
Net dimension(WxHxD)	mm	778x210x500	778x210x500	778x210x500	997x210x500	997x210x500	
Packing dimension(WxHxD)	mm	870x285x52	870x285x52	870x285x52	1115x285x52	1115x285x52	
Net/gross weight	k	18.5/22.2	18.5/22.2	18.5/22.2	22.9/26.8	22.9/26.8	
Piping connections	Liquid/gas pipe	mm	Φ6.4/Φ12.7	Φ6.4/Φ12.7	Φ6.4/Φ12.7	Φ9.5/Φ15.9	
	Drain pipe	m	OD Φ25	OD Φ25	OD Φ25	OD Φ25	
Standard controller	Wired controller						

Model	MDV-D71T2/N1-DA5(A)	MDV-D80T2/N1-BA5	MDV-D90T2/N1-BA5	MDV-D112T2/N1-BA5	MDV-D140T2/N1-BA5		
Power supply	1-phase,220-240V,50Hz						
Capacity	Cooling	kW	7.1	8.0	9.0	11.2	14.0
	Heating	kW	8	9.0	10.0	12.5	15.5
Power input	Cooling	W	140	198	200	313	274
	Heating	W	140	198	200	313	274
Airflow rate(H/M/L)	m ³ /h	985/738/630	1345/1165/1013	1345/1165/1013	1800/1556/1400	1905/1636/1400	
External static pressure(Min/Std/Max)	Pa	0/10/30	10/20/50	10/20/50	10/40/80	10/40/100	
Sound pressure level(H/M/L)	dB(A)	36/30/27	45/40/37	45/40/37	48/42/38	48/43/39	
Net dimension(WxHxD)	mm	1218x210x500	1230x270x775	1230x270x775	1230x370x77	1290x300x865	
Packing dimension(WxHxD)	mm	1335x285x525	1355x350x795	1355x350x795	1355x350x795	1400x375x925	
Net/gross weight	kg	28/33	38/46.5	40/48	40/48	49/58	
Piping connections	Liquid/gas pipe	mm	Φ9.5/Φ15.9	Φ9.5/Φ15.9	Φ9.5/Φ15.9	Φ9.5/Φ15.9	
	Drain pipe	mm	OD Φ25	OD Φ25	OD Φ25	OD Φ25	
Standard controller	Wired controller						

Notes:

1. Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent ref. piping: 7.5m(horizontal).
 2. Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent ref. piping: 7.5m(horizontal).
 3. Sound level is measured at 1.4m below the air outlet.
- External static pressure is based on high speed indoor air flow.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

60Hz specification

Model	MDV-D22T2/VN1-DA5	MDV-D28T2/VN1-DA5	MDV-D36T2/VN1-DA5	MDV-D45T2/VN1-DA5	MDV-D56T2/VN1-DA5		
Power supply	1-phase,208-230V,60Hz						
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	
	Btu/h	7500	9600	12300	15400	19100	
Heating capacity	kW	2.6	3.2	4.0	5.0	6.3	
	Btu/h	8200	10900	13600	17100	21500	
Power input	Cooling	W	66	72	77	100	100
	Heating	W	66	72	77	100	100
Airflow rate(H/M/L)	m ³ /h	538/456/375	538/456/375	597/514/429	811/684/575	811/684/575	
	CFM	317/268/221	317/268/221	351/303/253	477/403/338	477/403/338	
External static pressure(Min/Std/Max)	Pa	0/10/30	0/10/30	0/10/30	0/10/30	0/10/30	
Sound pressure level(H/M/L)	dB(A)	36/35/32	36/35/32	38.6/37.5/33.8	39/37.9/34	39/37.9/34	
Net dimension(WxHxD)	mm(in.)	30-45/64x8-17/64x19-11/16(780x210x500)			39-3/8x8-17/64x19-11/16(1000x210x500)		
Packing dimension(WxHxD)	mm(in.)	870x285x525(34-1/4x11-7/32x20-43/64)			1115x285x525(43-5/7x64x11-7/32x20-43/64)		
Net/gross weight	kg(lbs.)	17.5/20(38.6/44.1)			22.5/26(49.6/57.3)		
Piping connections	Liquid/gas pipe	mm(in.)	Φ6.35/Φ12.7(Φ1/4/Φ1/2)			Φ9.53/Φ15.9(Φ3/8/Φ5/8)	
	Drain piping	mm(in.)	Φ25(OD 63/64)				
Standard controller	Wired controller						

Model	MDV-D71T2/VN1-DA5	MDV-D80T2/VN1-BA5	MDV-D90T2/VN1-BA5	MDV-D112T2/VN1-BA5	MDV-D140T2/VN1-BA5		
Power supply	1-phase,208-230V,60Hz						
Cooling capacity	kW	7.1	8.0	9.0	11.2	14.0	
	Btu/h	24200	27300	30700	38200	47800	
Heating capacity	kW	8.0	9.0	10.0	12.5	15.5	
	Btu/h	27300	30700	34100	42700	52900	
Power input	Cooling	W	125	133	134	378	352
	Heating	W	125	133	134	378	352
Airflow rate(H/M/L)	m ³ /h	1029/934/781	1345/1165/1013	1345/1165/1013	1800/1556/1400	1905/1636/1400	
	CFM	606/550/460	792/686/596	792/686/596	1059/916/824	1121/963/824	
External static pressure(Min/Std/Max)	Pa	0/10/30	10/20/50	10/20/50	10/40/80	10/40/100	
Sound pressure level(H/M/L)	dB(A)	41.4/39/35	45.4/39.8/37	45.4/39.8/37	48.0/41.9/38	47.7/43.2/39	
Net dimension(WxHxD)	mm(in.)	48-1/32x8-17/64x19-11/16 (1220x210x500)	48-27/64x10-5/8x30-33/64(1230x270x775)			50-25/32(1290x300x865)	
Packing dimension(WxHxD)	mm(in.)	1335x285x525(52-9/16x 11-7/32x20-43/64)	1355x350x795(53-11/32x13-25/31x31-19/64)			1400x375x925(55-1/8x14- 49/64x36-27/64)	
Net/gross weight	kg(lbs.)	28/31.5(61.8/69.5)	38/46.5(84/102.5)	40/48(88.2/105.8)	49/58(108.0/127.9)		
Piping connections	Liquid/gas pipe	mm(in.)	Φ9.53/Φ15.9(Φ3/8/Φ5/8)				
	Drain piping	mm(in.)	Φ25(OD 63/64)				
Standard controller	Wired controller						

Notes:

1. Nominal cooling capacities are based on the following conditions: return air temp.: 27°C(80.6°F)DB, 19°C(66.2°F)WB, outdoor temp.: 35°C(95°F)DB, equivalent ref. piping: 7.5m (24.6ft.) (horizontal).
 2. Nominal heating capacities are based on the following conditions: return air temp.: 20°C(68°F)DB, outdoor temp.: 7°C (44.6°F)DB, 6°C(42.8°F)WB, equivalent ref. piping: 7.5m (24.6ft.) (horizontal).
 3. Sound Level is measured 1.4m(4.59ft.) below the unit.
- * External static pressure is based on high speed indoor air flow.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

High Static Pressure Duct

- External static pressure up to 280Pa facilitates extensive duct and grille network
- A double-skin drainage pan provides double protection for ceilings (models 71 to 160)
- Water pump box is available as a customization option

Standard wired controller
KJR-29B



50Hz specification

Model			MDV-D71T1/N1-B	MDV-D80T1/N1-B	MDV-D90T1/N1-B	MDV-D112T1/N1-B	MDV-D140T1/N1-B	MDV-D160T1/N1-B
Power supply			1-phase,220-240V,50Hz					
Capacity	Cooling	kW	7.1	8.0	9.0	11.2	14.0	16.0
	Heating	kW	8.0	9.0	10.0	12.5	16.0	17.0
Power input	Cooling	W	263	263	423	524	724	940
	Heating	W	263	263	423	524	724	940
Airflow rate(H/M/L)	m ³ /h		1443/1361/1218	1416/1338/1220	1951/1741/1518	2116/1936/1520	3000/2618/2226	3620/3044/2744
External static pressure(Min/Std/Max)	Pa		25/25/196	37/37/196	37/37/196	50/50/196	50/50/196	50/50/196
Sound pressure level(H/M/L)	dB(A)		48/46/44	48/46/45	52/49/47	52/49/47	53/50/48	54/52/50
Net dimension(WxHxD)	mm		952x420x690	952x420x690	952x420x690	952x420x690	1300x420x690	1300x420x690
Packing dimension(WxHxD)	mm		1090x440x768	1090x440x768	1090x440x768	1090x440x768	1436x450x768	1436x450x768
Net/gross weight	kg		45/50	45/50	46.5/52.4	50.6/56	68/70	70/77.5
Piping connections	Liquid/gas pipe	mm	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ25	OD Φ25	OD Φ25	OD Φ25	OD Φ25	OD Φ25
Standard controller			Wired controller					

Model			MDV-D200T1/N1-B	MDV-D250T1/N1-B	MDV-D280T1/N1-B	MDV-D400T1/N1	MDV-D450T1/N1	MDV-D560T1/N1
Power supply			1-phase,220-240V,50Hz					
Capacity	Cooling	kW	20.0	25.0	28.0	40.0	45.0	56.0
	Heating	kW	22.5	26.0	31.5	45.0	50.0	63.0
Power input	Cooling	W	1516	1516	1516	2700	2700	3400
	Heating	W	1516	1516	1516	2700	2700	3400
Airflow rate(H/M/L)	m ³ /h		4700/4100/3599	4700/4100/3599	4700/4100/3599	7472/6072/4995	7472/6072/4995	9550/7950/6600
External static pressure(Min/Std/Max)	Pa		50/200/280	50/200/280	50/200/280	50/200/280	50/200/280	50/200/280
Sound pressure level(H/M/L)	dB(A)		59/55/52	59/55/52	59/55/52	61/59/56	61/59/56	63/60/57
Net dimension(WxHxD)	mm		1440x505x925	1440x505x925	1440x505x925	1970x668x902.5	1970x668x902.5	1970x668x902.5
Packing dimension(WxHxD)	mm		1509x550x990	1509x550x990	1509x550x990	2095x800x964	2095x800x964	2095x800x964
Net/gross weight	kg		115/129	115/129	115/129	232/245	232/245	235/250
Piping connections	Liquid/gas pipe	mm	Φ9.53x2/Φ15.9x2	Φ9.53x2/Φ15.9x2	Φ9.53x2/Φ15.9x2	Φ9.53x2/Φ22.2x2	Φ9.53x2/Φ22.2x2	Φ9.53x2/Φ22.2x2
	Drain pipe	mm	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32	OD Φ32
Standard controller			Wired controller					

Notes:

1. Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent ref. piping: 7.5m(horizontal).
2. Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent ref. piping: 7.5m(horizontal).
3. Sound level is measured at 1.4m below the air outlet.
- External static pressure is based on high speed indoor air flow.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

60Hz specification

Model			MDV-D71T1/VN1-B	MDV-D80T1/VN1-B	MDV-D90T1/VN1-B	MDV-D112T1/VN1-B	MDV-D140T1/VN1-B	MDV-D160T1/VN1-B
Power supply			1-phase,208-230V,60Hz					
Cooling capacity	kW		7.1	8	9	11.2	14	15
	Btu/h		24200	27300	30700	38200	47800	51200
Heating capacity	kW		8	9	10	12.5	16	16.5
	Btu/h		27300	30700	34100	42700	54600	56300
Power input	Cooling	W	414	402	409	409	527	532
	Heating	W	414	402	409	409	527	532
Airflow rate(H/M/L)	m ³ /h		1720/1532/1338	1690/1560/1320	2252/2030/1610	2198/1978/1570	2969/2694/2469	2969/2694/2469
	CFM		1012/902/788	994/918/777	1326/1195/948	1294/1164/924	1746/1586/1453	1746/1586/1453
External static pressure(Min/Std/Max)	Pa		25/25/196	37/37/196	37/37/196	50/50/196	50/50/196	50/50/196
Sound pressure level(H/M/L)	dB(A)		48/46/45	48/46/45	52/49/47	52/49/47	53/50/48	54/52/50
Net dimension(WxHxD)	mm(in.)		952x420x690(37-31/64x16-17/32x27-11/64)				1300x420x690(51-3/16x15-3/4x27-5/32)	
Packing dimension(WxHxD)	mm(in.)		1090x440x768(42-29/32x17-21/64x30-15/64)				1436x450x768(56-17/32x17-23/32x30-15/64)	
Net/gross weight	kg(lbs.)		46.5/52(102.6/114.7)			50/56.5(110.3/124.6)		68/70(149.9/154.3) 69.5/76(153.3/167.6)
Piping connections	Liquid/gas pipe	mm(in.)	Φ9.53/Φ15.9(Φ3/8/Φ5/8)					
	Drain piping	mm(in.)	Φ25(OD 63/64)					
Standard controller			Wired controller					

Model			MDV-D200T1/N1-B	MDV-D250T1/N1-B	MDV-D280T1/N1-B	MDV-D400T1/N1	MDV-D450T1/N1	
Power supply			1-phase,208-230V,60Hz					
Cooling capacity	kW		20.0	25.0	28.0	40.0	45.0	
	Btu/h		68200	85300	95500	136500	153500	
Heating capacity	kW		22.5	26.0	31.5	45.0	50.0	
	Btu/h		76800	88700	107500	153500	170600	
Power input	Cooling	W	1516	1516	1516	1600	1600	
	Heating	W	1516	1516	1516	1600	1600	
Airflow rate(H/M/L)	m ³ /h		4700/4100/3599	4700/4100/3599	4700/4100/3599	7180/6150/4600	7180/6150/4600	
	CFM		2766/2413/2118	2766/2413/2118	2766/2413/2118	4226/3620/2708	4226/3620/2708	
External static pressure(Min/Std/Max)	Pa		50/200/280	50/200/280	50/200/280	50/200/280	50/200/280	
Sound pressure level(H/M/L)	dB(A)		59/55/52	59/55/52	59/55/52	61/59/56	61/59/56	
Net dimension(WxHxD)	mm(in.)		1440x505x925(56-11/16x19-7/8x36-27/6)			1970x668x902.5(77-9/16x15-3/4x35-17/32)		
Packing dimension(WxHxD)	mm(in.)		1509x550x990(59-13/32x21-21/32x38-31/32)			2095x800x964(82-31/64x31-1/2x37-61/64)		
Net/gross weight	kg(lbs.)		115/129(254/284)			235/250(518/551)		
Piping connections	Liquid/gas pipe	mm(in.)	Φ9.53/Φ15.9x2/(Φ3/8/Φ5/8)x2				Φ9.53/Φ22.2x2/(Φ3/8/Φ7/8)x2	
	Drain piping	mm(in.)	Φ32(OD 1-17/64)					
Standard controller			Wired controller					

Notes:

1. Nominal cooling capacities are based on the following conditions: return air temp.: 27°C(80.6°F)DB, 19°C(66.2°F)WB, outdoor temp.: 35°C(95°F)DB, equivalent ref. piping: 7.5m (24.6ft.) (horizontal).
2. Nominal heating capacities are based on the following conditions: return air temp.: 20°C(68°F)DB, outdoor temp.: 7°C (44.6°F)DB, 6°C(42.8°F)WB, equivalent ref. piping: 7.5m (24.6ft.) (horizontal).
3. Sound Level is measured 1.4m(4.59ft.) below the unit.
- * External static pressure is based on high speed indoor air flow.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Fresh Air Processing Unit

- 100% fresh air processing unit, both fresh air filtration and heating/cooling can be achieved in a single system
- External static pressure up to 280Pa facilitates extensive duct and grille network
- Water pump box is available as a customization option



50Hz specification

Model	MDV-D125T1/N1-FA		MDV-D140T1/N1-FA		MDV-D200T1/N1-FA	
Power supply	1-phase,220-240V,50Hz					
Capacity	Cooling	kW	12.5	14.0	20.0	
	Heating	kW	10.5	12.0	18.0	
Power input	Cooling	W	455	455	1060x2	
	Heating	W	455	455	1060x2	
Airflow rate(H/M/L)	m ³ /h		2142/1870/1611	2142/1870/1611	2870/2620/2150	
External static pressure(Min/Std/Max)	Pa		30/50/196	30/50/196	50/200/280	
Sound pressure level(H/M/L)	dB(A)		54/52/50	54/52/50	54/53/51	
Net dimension(WxHxD)	mm		1300x420x690	1300x420x690	1440x505x925	
Packing dimension(WxHxD)	mm		1436x450x768	1436x450x768	1509x550x990	
Net/gross weight	kg		69.5/76	69.5/76	115/125	
Piping connections	Liquid/gas pipe	mm	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9	
	Drain pipe	mm	OD Φ25	OD Φ25	OD Φ32	
Operation temperature range	°C		Heating: -5~16; Fan only: 16~20; Cooling: 20~43			
Standard controller			Wired controller			

Model	MDV-D250T1/N1-FA		MDV-D280T1/N1-FA	
Power supply	1-phase,220-240V,50Hz			
Capacity	Cooling	kW	25.0	28.0
	Heating	kW	20.0	22.0
Power input	Cooling	W	1126x2	1126x2
	Heating	W	1126x2	1126x2
Airflow rate(H/M/L)	m ³ /h		3005/2700/2250	3005/2700/2250
External static pressure(Min/Std/Max)	Pa		50/200/280	50/200/280
Sound pressure level(H/M/L)	dB(A)		55/54/52	55/54/52
Net dimension(WxHxD)	mm		1440x505x925	1440x505x925
Packing dimension(WxHxD)	mm		1509x550x990	1509x550x990
Net/gross weight	kg		115/125	115/125
Piping connections	Liquid/gas pipe	mm	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ32	OD Φ32
Operation temperature range	°C		Heating: -5~16; Fan only: 16~20; Cooling: 20~43	
Standard controller			Wired controller	

Notes:

1. Nominal cooling capacities are based on the following conditions: outdoor air temperature: 33°CDB, 28°CWB, equivalent ref. piping: 7.5m(horizontal).
2. Nominal heating capacities are based on the following conditions: outdoor air temperature: 0°CDB, -2.9°CWB, equivalent ref. piping: 7.5m(horizontal).
3. Sound level is measured at 1.4m below the air outlet.

External static pressure is based on high speed indoor air flow.

Connection Conditions:

The following restrictions must be observed in order to maintain the indoor units connection to the same system.

- * When outdoor-air processing units are connected, the total connection capacity must be within 50% to 100% of that of the outdoor units.
 - * When outdoor-air processing units and standard indoor units are connected, the total connection capacity of the outdoor-air processing units must not exceed 30% that of the outdoor units.
 - * Outdoor-air processing units can be used without indoor units.
 - * The fresh air processing unit is not available for V4+R system & 8~26kW side discharge outdoor units.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

60Hz specification

Model	MDV-D125T1/VN1-FA		MDV-D140T1/VN1-FA		MDV-D200T1/VN1-FA	
Power supply	1-phase,208-230V,60Hz					
Cooling capacity	kW	12.5	14.0	20.0		
	Btu/h	42600	47800	68200		
Heating capacity	kW	10.5	12.0	18.0		
	Btu/h	36000	41000	61400		
Power input	Cooling	W	455	455	1060x2	
	Heating	W	455	455	1060x2	
Airflow rate(H/M/L)	m ³ /h	2142/1870/1611	2142/1870/1611	2870/2620/2150		
	CFM	1261/1101/948	1261/1101/948	1689/1542/1265		
External static pressure(Min/Std/Max)	Pa	30/50/196	30/50/196	50/200/280		
Sound pressure level(H/M/L)	dB(A)	54/52/50	54/52/50	54/53/51		
Net dimension(WxHxD)	mm(in.)	1300x420x690(51-3/16x16-17/32x27-11/64)		1440x505x925(56-11/16x19-7/8x36-27/6)		
Packing dimension(WxHxD)	mm(in.)	1436x450x768(56-17/32x17-23/32x30-1/4)		1509x550x990(59-13/32x21-21/32x38-31/32)		
Net/gross weight	kg(lbs.)	69.5/76(153.2/167.5)		114/124(251/274)		
Piping connections	Liquid/gas pipe	mm(in.)	Φ9.53/Φ15.9/(Φ3/8/Φ5/8)			
	Drain piping	mm(in.)	Φ25(OD 63/64)		Φ32(OD 1-17/64)	
Standard controller		Wired controller				

Model	MDV-D250T1/VN1-FA		MDV-D280T1/VN1-FA	
Power supply	1-phase,208-230V,60Hz			
Cooling capacity	kW	25.0	28.0	
	Btu/h	85300	95500	
Heating capacity	kW	20.0	22.0	
	Btu/h	68200	75000	
Power input	Cooling	W	1126x2	
	Heating	W	1126x2	
Airflow rate(H/M/L)	m ³ /h	3005/2700/2250	3005/2700/2250	
	CFM	1766/1589/1324	1766/1589/1324	
External static pressure(Min/Std/Max)	Pa	50/200/280	50/200/280	
Sound pressure level(H/M/L)	dB(A)	55/54/52	55/54/52	
Net dimension(WxHxD)	mm(in.)	1440x505x925(56-11/16x19-7/8x36-27/6)		
Packing dimension(WxHxD)	mm(in.)	1509x550x990(59-13/32x21-21/32x38-31/32)		
Net/gross weight	kg(lbs.)	114/124(251/274)		
Piping connections	Liquid/gas pipe	mm(in.)	Φ9.53/Φ15.9/(Φ3/8/Φ5/8)	
	Drain piping	mm(in.)	Φ32(OD 1-17/64)	
Standard controller		Wired controller		

Notes:

1. Nominal cooling capacities are based on the following conditions: outdoor air temperature: 33°C(91.4°F)DB, 28°C(82.4°F)WB, equivalent ref. piping: 7.5m (24.6ft.) (horizontal).
2. Nominal heating capacities are based on the following conditions: outdoor air temperature: 0°C(32°F)DB, -2.9°C(26.8°F)WB, equivalent ref. piping: 7.5m (24.6ft.) (horizontal).
3. Sound Level is measured 1.4m(4.59ft.) below the unit.

* External static pressure is based on high speed indoor air flow.

Connection Conditions:

The following restrictions must be observed in order to maintain the indoor units connection to the same system.

- * When outdoor-air processing units are connected, the total connection capacity must be within 50% to 100% of that of the outdoor units.
 - * When outdoor-air processing units and standard indoor units are connected, the total connection capacity of the outdoor-air processing units must not exceed 30% that of the outdoor units.
 - * Outdoor-air processing units can be used without indoor units.
 - * The fresh air processing unit is not available for V4+R system & 8~26kW side discharge outdoor units.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Wall Mounted Unit

- Three interchangeable panels allow units to blend easily with any interior decoration, perfect for rooms with no false ceilings or free floor space
- Refrigerant outlet direction can be left, right or rear as the installation situation requires

Standard wireless remote controller



50/60Hz specification

Model			MI-22G/DHN1-M	MI-28G/DHN1-M	MI-36G/DHN1-M	MI-45G/DHN1-M
Power supply	1-phase,220-240V,50/60Hz					
Capacity	Cooling	kW	2.2	2.8	3.6	4.5
	Heating	kW	2.4	3.2	4	5
Power input	Cooling	W	8	9	19	19
	Heating	W	8	9	19	19
Airflow rate (H/M/L)	m ³ /h		422/393/356	417/370/316	656/573/488	594/507/424
Sound pressure level (H/M/L)	dB(A)		31/30/29	31/30/29	33/32/30	35/33/31
Net dimension (WxHxD)	mm		835x280x203	835x280x203	990x315x223	990x315x223
Packing dimension (WxHxD)	mm		935x385x320	935x385x320	1085x420x335	1085x420x335
Net/ Gross weight	kg		8.4/12.1	9.5/13.1	11.4/15.5	12.8/16.9
Piping connections	Liquid/gas pipe	mm	Φ6.35/Φ12.7			
	Drain pipe	mm	OD Φ16.5			
Standard controller	Wireless remote controller					

Model			MI-56G/DHN1-M	MI-71G/DHN1-M	MI-80G/DHN1-M	MI-90G/DHN1-M
Power supply	1-phase,220-240V,50/60Hz					
Capacity	Cooling	kW	5.6	7.1	8	9
	Heating	kW	6.3	8	9	10
Power input	Cooling	W	27	49	53	82
	Heating	W	27	49	53	82
Airflow rate (H/M/L)	m ³ /h		747/648/547	1195/1005/809	1195/1005/809	1421/1067/867
Sound pressure level (H/M/L)	dB(A)		38/36/34	44/39/36	44/39/36	48/43/38
Dimension (WxHxD)	mm		990x315x223	1194x343x262	1194x343x262	1194x343x262
Packing (WxHxD)	mm		1085x420x335	1290x375x460	1290x375x460	1290x375x460
Net/ Gross weight	kg		12.8/16.9	17/22.4	17/22.4	17/22.4
Piping connections	Liquid/gas pipe	mm	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ16.5			
Standard controller	Wireless remote controller					

Notes:

1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Sound pressure level is measured 1m in front and 1m below the unit in a semi-anechoic chamber.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Console

- Combination of four air inlets and two air outlets ensures that cooling and heating are distributed in all directions.

Standard wireless remote controller



50/60Hz specification

Model			MDV-D22Z/DN1-B	MDV-D28Z/DN1-B
Power supply	1-phase,220-240V,50Hz			
Capacity	Cooling	kW	2.2	2.8
	Heating	kW	2.6	3.2
Power input	Cooling	W	20	25
	Heating	W	20	25
Airflow rate(H/M/L)	m ³ /h		430/345/229	510/430/229
Sound pressure level(H/M/L)	dB(A)		38/32/26	39/33/27
Net dimension(WxHxD)	mm		700x600x210	700x600x210
Packing dimension(WxHxD)	mm		810x710x305	810x710x305
Net/gross weight	kg		14/19	15/20
Piping connections	Liquid/gas pipe	mm	Φ6.35/Φ12.7	Φ6.35/Φ12.7
	Drain pipe	mm	OD Φ16	OD Φ16
Standard controller	Wireless remote controller			

Model			MDV-D36Z/DN1-B	MDV-D45Z/DN1-B
Power supply	1-phase,220-240V,50Hz			
Capacity	Cooling	kW	3.6	4.5
	Heating	kW	4.0	5.0
Power input	Cooling	W	25	45
	Heating	W	25	45
Airflow rate(H/M/L)	m ³ /h		510/430/229	660/512/400
Sound pressure level(H/M/L)	dB(A)		39/33/27	42/39/36
Net dimension(WxHxD)	mm		700x600x210	700x600x210
Packing dimension(WxHxD)	mm		810x710x305	810x710x305
Net/gross weight	kg		15/20	15/20
Piping connections	Liquid/gas pipe	mm	Φ6.35/Φ12.7	Φ6.35/Φ12.7
	Drain pipe	mm	OD Φ16	OD Φ16
Standard controller	Wireless remote controller			

Notes:

1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
3. Sound pressure level is measured 1m in front and 1m above the floor in a semi-anechoic chamber.
4. Unit body dimensions given are the largest external dimensions of the unit, including hanger attachments.

Ceiling / Floor

- Can be installed either on the ceiling or floor

Standard wireless remote controller



RM05



50Hz specification

Model			MDV-D36DL/N1-C	MDV-D45DL/N1-C	MDV-D56DL/N1-C	MDV-D71DL/N1-C	MDV-D80DL/N1-C
Power supply			1-phase,220-240V,50Hz				
Capacity	Cooling	kW	3.6	4.5	5.6	7.1	8.0
	Heating	kW	4.0	5.0	6.3	8.0	9.0
Power input	Cooling	W	49	120	122	125	130
	Heating	W	49	120	122	125	130
Airflow rate(H/M/L)		m ³ /h	650/570/500	800/600/500	800/600/500	800/600/500	1200/900/700
Sound pressure level(H/M/L)		dB(A)	40/38/36	43/41/38	43/41/38	43/41/38	45/43/40
Net dimension(WxHxD)		mm	990x203x660	990x203x660	990x203x660	990x203x660	1280x203x660
Packing dimension(WxHxD)		mm	1089x296x744	1089x296x744	1089x296x744	1089x296x744	1379x296x744
Net/gross weight		kg	26/32	28/34	28/34	28/34	34.5/41
Piping connections	Liquid/gas pipe	mm	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ25	OD Φ25	OD Φ25	OD Φ25	OD Φ25
Standard controller			Wireless remote controller				

Model			MDV-D90DL/N1-C	MDV-D112DL/N1-C	MDV-D140DL/N1-C	MDV-D160DL/N1-C
Power supply			1-phase,220-240V,50Hz			
Capacity	Cooling	kW	9.0	11.2	14.0	16.0
	Heating	kW	10.0	12.5	15.0	18.0
Power input	Cooling	W	130	182	182	300
	Heating	W	130	182	182	300
Airflow rate(H/M/L)		m ³ /h	1200/900/700	1980/1860/1730	1980/1860/1730	2300/2100/1800
Sound pressure level(H/M/L)		dB(A)	45/43/40	47/45/42	47/45/42	49/47/44
Net dimension(WxHxD)		mm	1280x203x660	1670x244x680	1670x244x680	1670x285x680
Packing dimension(WxHxD)		mm	1379x296x744	1764x329x760	1764x329x760	1775x377x760
Net/gross weight		kg	34.5/41	54/59	54/59	57.5/63.5
Piping connections	Liquid/gas pipe	mm	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ25	OD Φ25	OD Φ25	OD Φ25
Standard controller			Wireless remote controller			

Notes:

1. Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent ref. piping: 7.5m(horizontal).
2. Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent ref. piping: 7.5m(horizontal).
3. Floor standing: Sound level is measured 1m horizontally and 1m vertically from the air-outlet.
Ceiling mounted: Sound level is measured 1m horizontally and 1m vertically from the air-outlet.

60Hz specification

Model			MDV-D36DL/N1-C	MDV-D45DL/N1-C	MDV-D56DL/N1-C	MDV-D71DL/N1-C
Power supply			1-phase, 220-240V, 60Hz			
Cooling capacity	kW		3.6	4.5	5.6	7.1
	Btu/h		12300	15400	19100	24200
Heating capacity	kW		4.0	5.0	6.3	8.0
	Btu/h		13600	17100	21500	27300
Power input	Cooling	W	50	148	148	148
	Heating	W	50	148	148	148
Airflow rate(H/M/L)		m ³ /h	600/480/400	750/650/550	750/650/550	750/650/550
		CFM	353/283/235	441/383/324	441/383/324	441/383/324
Sound pressure level(H/M/L)		dB(A)	40/38/36	43/41/38	43/41/38	43/41/38
Net dimension(WxHxD)		mm(in.)	990x203x660(38-31/32x7-63/64x25-63/64)			
Packing dimension(WxHxD)		mm(in.)	1089x296x744(42-7/8x11-21/32x29-9/32)			
Net/gross weight		kg(lbs.)	26/32(57.3/70.6)	28/34(61.7/75.0)	28/34(61.7/75.0)	28/34(61.7/75.0)
Piping connections	Liquid/gas pipe	mm(in.)	Φ6.35/Φ12.7(Φ1/4/Φ1/2)		Φ9.53/Φ15.9(Φ3/8/Φ5/8)	
	Drain piping	mm(in.)	Φ25(OD 63/64)			
Standard controller			Wireless remote controller			

Model			MDV-D80DL/N1-C	MDV-D90DL/N1-C	MDV-D112DL/N1-C	MDV-D140DL/N1-C	MDV-D160DL/VN1-C
Power supply			1-phase, 220-240V, 60Hz				
Cooling capacity	kW		8.0	9.0	11.2	14.0	16.0
	Btu/h		27300	30700	38200	47800	54600
Heating capacity	kW		9.0	10.0	12.5	15.0	18.0
	Btu/h		30700	34100	42700	51200	61400
Power input	Cooling	W	183	183	245	245	378
	Heating	W	183	183	245	245	378
Airflow rate(H/M/L)		m ³ /h	1200/900/700	1200/900/700	1980/1860/1730	1980/1860/1730	2300/2100/1800
		CFM	706/530/412	706/530/412	1165/1095/1018	1165/1095/1018	1354/1236/1060
Sound pressure level(H/M/L)		dB(A)	45/43/40	45/43/40	47/45/42	47/45/42	49/47/44
Net dimension(WxHxD)		mm(in.)	1280x203x660(50-25/64x7-63/64x25-63/64)		1670x244x680(65-3/4x9-39/64x26-49/64)		1670x285x680(65-3/4x11-7/32x26-49/64)
Packing dimension(WxHxD)		mm(in.)	1379x296x744(54-19/64x11-21/32x29-19/64)		1764x329x760(69-29/64x12-61/64x29-59/64)		1775x377x760(69-7/8x14-27/32x29-59/64)
Net/gross weight		kg(lbs.)	34.5/41(76.1/90.4)		54/59(119.0/130.1)		57.5/63.5(126.5/139.7)
Piping connections	Liquid/gas pipe	mm(in.)	Φ9.53/Φ15.9(Φ3/8/Φ5/8)				
	Drain piping	mm(in.)	Φ25(OD 63/64)				
Standard controller			Wireless remote controller				

Notes:

1. Nominal cooling capacities are based on the following conditions: return air temp.: 27°C(80.6°F)DB, 19°C(66.2°F)WB, outdoor temp.: 35°C(95°F)DB, equivalent ref. piping: 7.5m (24.6ft.) (horizontal).
2. Nominal heating capacities are based on the following conditions: return air temp.: 20°C(68°F)DB, outdoor temp.: 7°C (44.6°F)DB, 6°C(42.8°F)WB, equivalent ref. piping: 7.5m (24.6ft.) (horizontal).
3. Floor standing : Sound level is measured 1m(3.28ft.) horizontally and 1m(3.28ft.) vertically from the air-outlet.
Ceiling mounted: Sound level is measured 1m(3.28ft.) horizontally and 1m(3.28ft.) vertically from the air-outlet.

Floor Standing Unit (Concealed)

- Designed to be concealed in walls with only the suction and discharge grills visible



50Hz specification

Model			MDV-D22Z/N1-F3B	MDV-D28Z/N1-F3B	MDV-D36Z/N1-F3B	MDV-D45Z/N1-F3B
Power supply			1-phase,220-240V,50Hz			
Capacity	Cooling	kW	2.2	2.8	3.6	4.5
	Heating	kW	2.4	3.2	4.0	5.0
Power input	Cooling	W	40	46	46	49
	Heating	W	40	46	46	49
Airflow rate(H/M/L)		m ³ /h	530/456/400	569/485/421	624/522/375	660/542/440
Sound pressure level(H/M/L)		dB(A)	36/33/29	36/33/29	37/34/30	37/34/30
Net dimension(WxHxD)		mm	840x545x212	840x545x212	1040x545x212	1040x545x212
Packing dimension(WxHxD)		mm	939x639x305	939x639x305	1139x639x305	1139x639x305
Net/gross weight		kg	25/27	25/27	29.5/34	29.5/34
Piping connections	Liquid/gas pipe	mm	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7
	Drain pipe	mm	OD Φ25	OD Φ25	OD Φ25	OD Φ25
Standard controller			Wireless remote controller			


Model			MDV-D56Z/N1-F3B	MDV-D71Z/N1-F3B	MDV-D80Z/N1-F3B
Power supply			1-phase,220-240V,50Hz		
Capacity	Cooling	kW	5.6	7.1	8.0
	Heating	kW	6.3	8.0	9.0
Power input	Cooling	W	88	130	130
	Heating	W	88	130	130
Airflow rate(H/M/L)		m ³ /h	1150/970/830	1380/1100/870	1380/1100/870
Sound pressure level(H/M/L)		dB(A)	41/35/31	44/39/33	44/39/33
Net dimension(WxHxD)		mm	1340x545x212	1340x545x212	1340x545x212
Packing dimension(WxHxD)		mm	1425x639x305	1425x639x305	1425x639x305
Net/gross weight		kg	33/39	33/39	36/40
Piping connections	Liquid/gas pipe	mm	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ25	OD Φ25	OD Φ25
Standard controller			Wireless remote controller		

Notes:

- Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent ref. piping: 7.5m(horizontal).
- Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent ref. piping: 7.5m(horizontal).
- Specifications of F3B series are measured at 10Pa external static pressure and F4/F5 series at 0Pa.
- Sound level is measured 1m horizontally from the air-outlet and 1m vertically above the floor.

Floor Standing Unit (Exposed)

- The F4 (front air intake) and F5 (underside air intake) offer a choice of air intake options



50Hz specification

Model			MDV-D22Z/N1-F4	MDV-D28Z/N1-F4	MDV-D36Z/N1-F4	MDV-D45Z/N1-F4
			MDV-D22Z/N1-F5	MDV-D28Z/N1-F5	MDV-D36Z/N1-F5	MDV-D45Z/N1-F5
Power supply			1-phase,220-240V,50Hz			
Capacity	Cooling	kW	2.2	2.8	3.6	4.5
	Heating	kW	2.4	3.2	4.0	5.0
Power input	Cooling	W	40	46	46	49
	Heating	W	40	46	46	49
Airflow rate(H/M/L)		m ³ /h	530/456/400	569/485/421	624/522/375	660/542/440
Sound pressure level(H/M/L)	F4	dB(A)	36/33/29	36/33/29	37/34/30	37/34/30
	F5	dB(A)	36/33/29	36/33/29	37/34/30	37/34/30
Net dimension(WxHxD)	F4	mm	1000x596x225	1000x596x225	1200x596x225	1200x596x225
	F5	mm	1000x677x220	1000x677x220	1200x677x220	1200x677x220
Packing dimension(WxHxD)	F4	mm	1089x683x312	1089x683x312	1289x683x312	1289x683x312
	F5	mm	1182x683x312	1182x683x312	1382x683x312	1382x683x312
Net/gross weight	F4	kg	30/35	30/35	36/44	36/44
	F5	kg	30/38	30/38	35.5/41	35.5/41
Piping connections	Liquid/gas pipe	mm	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7	Φ6.35/Φ12.7
	Drain pipe	mm	OD Φ25	OD Φ25	OD Φ25	OD Φ25
Standard controller			Wireless remote controller			

Model			MDV-D56Z/N1-F4	MDV-D71Z/N1-F4	MDV-D80Z/N1-F4
			MDV-D56Z/N1-F5	MDV-D71Z/N1-F5	MDV-D80Z/N1-F5
Power supply			1-phase,220-240V,50Hz		
Capacity	Cooling	kW	5.6	7.1	8.0
	Heating	kW	6.3	8.0	9.0
Power input	Cooling	W	88	130	130
	Heating	W	88	130	130
Airflow rate(H/M/L)		m ³ /h	1150/970/830	1380/1100/870	1380/1100/870
Sound pressure level(H/M/L)	F4	dB(A)	41/35/31	44/39/33	44/39/33
	F5	dB(A)	41/35/31	44/39/33	44/39/33
Net dimension(WxHxD)	F4	mm	1500x596x225	1500x596x225	1500x596x225
	F5	mm	1500x677x220	1500x677x220	1500x677x220
Packing dimension(WxHxD)	F4	mm	1589x683x312	1589x683x312	1589x683x312
	F5	mm	1682x683x312	1682x683x312	1682x683x312
Net/gross weight	F4	kg	41/46.5	41/46.5	42.5/48.5
	F5	kg	42/51	42/51	44/53
Piping connections	Liquid/gas pipe	mm	Φ9.53/Φ15.9	Φ9.53/Φ15.9	Φ9.53/Φ15.9
	Drain pipe	mm	OD Φ25	OD Φ25	OD Φ25
Standard controller			Wireless remote controller		

Notes:

- Nominal cooling capacities are based on the following conditions: return air temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent ref. piping: 7.5m(horizontal).
- Nominal heating capacities are based on the following conditions: return air temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent ref. piping: 7.5m(horizontal).
- Specifications of F3B series are measured at 10Pa external static pressure and F4/F5 series at 0Pa.
- Sound level is measured 1m horizontally from the air-outlet and 1m vertically above the floor.

CONTROL SOLUTIONS

Wireless Remote Controllers

Wired Controllers

Centralized Controllers

Data Converter

























Network Control System

BMS Gateways

Accessories





















CONTROLLER LINEUP for V4+I(10-12HP)

Wireless Remote Controllers	Wired Remote Controllers	Centralized Controllers Data converter		Network Control System	BMS Gateways	Accessories	
 <p>RM05B RM12D</p> <p>2nd Gen. IDU</p>	 <p>WDC-86E/KD WDC-120G/WK</p> <p>2nd Gen. IDU</p>	 <p>CCM-180A/BWS</p>		 <p>IMMP-BAC</p>	 <p>IMMP-BAC</p>	 <p>MD-NIM05/E</p> <p>2nd Gen. IDU</p>	 <p>MD-NIM05B/E</p> <p>1st Gen. IDU</p>
 <p>RM02 RM05 RM12A</p> <p>1st Gen. IDU</p>	 <p>KJR-86C KJR-29B</p> <p>1st Gen. IDU</p>	 <p>CCM-270B/WS</p>		<p>+</p>  <p>IMMP-S</p>	 <p>GW-LON</p>	 <p>MD-NIM09</p> <p>2nd Gen. IDU</p>	 <p>MD-NIM09E</p> <p>1st Gen. IDU</p>
	 <p>KJR-120B KJR-120C</p> <p>1st Gen. IDU</p>	 <p>CCM-15</p>		 <p>CCM-270B/WS</p>	 <p>GW-MOD</p>	 <p>KJR-150A</p> <p>1st Gen. IDU</p>	
				<p>+</p>  <p>IMMP-S</p>	<p>1st Gen. IDU</p>  <p>MD-KNX</p> <p>2nd Gen. IDU</p>  <p>GW-KNX</p>	 <p>MA-EK</p>	<p>2nd Gen. IDU</p>  <p>MCAC-PIDU</p>

Note:





















1. No comment of 1st generation AC/DC IDU or 2nd generation DC IDU on the superscript means all of the indoor series can be used.

CONTROLLER LINEUP for VC Pro

Wireless Remote	Wired Controller & Centralized Controller	Data Converter		Network Control System	BMS Gateways	Accessories
 <p>1st Gen. IDU</p> <p>RM05</p>	 <p>1st Gen. IDU</p> <p>KJR-29B</p>	 <p>CCM-15</p>		 <p>IMMP-BAC</p>	 <p>IMMP-BAC</p>	<p>2nd Gen. IDU 1st Gen. IDU</p> <p>Hotel Key Card Interface Module</p>  <p>MD-NIM05/E MD-NIM05B/E</p>
 <p>2nd Gen. IDU</p> <p>RM12D(C)</p>	 <p>2nd Gen. IDU</p> <p>WDC-86E/KD</p>		<p>+</p>  <p>IMMP-S</p>	 <p>GW-LON</p>	<p>2nd Gen. IDU 1st Gen. IDU</p> <p>Infrared Sensor Controller</p>  <p>MD-NIM09</p>	
	 <p>2nd Gen. IDU</p> <p>WDC-120G/WK</p>				 <p>GW-MOD</p>	<p>2nd Gen. IDU</p> <p>Indoor Unit Online Kit</p>  <p>MCAC-PIDU</p> <p>XYE Extension Kit</p>  <p>MA-EK</p>
	 <p>CCM30</p>				<p>1st Gen. IDU 2nd Gen. IDU</p>  <p>MD-KNX GW-KNX</p>	<p>1st Gen. IDU</p> <p>Indoor unit group controller</p>  <p>KJR-150A</p>

Note: No comment of 1st generation AC/DC IDU or 2nd generation DC IDU on the superscript means all of the indoor series can be used.

CONTROLLER LINEUP for V5X/V4+R/ V4+I (except for 10-12HP)/V4+W/Mini VRF




Wireless Remote Controllers	Wired Remote Controllers	Centralized Controllers		Network Control System Data Converter	BMS Gateways	Accessories
 <p>2nd Gen. IDU</p> <p>RM05B RM12D</p>	 <p>2nd Gen. IDU</p> <p>WDC-86E/KD WDC-120G/WK</p>	 <p>2nd Gen. IDU</p> <p>CCM-180A/BWS</p>		<p>M-interface Gateway</p> 	<p>BACnet Gateway</p>  <p>MD-CCM08</p>	<p>Hotel Key Card Interface Module</p>  <p>2nd Gen. IDU 1st Gen. IDU</p> <p>MD-NIM05/E MD-NIM05B/E</p>
 <p>1st Gen. IDU</p> <p>RM02 RM05 RM12A</p>	 <p>1st Gen. IDU</p> <p>KJR-86C KJR-29B</p>	 <p>2nd Gen. IDU</p> <p>CCM-270B/WS</p>		<p>+</p> <p>IMM Software</p> 	<p>LonWorks Gateway</p>  <p>LonGW64</p>	<p>Infrared Sensor Controller</p>  <p>2nd Gen. IDU 1st Gen. IDU</p> <p>MD-NIM09</p>
	 <p>1st Gen. IDU</p> <p>KJR-120B KJR-120C</p>	 <p>MD-CCM09</p>		 <p>CCM-15</p>	<p>Modbus Gateway</p>  <p>CCM-18A/N CCM-18A/N-U</p>	<p>Remote Alarm Controller</p> <p>Network Electricity Distribution Module (Special for Mini VRF)</p> <p>Indoor unit group controller</p>  <p>1st Gen. IDU</p> <p>KJR-32B MD-NIM10 KJR-150A</p>
		 <p>CCM30</p>			<p>1st Gen. IDU 2nd Gen. IDU</p>  <p>MD-KNX GW-KNX</p>	<p>Diagnosis software (Special for V5X)</p> <p>XYE Extension Kit</p> <p>Indoor Unit Online Kit</p>  <p>MCAC-DIAG-B MA-EK MCAC-PIDU</p>

Note:
 1. No comment of 1st generation AC/DC IDU or 2nd generation DC IDU on the superscript means all of the indoor series can be used.
 2. CCM-180A/BWS and CCM-270B/WS are only available for 2nd generation DC Indoor unit.




Wireless Remote Controllers

Features

Model	 RM05B	 RM12D RM12D(C)	 RM02	 RM05	 RM12A
On / Off	●	●	●	●	●
Mode selection	●	●	●	●	●
Temperature setting	● (0.5°C or 1°C steps)	● (0.5°C or 1°C steps)	● (1°C steps)	● (1°C steps)	● (1°C steps)
7-speed fan control	●	●	—	—	—
Auto swing	●	●	●	●	●
5-step swing louver	●	●	—	—	—
Address setting	●	●	●	●	●
Follow me	—	●	●	—	●
Eco mode	●	●	●	●	●
Night silent mode	●	●	—	—	●
Display shut-off	●	●	—	—	—
Daily timer	●	●	●	●	●
Keyboard lock	●	●	●	●	●
Background light	●	●	●	●	●
Dimensions (HxWxD) (mm)	150x65x20	170x48x20	150x65x15	150x65x20	170x48x20
Batteries	1.5V (LR03/AAA) x 2				
Indoor unit series	2 nd generation DC IDU			1 st generation AC/DC IDU	


Temperature Setting

Set temperature can be adjusted in 0.5°C or 1°C steps, enabling precise comfort control.

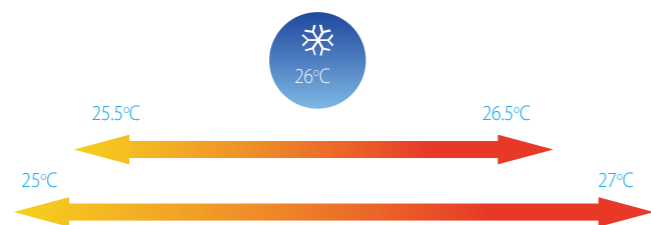


7-Speed Fan Control

7 indoor fan speeds provide control flexibility to meet the needs of different indoor conditions.

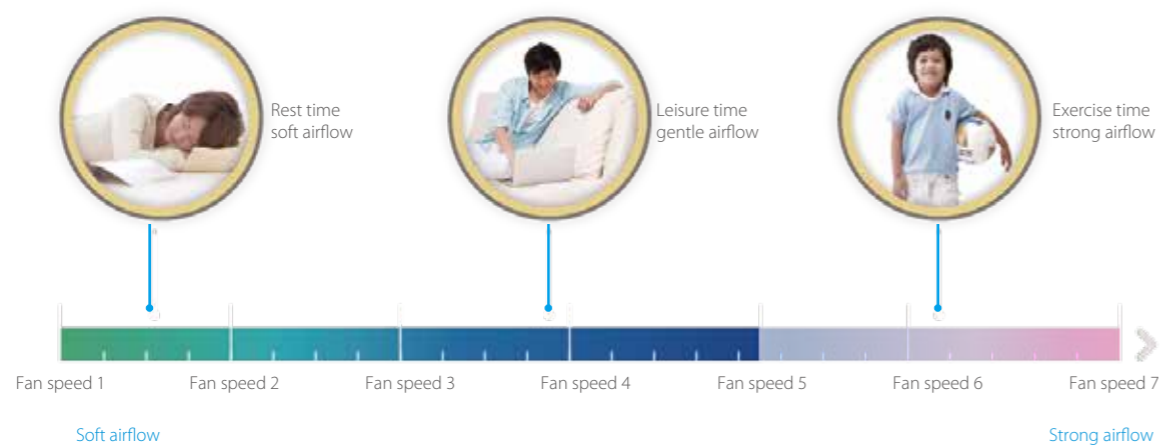


Display Shut-off

Indoor unit displays can be shut off at night, creating a better environment for rest.

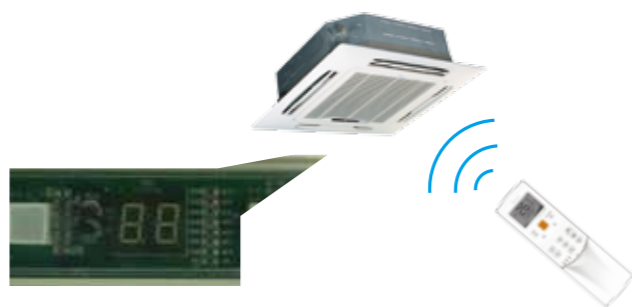

5 Swing Angles for Louver

Thanks to the 5 swing angles for indoor unit louver, the air flow direction can be controlled more precisely.

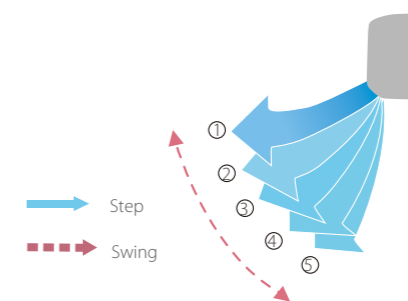

Follow Me

With the follow me function, the indoor unit responds to the temperature measured by the temperature sensor built-in to the wireless remote controller, rather than the temperature sensor in the indoor unit itself, enabling more precise control of the temperature in the user's immediate environment.



Eco Mode

Eco mode saves energy whilst retaining a comfortable indoor environment.





Wired Controllers



Features

Model	WDC-86E/KD	WDC-120G/WK
On / Off	●	●
Mode selection	●	●
Temperature setting	● (0.5°C or 1°C steps)	● (0.5°C or 1°C steps)
Dual temperature set points	●	●
7-speed fan control	●	●
Auto swing	●	●
5-step swing louver	●	●
Address setting	●	●
Follow me	●	●
Eco mode	●	●
Room temperature display	●	●
°F/°C display	●	●
Keyboard lock	—	●
Background light	●	●
Daily timer	●	●
Weekly schedule timer	—	●
Auto restart	●	●
2 permission levels	—	●
Bi-directional communication	●	●
Group control	—	●
Main or secondary controller setting	●	●
Display shut-off	●	●
Night silent mode	●	●
Remote signal receiver	●	●
Clean filter reminder	●	●
Extension function	—	●
Daylight saving time	—	●
Clock display	—	●
Dot matrix display	—	●
Error check function	●	●
System parameter querying	●	●
System setting control	●	●
Dimensions (WxHxD) (mm)	86x86x18	120x120x20
Power supply	18V DC	18V DC
Indoor unit series	2 nd generation DC IDU	

Model	 KJR-86C	 KJR-29B
On / Off	●	●
Mode selection	●	●
Temperature setting	● (1°C steps)	● (1°C steps)
Dual temperature set points	—	—
7-speed fan control	—	—
Auto swing	—	●
5-step swing louver	—	—
Address setting	—	●
Follow me	—	●
Eco mode	●	—
Room temperature display	—	—
°F/°C display	—	—
Keyboard lock	—	●
Background light	—	●
Daily timer	—	●
Weekly schedule timer	—	—
Auto restart	●	●
2 permission levels	—	—
Bi-directional communication	—	—
Group control	—	—
Main or secondary controller setting	—	—
Display shut-off	—	—
Night silent mode	—	—
Remote signal receiver	—	●
Clean filter reminder	—	●
Extension function	—	—
Daylight saving time	—	—
Clock display	—	●
Dot matrix display	—	—
Error check function	—	—
System parameter querying	—	—
System setting control	—	—
Dimensions (WxHxD) (mm)	86x86x18	120x120x20
Power supply	5V DC	
Indoor unit series	1 st generation AC/DC IDU	

Model	 KJR-120B	 KJR-120C
On / Off	●	●
Mode selection	●	●
Temperature setting	● (1°C steps)	● (1°C steps)
Dual temperature set points	—	—
7-speed fan control	—	—
Auto swing	●	●
5-step swing louver	—	—
Address setting	—	—
Follow me	—	—
Eco mode	—	—
Room temperature display	—	—
°F/°C display	—	—
Keyboard lock	●	●
Background light	●	●
Daily timer	●	●
Weekly schedule timer	—	●
Auto restart	●	●
2 permission levels	—	—
Bi-directional communication	●	●
Group control	—	—
Main or secondary controller setting	—	—
Display shut-off	—	—
Night silent mode	●	—
Remote signal receiver	—	—
Clean filter reminder	●	—
Extension function	—	●
Daylight saving time	—	—
Clock display	●	●
Dot matrix display	—	—
Error check function	●	●
System parameter querying	—	—
System setting control	—	—
Dimensions (WxHxD) (mm)	120x120x20	120x120x20
Power supply	5V DC	12V DC
Indoor unit series	1 st generation AC/DC IDU	

Group Control

One controller can be used to unify the settings across up to 16 indoor units.




Main or Secondary Controller Setting

Two controllers can be used together with the indoor units' operating mode and settings being set according to the most recent instruction received. The controller display screens are synchronized so that both displays update when a setting is adjusted.



2 Permission Levels

2 permission levels ensure users can easily access control functions and allow administrators convenient access to operating parameters.




Extension Function

The extension function is specifically designed for users working overtime. Pressing the delay button postpones system shutdown by 1 or 2 hours.



Weekly Schedule Timer

The weekly schedule timer allows users to set multiple schedules each with its own operating mode, temperature settings and fan speeds.

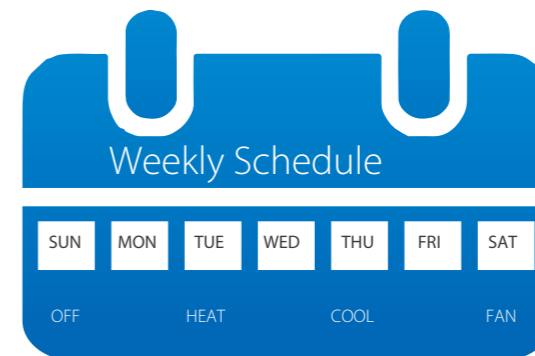

Bi-directional Communication

The wired controller can query the system operating parameters thanks to the new bi-directional communication functionality. In addition, settings including static pressure, cold draft prevention and temperature compensation can be configured on the wired controller.







Note: This function is only available for VC pro/V4+I(10-12HP) outdoor unit connected to 2nd generation DC indoor unit.

Centralized Controllers



Features

Function	 CCM-180A/BWS	 CCM-270B/WS	 CCM30	 CCM09
Max. number of indoor units	64	384	64	64
Max. number of refrigerant systems	8	48	8	8
Touch screen	● (6.2-inch)	● (10.1-inch)	—	—
On/Off	●	●	●	●
Mode selection	●	●	●	●
Temperature setting	● (0.5°C setps)*		● (1°C setps)	
7-speed fan control	7-speed fan control (HP VRF)*; 3-speed fan control (HR VRF)		3-speed fan control	
Auto swing	●	●	●	●
5-step swing louver*	●	●	—	—
Room temperature display	—	●	●	●
Holiday setting	●	●	—	—
°C/°F display	●	●	●	●
Schedule management	●	●	●	Weekly timer
Clock display	●	●	—	—
2 permission levels	●	●	—	—
Extension function	●	—	—	—
Indoor unit type/model recognition	● (HP VRF)*; — (HR VRF)		—	—
Indoor unit with capacity larger than 16kW recognition	● *		Identify as two or four units (depend on units model)	
Visual schematic	—	●	—	—
Energy management	●	●	Mode/Remote controller limit	
Group management	●	●	—	—
Error check function	● *	● *	●	●
System parameter querying	—	—	●	●
USB output	●	●	—	—
Report display	Error report	Error report and operation record	—	—
Operation log	—	●	—	—
LAN access	—	●	—	—
Language supported	English			
Dimensions (WxHxD) (mm)	182x123x34	270x183x27	179x119x74	179x119x74
Power supply	12V DC	24V AC	198-242V AC (50/60Hz)	
Outdoor unit series or indoor unit series	V4+(10-12HP) ODU or 2nd generation indoor unit		VC pro/V5X/V4+RV4+(except for 10-12HP)/V4+W/Mini VRF ODU	V5X/V4+RV4+(except for 10-12HP)/V4+W/Mini VRF ODU

Note: *means this function is only available for VC pro/V4+(10-12HP) outdoor unit connected to 2nd generation DC indoor unit.

Touch Screen

Colorful touch screen and vivid display make operation more convenient and simple.




Electricity Charge Distribution

The controllers use the patented Midea Calculation Method to estimate the electricity consumption of the outdoor units and then divide it among the indoor units so that the electricity charges can be equitably divided among building occupants.



Energy Management

User can set limits or locks on an indoor unit, such as minimum cooling temperature, maximum heating temperature, fan speed, operation mode, swing lock, remote controller lock and wired controller lock.

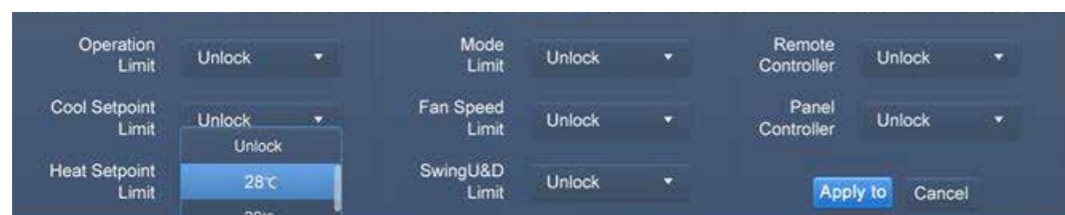

Visual Schematic

By importing floor plans and then dragging and dropping the indoor units to their actual positions on the floor plan, users can create a tailored system schematic which enables monitoring and control of the indoor units through a clear visual representation of the system layout.



Group Management

Units can be viewed according to group, system or location, making unit management clearer and more convenient.



Outdoor Unit Configuration

Outdoor unit configuration and settings can be monitored and controlled without having to go outdoors.



Note: This function is only available for VC pro outdoor unit.


Unit Model Recognition

The controller recognizes the model of indoor and outdoor units and different models are represented by different icons.



Schedule Management

Daily, weekly or annual schedules can be used to set unit settings such as on/off, operating mode, set temperature, fan speed and swing.

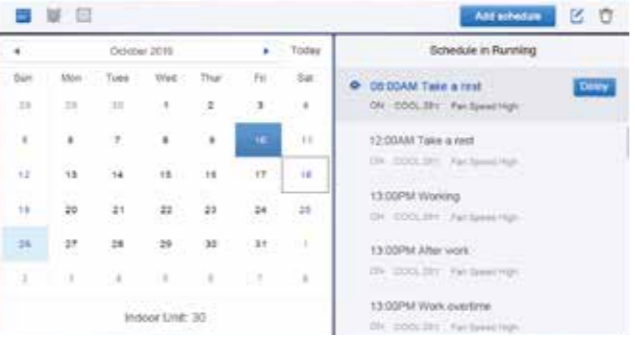



LAN Access

A desktop or laptop PC can be used for browser-based access via a LAN connection.



Wiring Flexibility

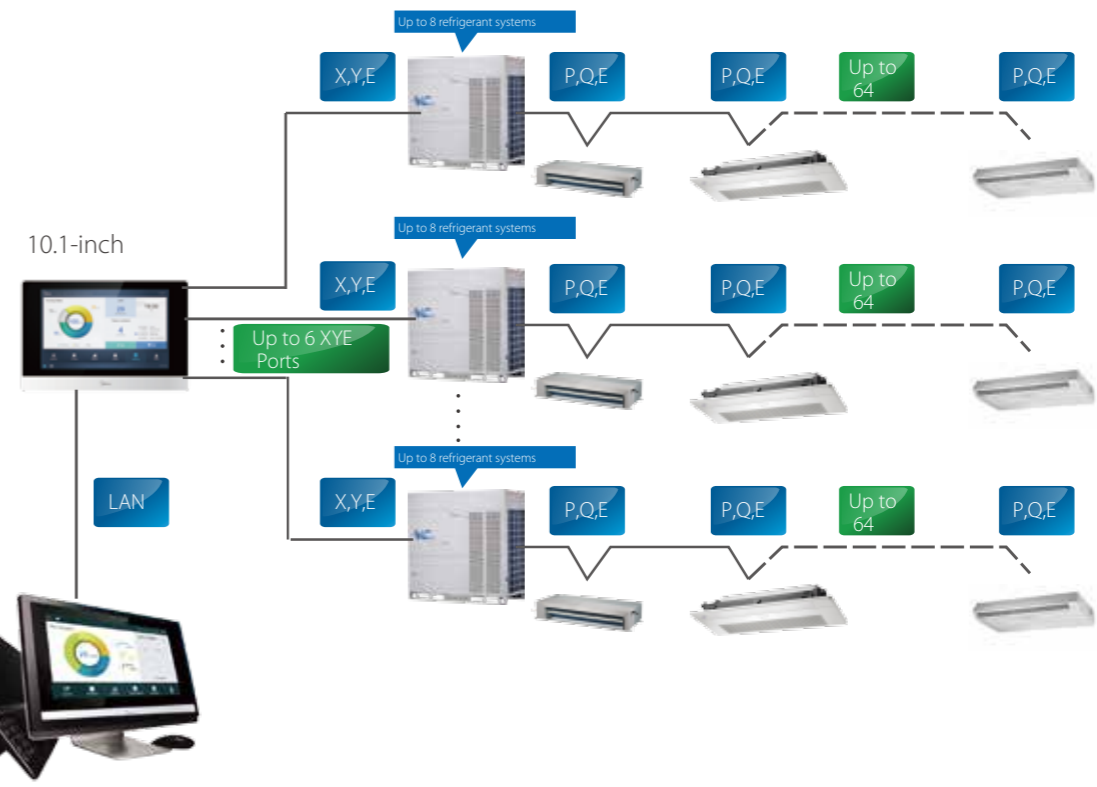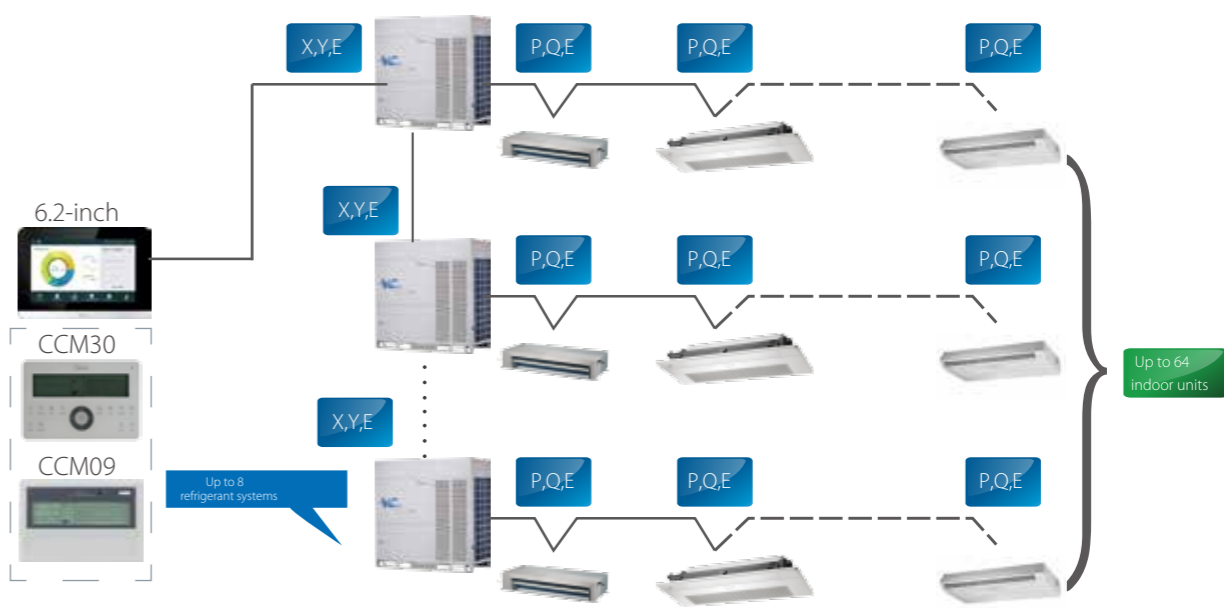


The controllers can be connected to the master outdoor unit directly.



Data Converter



Features

Hardware model	 CCM-15	
Application scenarios	 Mobile Phone Application	 Cloud Server Website
Max. number of CCM-15 for one mobile APP	10	10
Max. number of indoor units	640	640
Max. number of refrigerant systems	80	80
On/Off	●	●
Mode selection	●	●
Temperature setting	● (1°C steps)	● (1°C steps)
7-speed fan control	—	—
Auto swing	●	●
5-step swing louver	—	—
Room temperature display	●	●
°C/°F display	●	●
Weekly timer	●	●
Indoor unit type recognition	—	—
Energy management	●	●
Group management	●	●
User group management	●	●
Operation log	●	●
Device log	●	●
Login record	●	●
Error log	—	●
Configuration	●	—
Account registration	●	—
Virtual	●	—
Mode display	●	●
Languages supported	English, French, Spanish	English, French, Spanish
Dimensions (WxHxD) (mm)	187x115x28	
Power supply	1 phase, 100-240V, 50/60Hz	
Outdoor unit series	All series	

High Compatibility

Compatible with a variety of operating systems.



User Friendly Interface

Clear, stylish interface designed by leading industrial designers.



Cloud Server Website

In addition to "M-control", users can control air conditioners and query the status of air conditioning equipment anytime and anywhere through the cloud server website.



Virtual Experience

After downloading "M-control", you can experience the operation of the interface through the virtual experience function without registration.



Easy Configuration

User groups can be joined simply by scanning a QR code.



Convenient Operation

Drag the position of the floating bubbles to change temperature and fan speed.



Anytime Control

Remote access to CCM-15 allows anytime, anywhere control.



Clear Icons

Clear, color-coded icons allow unit operating states to be viewed at a glance.




Group Management

The user can group the air conditioners equipment, and the air conditioner in the same group can be controlled together just with one tap.



2 Permission Levels

Administrators can set different permissions for different users to facilitate better management of devices.




Multiple Language Options

Supports multiple languages so that users of different languages can operate easily.



Flexibility


The Data Converter can be connected directly to a network of indoor/outdoor units.

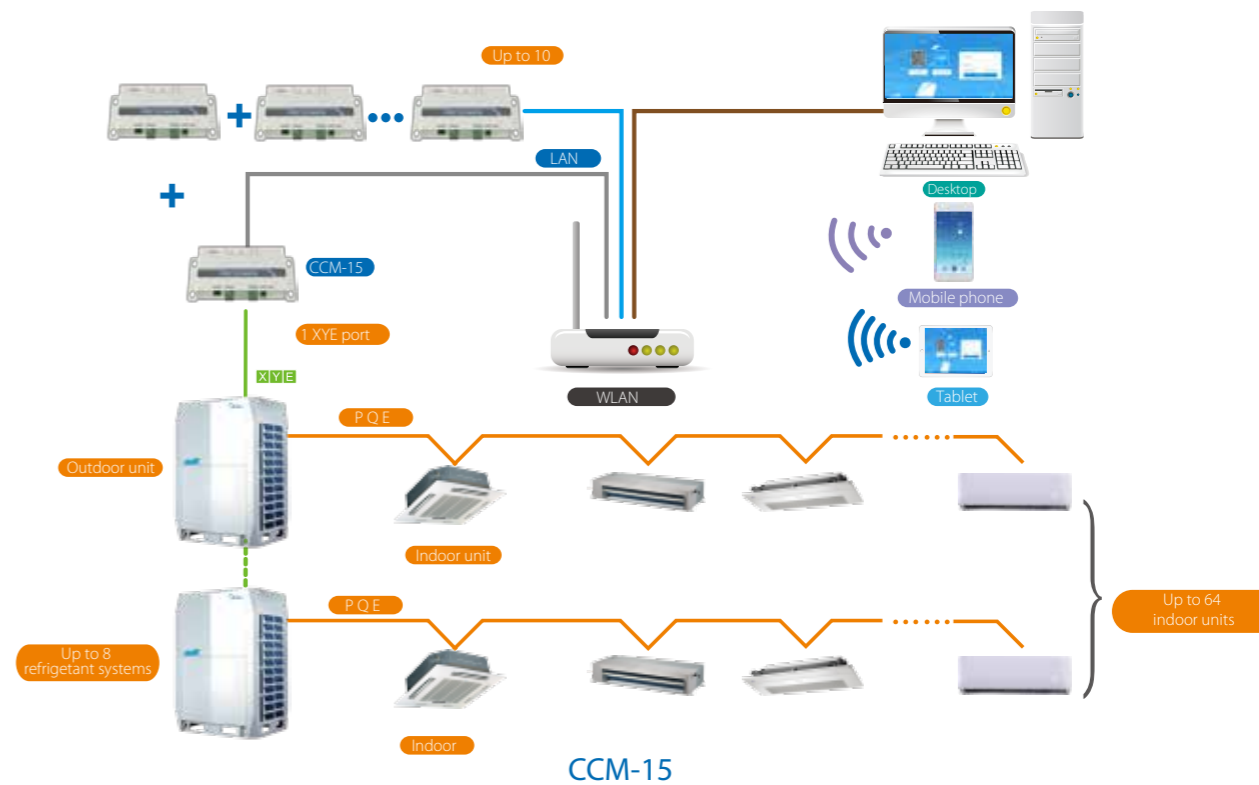

Network Control System



Features

Software model	 IMMP-S		 IMM
Hardware model	 IMMP-BAC	 CCM-270B/WS	 M-interface
Max. number per software system	10	10	4
Max. number of indoor units	2560	3840	1024
Max. number of refrigerant systems	320	480	16
Temperature setting	● (0.5°C steps)	● (0.5°C steps)	● (1°C steps)
7-speed fan control*	●	●	— (3-speed)
Auto swing	●	●	●
5-step swing louver*	●	●	—
Outdoor unit Eco mode setting	●	●	—
Holiday setting	●	●	—
Schedule management	●	●	●
Clock display	●	●	●
2 permission levels	●	●	●
Unit model recognition	●	●	—
Electricity charge distribution	●	●	●
Visual schematic	●	●	●
Energy management	●	●	●
Group management	●	●	●
Error check function	●	●	●
System parameter querying	●	●	●
Report output	●	●	●
Operation log	●	●	●
LAN access	●	●	●
Languages supported	English	English	9 languages
Dimensions (WxHxD) (mm)	251x319x61	270x183x27	251x319x66
Power supply	1 phase, 100-240V, 50/60Hz	24V AC	1 phase, 100-240V, 50/60Hz
Outdoor unit series	VC pro/V4+(10-12HP) ODU		V5X/V4+R/V4+(except for 10-12HP)/V4+W/Mini VRF ODU

Note: *means this function is only available for VC pro/V4+(10-12HP) outdoor unit connected to 2nd generation DC indoor unit.

User-friendly Interface

Simple, practical user interface makes for a user-friendly experience even for first-time users.



Outdoor Unit Configuration


Outdoor unit configuration and settings can be monitored and controlled without having to go outdoors.



Note: This function is only available for VC pro outdoor unit.


Electricity Charge Distribution

The IMMPRO uses the patented Midea Calculation Method to estimate the electricity consumption of the outdoor units and then divide it among the indoor units so that the electricity charges can be equitably divided among building occupants.

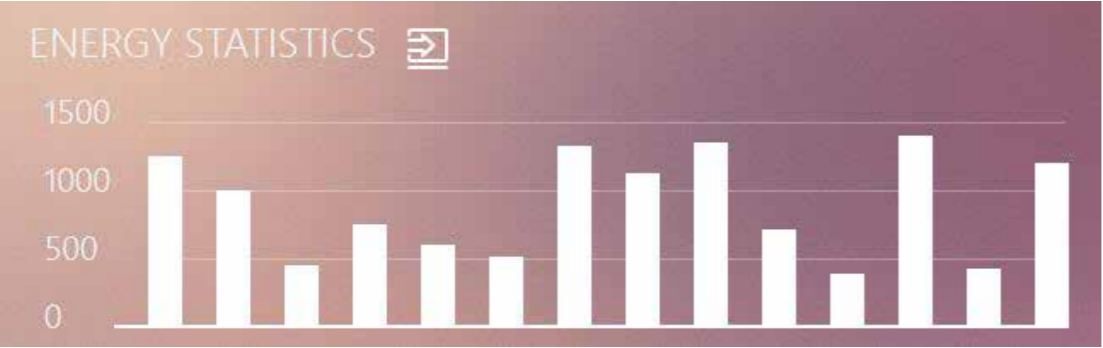

Public and Idle Devices

Marking a unit as a public device or idle device ensures the electricity charge distribution is more accurate and reasonable.

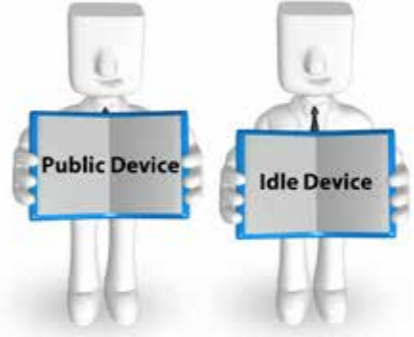

Visual Schematic

By importing floor plans and then dragging and dropping the indoor units to their actual positions on the floor plan, users can create a tailored system schematic which enables monitoring and control of the indoor units through a clear visual representation of the system layout.



Schedule Management


Daily, weekly or annual schedules can be used to set unit settings such as on/off, operating mode, set temperature, fan speed and swing.




With the Xpress Installation wizard, IMMPRO can be installed quickly and easily without requiring support from a technical support engineer.




Network Flexibility

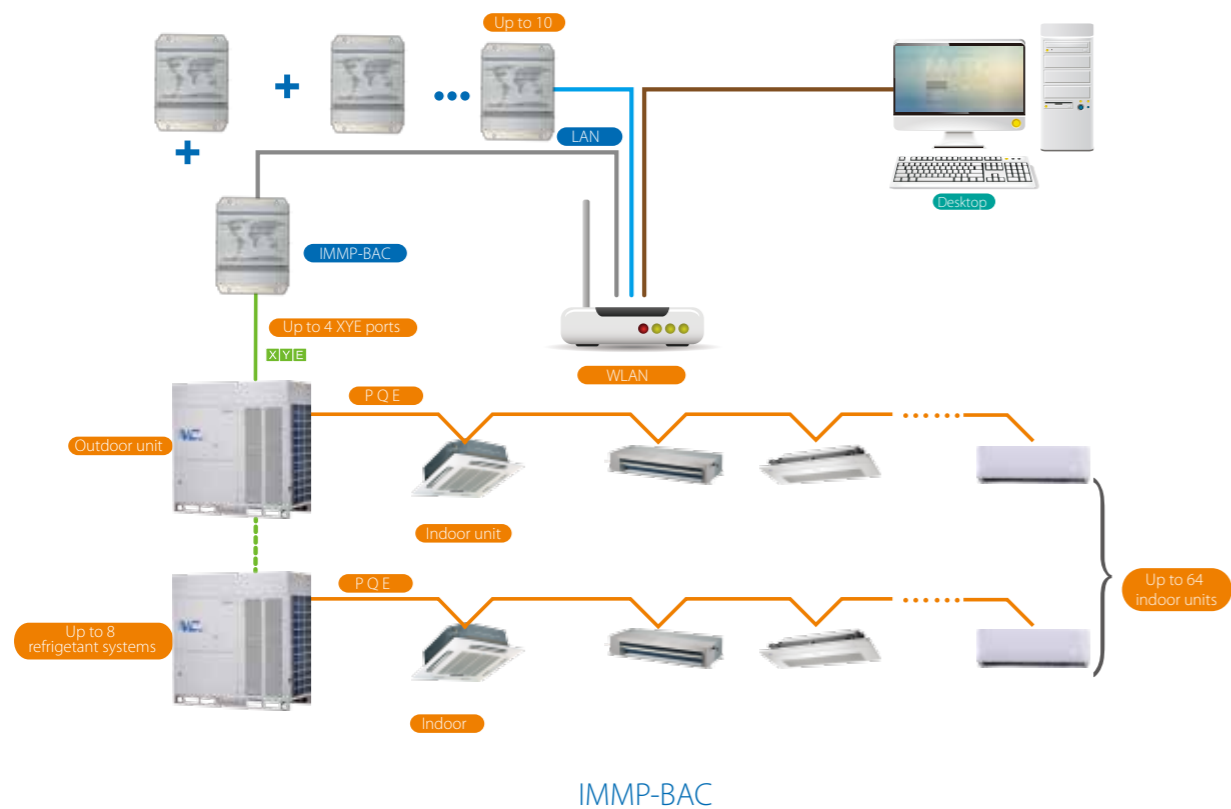

IMM-P-BAC

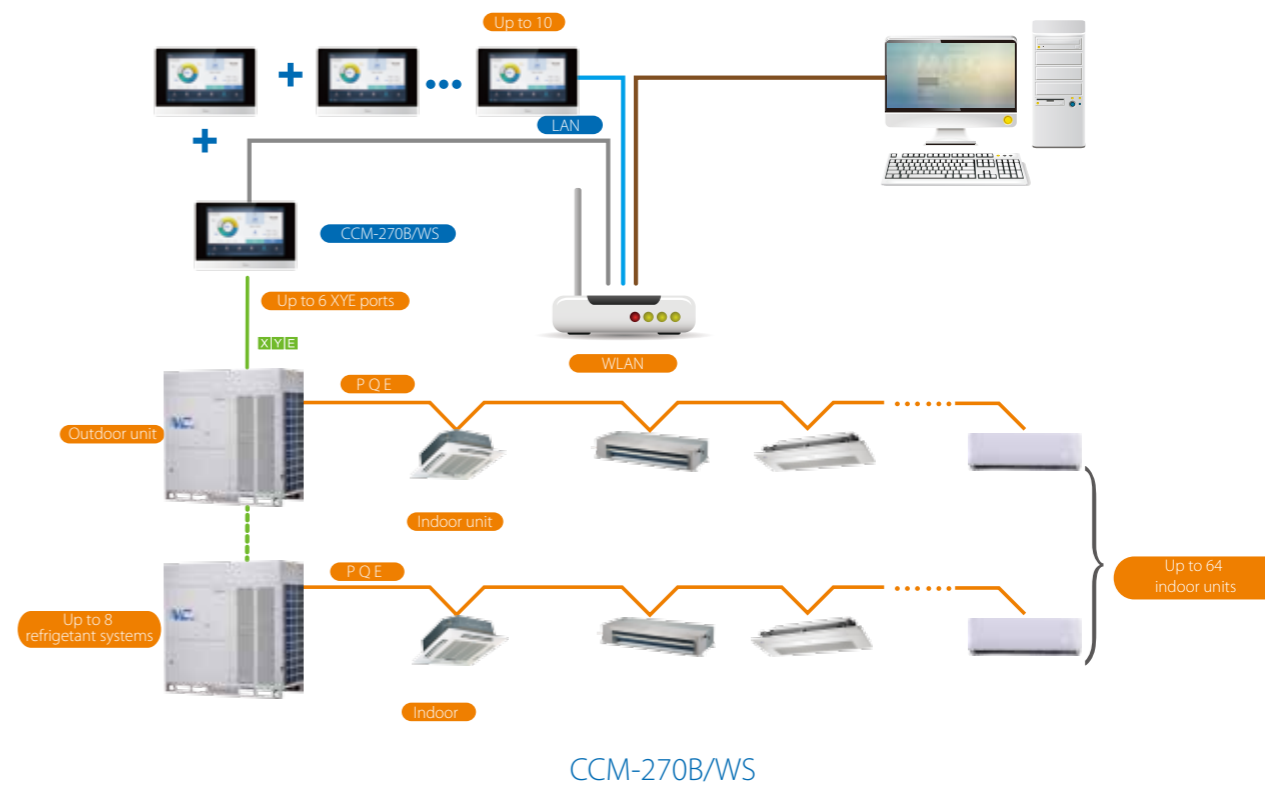

CCM-270B/WS

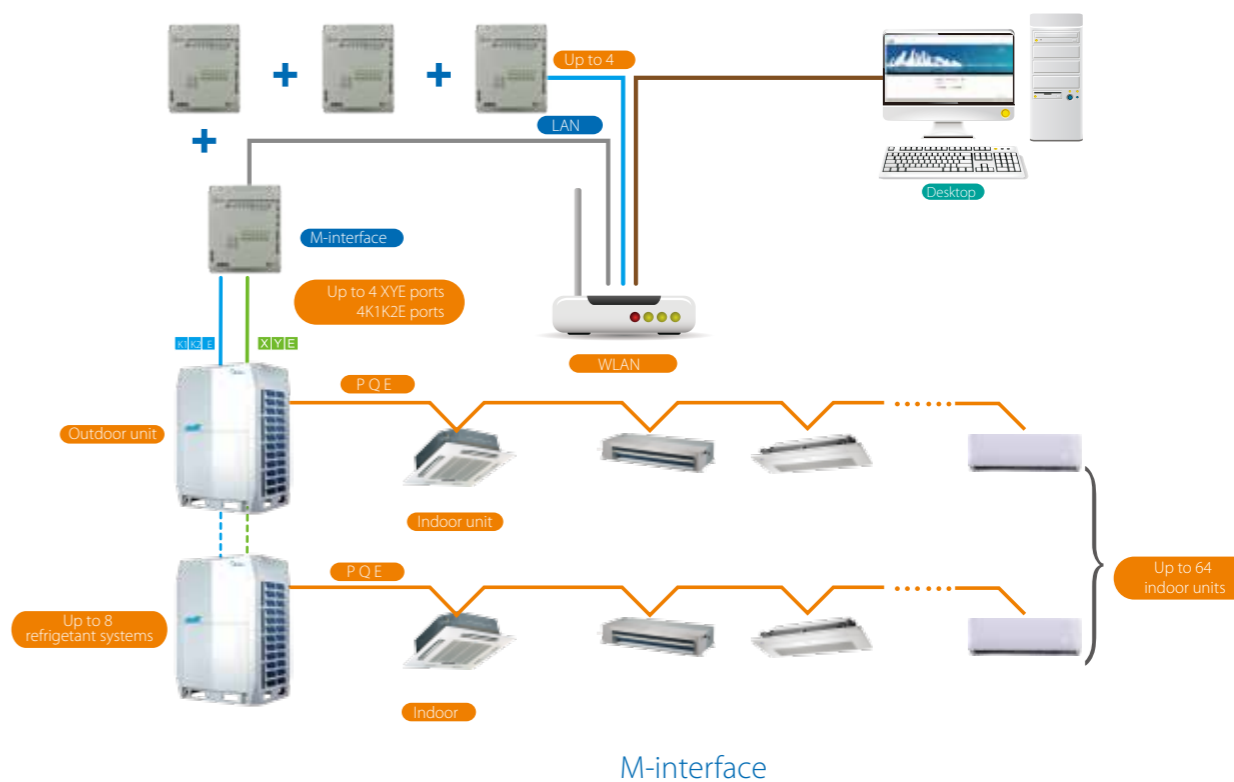

M-interface

BMS Gateway

Monitoring and control of Midea's VRF air conditioners can be integrated into building management systems, enabling air conditioning to be monitored alongside lighting, power, fire, access and security systems. Midea's gateway devices provide full compatibility with the leading BMS protocols: BACnet, LonWorks, Modbus and KNX.




Full Integration

The Bacnet Gateway allows Midea VRF systems to be monitored and controlled alongside other building management technology that use the BACnet protocol such as access control, fire detection and lighting systems.

Network Flexibility

The gateway can be connected to master outdoor units' XYE or K1K2E ports directly.

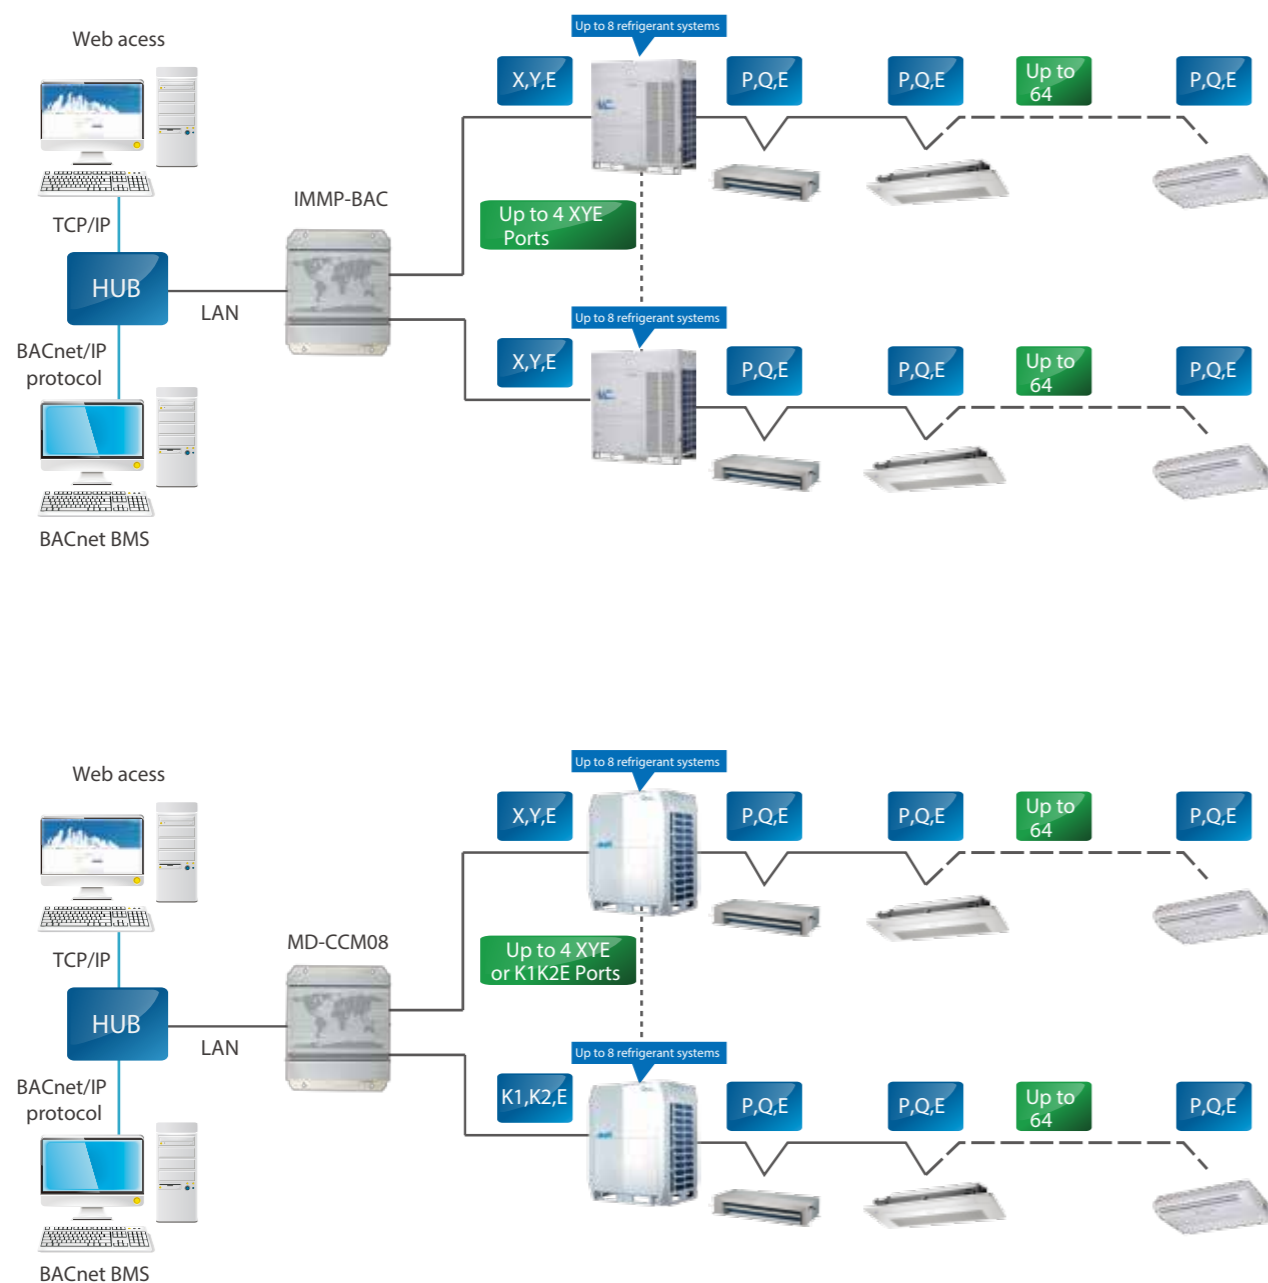

Features


Model		IMMP-BAC	MD-CCM08
Max. number of devices (include indoor and outdoor units)		256	256
Max. number of refrigerant systems		32	32
Control	On / Off	●	●
	Mode selection	●	●
	Temperature setting	●	●
	Fan speed	●	●
	Energy management	●	● (Remote controller limit)
Indoor unit monitoring	Room temperature display	●	●
	Error status	●	●
	Error alarms	●	—
Outdoor unit monitoring	Operating mode	●	●
	Outdoor ambient temperature	●	●
	Fan speed	●	●
	Compressor operating frequency	●	—
	Discharge temperature	●	—
	System pressure	●	—
	Error status	●	●
	Error alarms	●	—
	LAN access	●	●
BTL certification	●	●	
Compatibility	Siemens	APOGEE	
	Trane	TRACER	
	Honeywell	ALERTON	
	Schneider	Andover Continuum	
	Johnson Controls	METASYS	
Dimensions (HxWxD)(mm)		319x251x61	
Power supply		1 phase, 100-240V, 50/60Hz	
Outdoor unit series		VC pro/V4+(10-12HP) ODU	V5X/V4+R/V4+(except for 10-12HP)/V4+W/Mini VRF ODU

Full Integration



The LonWorks Gateway allows Midea VRF systems to be monitored and controlled alongside other building management technology on the LonWorks platform such as security, fire safety and lighting systems.

Network Flexibility

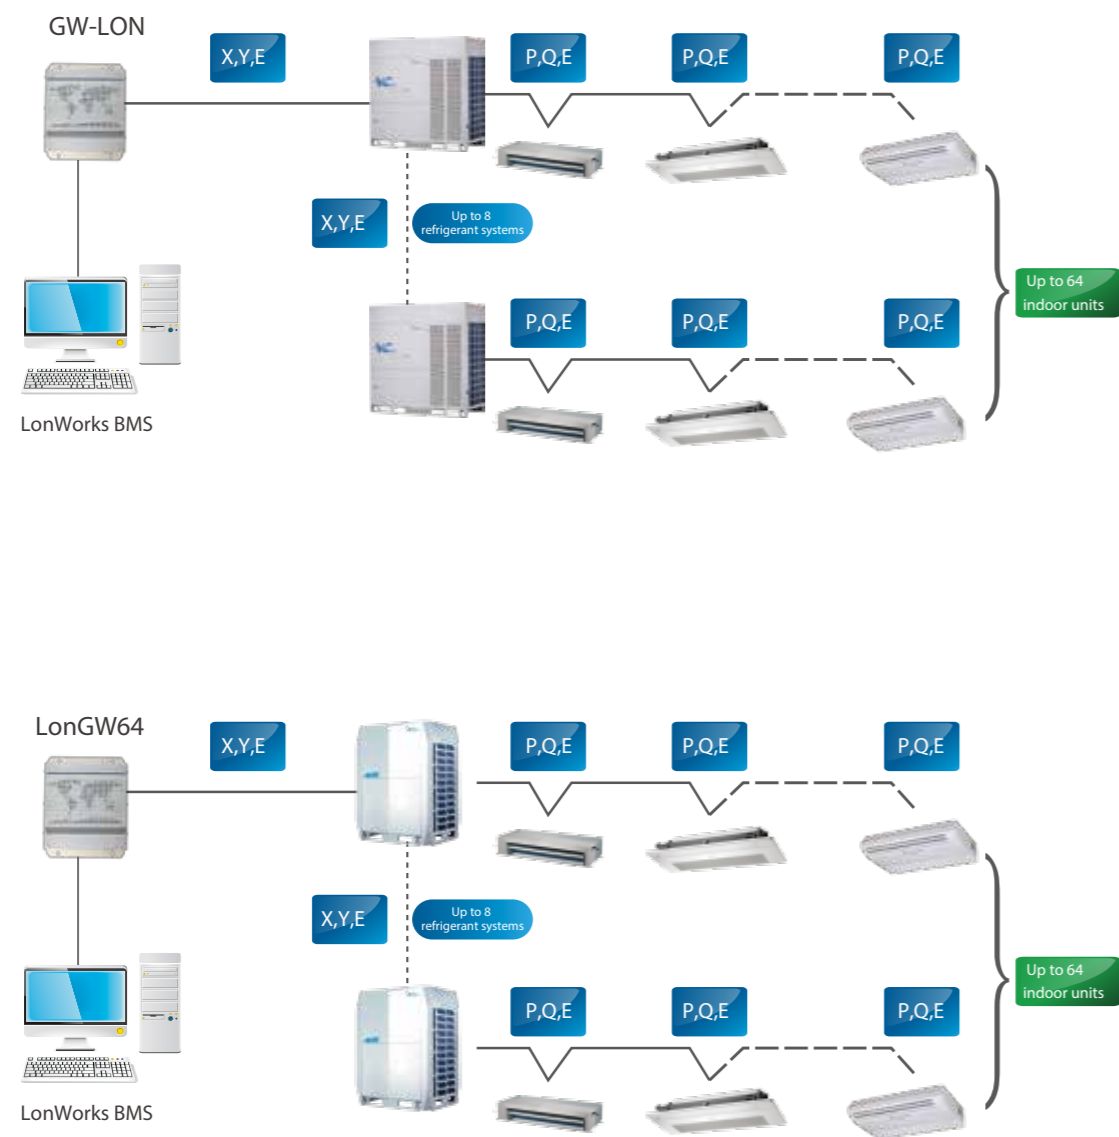The gateway can be connected to master outdoor units' X,Y,E port directly.



Features


Model		 GW-LON	 LonGW64
Max. number of indoor units		64	64
Max. number of refrigerant systems		8	8
Control	Mode selection	●	●
	Temperature setting	●	●
	Fan speed	●	●
	Group shut down	●	●
	On / Off	●	●
Indoor unit monitoring	Operating mode	●	●
	Set temperature	●	●
	Fan speed	●	●
	Online status	●	●
	Operating status	●	●
	Room temperature	●	●
	Error status	●	●
Outdoor unit monitoring	Error status	●	—
Dimensions (HxWxD)(mm)		319x251x61	
Power supply		1 phase, 100-240V, 50/60Hz	
Outdoor unit series		VC pro/V4+(10-12HP) ODU	V5X/V4+R/V4+(except for 10-12HP)/V4+W/Mini VRF ODU

Full Integration

The Modbus Gateway enables seamless connection of Midea VRF systems with building management systems built on the Modbus communication protocol.

Network Flexibility

The gateway can be connected to master outdoor units' XYE or K1K2E ports directly.

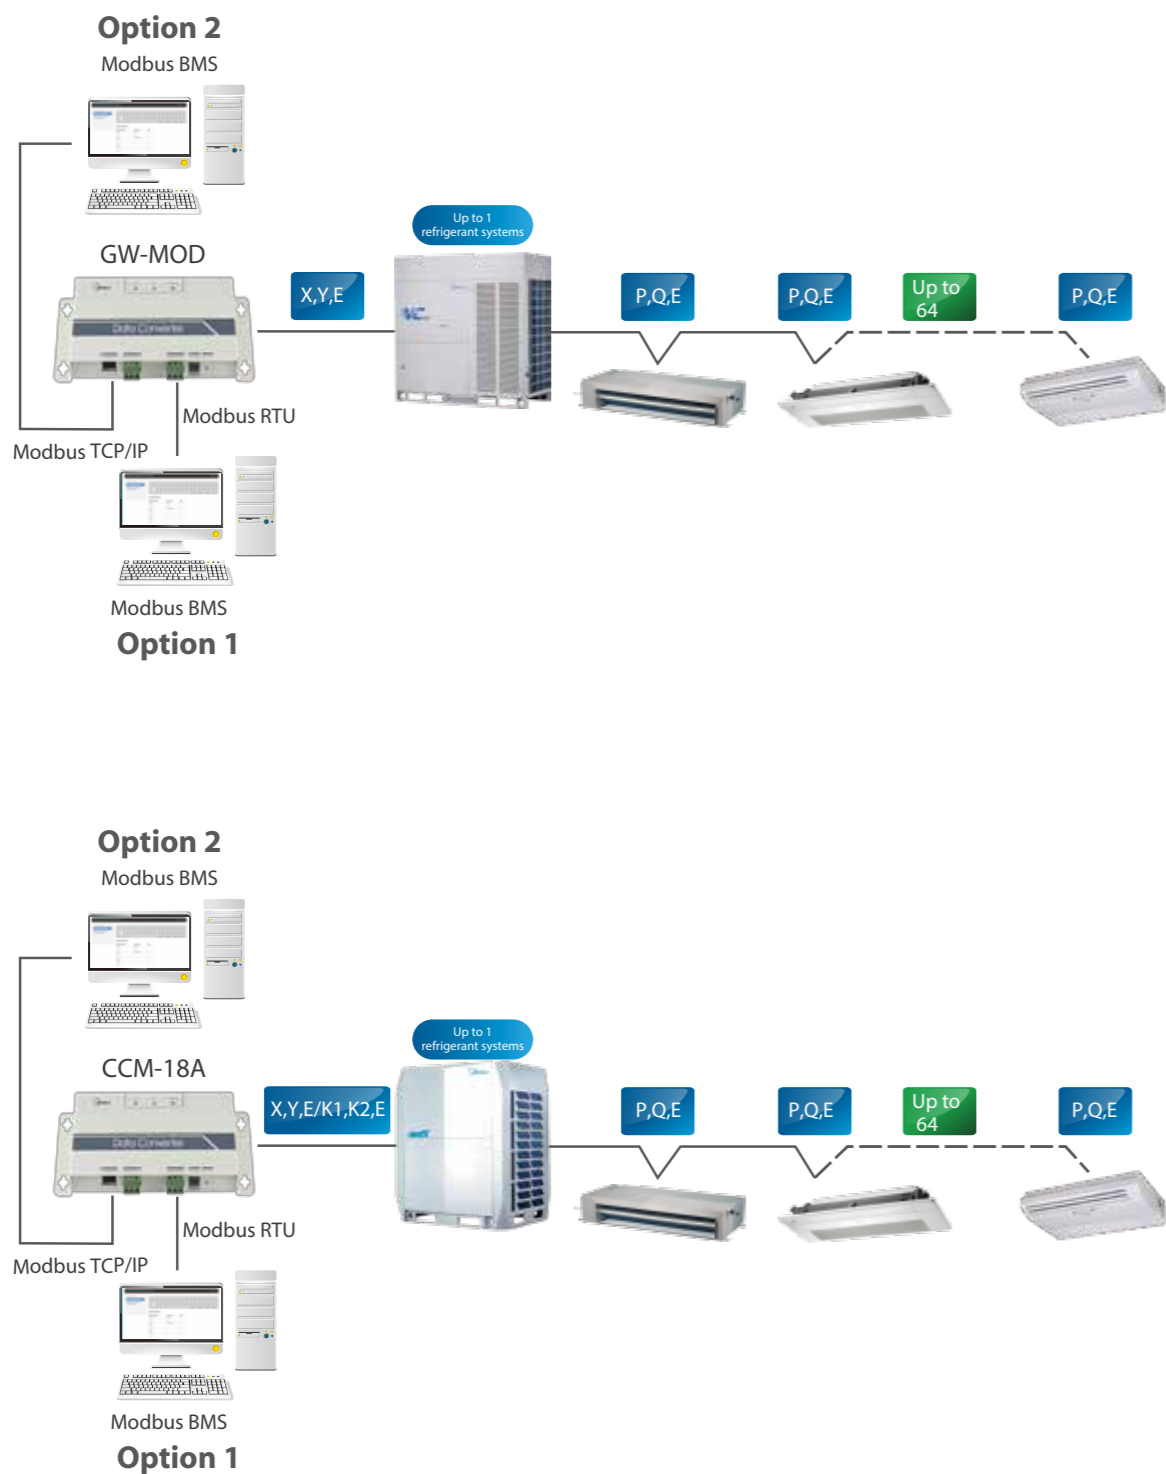

Features


Model				
Max. number of indoor units		64	64	16
Max. number of refrigerant systems		1	1	1
Control	On / Off	●	●	●
	Mode selection	●	●	●
	Temperature setting	●	●	●
	Fan speed	●	●	●
	Group on/off	●	●	●
Indoor unit monitoring	Online status	●	●	●
	Room temperature	●	●	●
	Error status	●	●	●
	Operating mode	●	●	●
Outdoor unit monitoring	Operating mode	●	●	—
	Lock status	●	●	—
	Fan speed	●	●	—
	Set temperature	●	●	—
	Outdoor ambient temperature	●	●	—
	Error status	●	●	—
LAN access		●	●	●
Dimensions (HxWxD)(mm)		187x115x28		
Power supply		1 phase, 100-240V, 50/60Hz		
Outdoor unit series		VC pro/V4+I(10-12HP) ODU	V5X/V4+R/V4+I(except for 10-12HP)/V4+W/Mini VRF ODU	

Full Integration

The KNX Gateway enables full integration of Midea VRF systems with home and building management systems built on the KNX network communications protocol. KNX is the only global standard for housing and building control, and has been adopted by 70% of Europe's smart home market.

Network Flexibility

The gateway can be connected to indoor units' XYE or D1D2E ports directly.

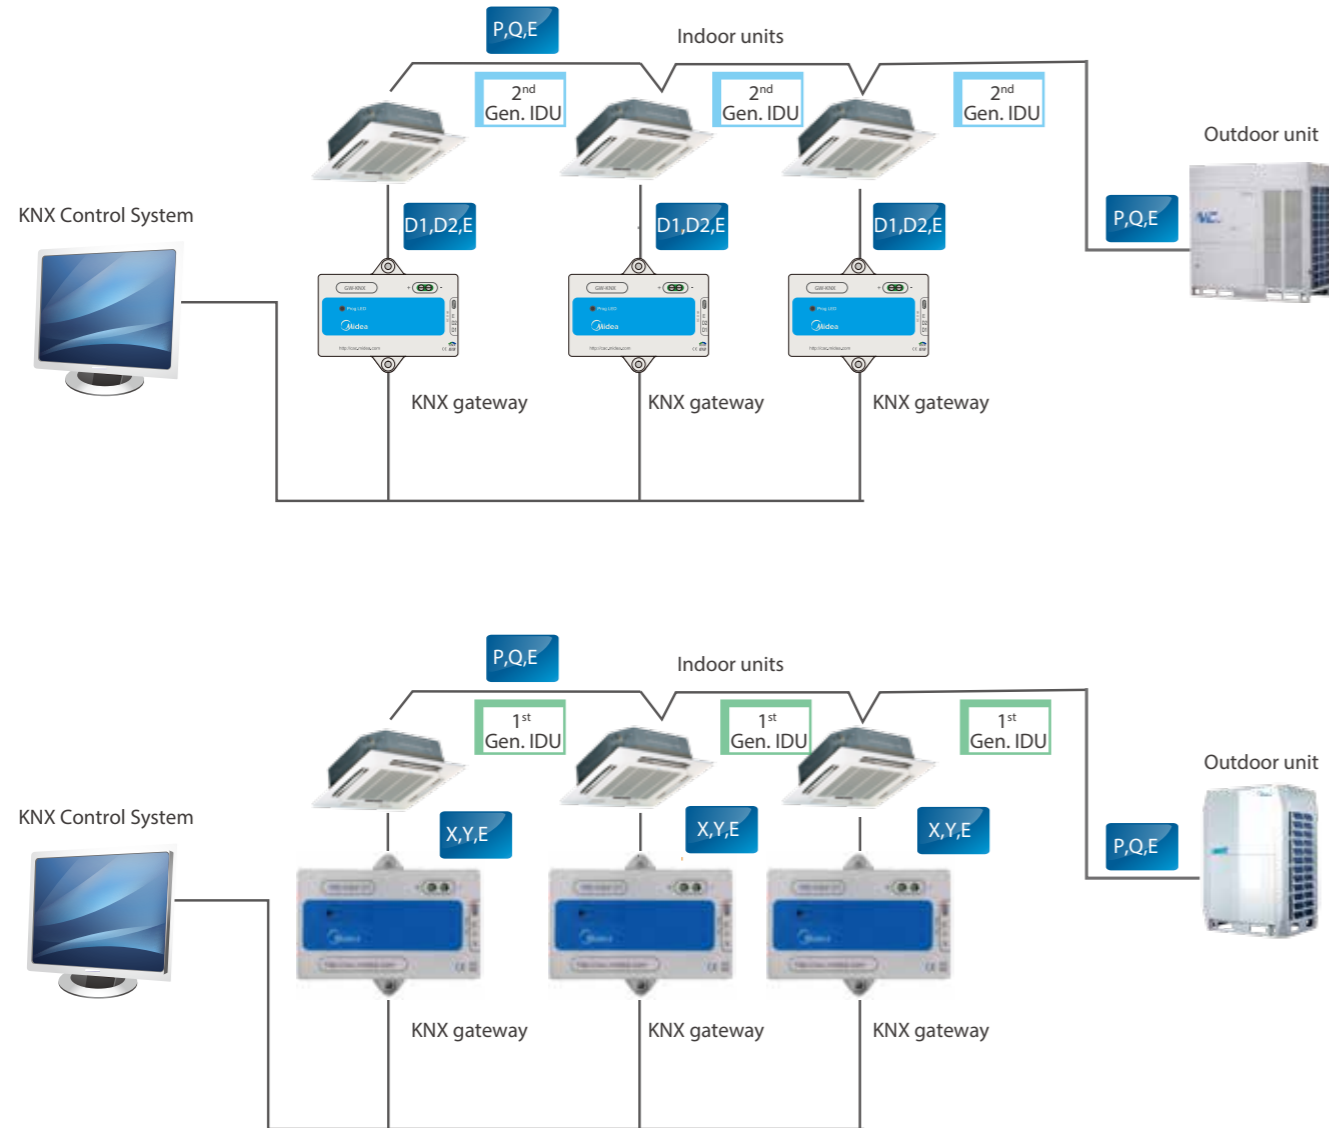

Features

Model		 MD-KNX	 GW-KNX
Max. number of indoor units		1	1
Control	On / Off	●	●
	Mode selection	●	●
	Temperature setting	● (1°C steps)	● (1°C steps)
	7-speed fan control	●	● (3-speed)
	Swing	●	●
Monitoring	On / Off	●	●
	Mode selection	●	●
	Temperature setting	●	●
	Fan speed	●	●
	Swing	●	●
	Room temperature	●	●
	Error alarm	●	●
Dimensions (HxWxD)(mm)		85x51x16	85x51x16
Power supply		29VDC (KNX bus supply)	29VDC (KNX bus supply)
Indoor unit series		2 nd generation DC IDU	1 st generation DC IDU







Hotel Key Card Interface Modules

Full Integration

The Hotel Key Card Interface Modules enable power supply to indoor units to be integrated with hotel key card power supply management systems, which are designed to save energy by only running appliances whilst guests are present in their room.

Features

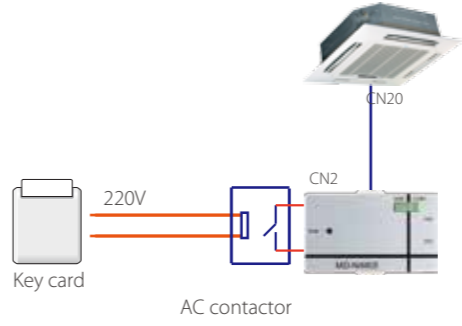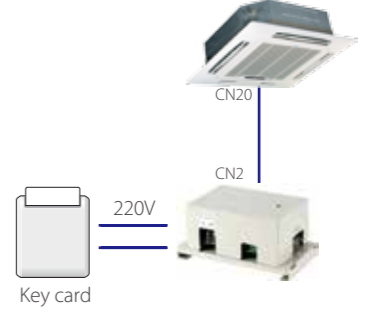Model	MD-NIM05/E	MD-NIM05B/E
Appearance		
Network flexibility		
Auto restart	●	●
Compatibility	Remote and wired controller	Remote and wired controller
Dimensions (HxWxD) (mm)	15.5x86x72.8	87x150x70
Power supply	5V DC (Supplied by indoor unit)	1 phase, 100-240V, 50/60Hz
Indoor unit series	all series	

Note : The Hotel Key Card Interface Modules only compatible while using the infrared communication ports of wired Controllers.



Infrared Sensor Controller

Full Integration

Using infrared sensors to detect movement, the MD-NIM09 Infrared Sensor Controller automatically turns indoor units on or off upon sensing that the room is occupied or unoccupied. Suitable for hotels, offices, conference rooms and residences, the Infrared Sensor Controller ensures climate control whilst minimizing energy consumption.

Features

Model	MD-NIM09
Appearance	
Network flexibility	
Dimensions (HxWxD)(mm)	Sensor 46x30x25.6, Control box 86x72.8x15.5
Power supply	5V DC (Supplied by indoor unit)
Indoor unit series	all series


Note : The Hotel Key Card Interface Modules only compatible while using the infrared communication ports of wired Controllers.

Diagnosis Software

Monitor and Diagnose

Midea's VRF Diagnosis Software tool is used to monitor VRF systems and diagnose system errors. System settings and operating parameters can be accessed easily and data logs can be reviewed for fault prevention purposes.

Features

Model		 MCAC-DIAG-B
Max. number of indoor units		64
Max. number of refrigerant systems		1
Control	Mode selection	●
	Temperature setting	●
	Fan speed	●
Outdoor unit monitoring	Operating mode	●
	Capacity	●
	Compressor operating frequency	●
	Operating current	●
	Error status	●
	Temperatures	T3,T4,Tp (See note 1)
	Valve statuses	SV4, SV5, SV6, ST1 (See note 2)
Indoor unit monitoring	Operating mode	●
	Capacity	●
	Fan speed	●
	Address	●
	Temperatures	T1, T2, T2B, TS (See note 3)
	EXV position	●
Error codes		●
Troubleshooting		●
Data logs		●
Diagrams		System schematic, refrigerant flow diagram, parameter chart
Languages supported		English
Outdoor unit series		V5XODU

Notes:

1. Heat exchanger temperature, outdoor ambient temperature, discharge temperature.

2. Oil return valve, defrosting valve, EXV bypass valve, four-way valve.

3. Indoor ambient temperature, indoor heat exchanger mid-point temperature, indoor heat exchanger outlet temperature, set temperature.

Expert Diagnosis

Midea's VRF Diagnosis Software is specially designed to allow after-sales engineers, to understand the operating status of the system at a glance.




Use-friendly Interface

A stylish and simple interface with rich graphical representations makes diagnosing system issues quick and convenient.



Diagrams

A system schematic, refrigerant flow diagram and parameter chart can be generated to provide a graphical interpretation of the system status.

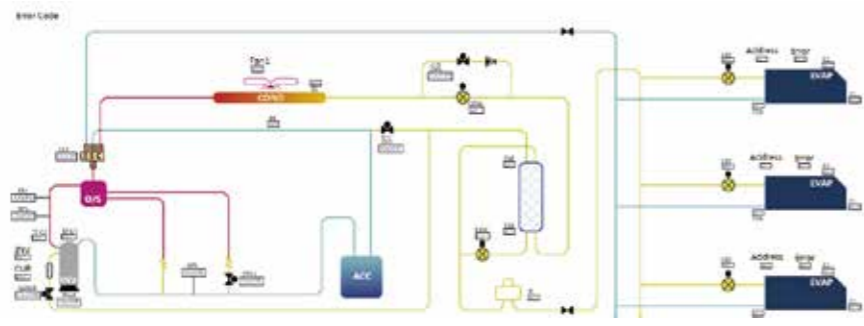

Parameter Querying

Access all the system parameters easily.



Data Logs

Data logs including operating records and error reports are saved by the software which is useful for discovering system issues.



Wiring Schematic





Indoor Unit Online Kit



Prevent Unnecessary Shutdown

If the power supply for one indoor unit fails, the indoor unit will still remain online and the whole VRF system will not stop. The IDU online kit will keep the indoor unit online, thus keeping the other indoor units of the system working normally and prevent unnecessary shutdown.

Features

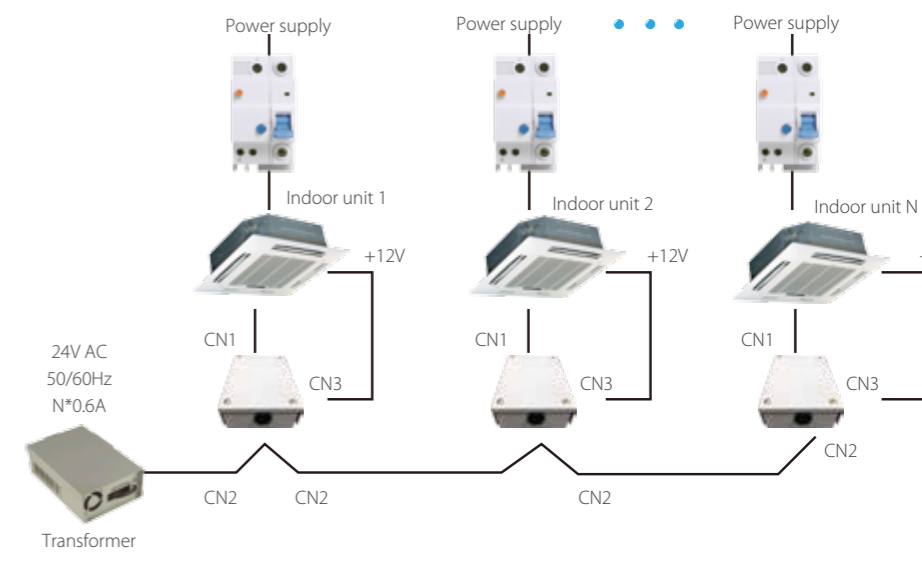


Model	 <p>MCAC-PIDU</p>
Network flexibility	
Dimensions (HxWxD)(mm)	146.6 x 100.6x 46.8
Power supply	24V AC
Indoor unit series	2 nd generation DC IDU

Remote Alarm Controller

Simple Design

KJR-32B is specially designed for engineering applications. It does not display the ODU's working parameters parameters. However, it can connect to the alarm device when the ODU is working abnormally, in which case the RUN light will flash.

Features


Model	 KJR-32B
Max. number of refrigerant systems	8
Wiring flexibility	<p>Wiring connection 1:</p>  <p>Wiring connection 2:</p> 
Dimensions (HxWxD)(mm)	85X150X70
Power supply	198-242V (50/60Hz)
Outdoor unit series	V5X/V4+R/V4+(except for 10-12HP)/V4+W ODU

Network Electricity Distribution Module

Simple Design

MD-NIM10 is designed specifically for Mini VRF. It provides the OAE ports and Mini VRF can be connected to the IMM network control system to realize network electricity distribution.

Features


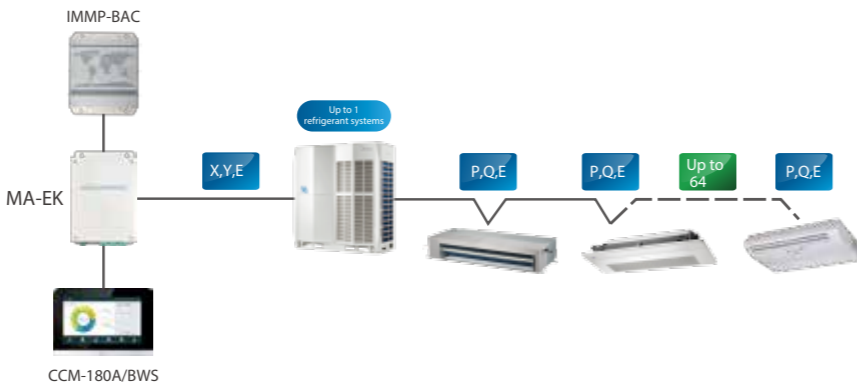
Model	 MD-NIM10
Max. number of outdoor unit	1
Wiring flexibility	
Dimensions (HxWxD)(mm)	85X150X70
Power supply	198-242V (50/60Hz)
Outdoor unit series	Mini VRF ODU

XYE Extension Kit

Simple Design

The MA-EK is used to extend the XYE port of outdoor unit as the 2-way one which can connect to 2 centralized controllers or gateways.

Features

Model	 MA-EK
Max. number of refrigerant systems	8
Wiring flexibility	
Dimensions (HxWxD)(mm)	128X225X28
Power supply	12V DC
Outdoor unit series	all series

Indoor Unit Group Controller

Simple Design

The KJR-150A is an indoor group controller designed specifically for 1st generation AC/DC indoor units. It can connect up to 16 indoor units through indoor unit XYE ports. With a display panel connected to KJR-150A, signals from a wired controller and remote controller can control a group of indoor units simultaneously. All indoor units will run at the same setting parameters. You can also control indoor units separately in each room by remote controller. The indoor units will run as previously set.

Features

Model	 KJR-150A
Max. number of outdoor unit	1
Wiring flexibility	
Dimensions (HxWxD)(mm)	85X150X70
Power supply	198-242V (50/60Hz)
Indoor unit series	1 st generation AC/DC IDU

VRF AHU Control Box

High Efficiency

AHU Control Box facilitates raising the EER/COP of the complete AHU system.




Wide Capacity Range

Four Control Box can be used in parallel, giving an overall capacity range of 3.2HP to 80HP.




Compatible with VRF Systems


AHU Control Box are compatible with Midea VRF outdoor units and can be used together with all types of Midea VRF indoor units.

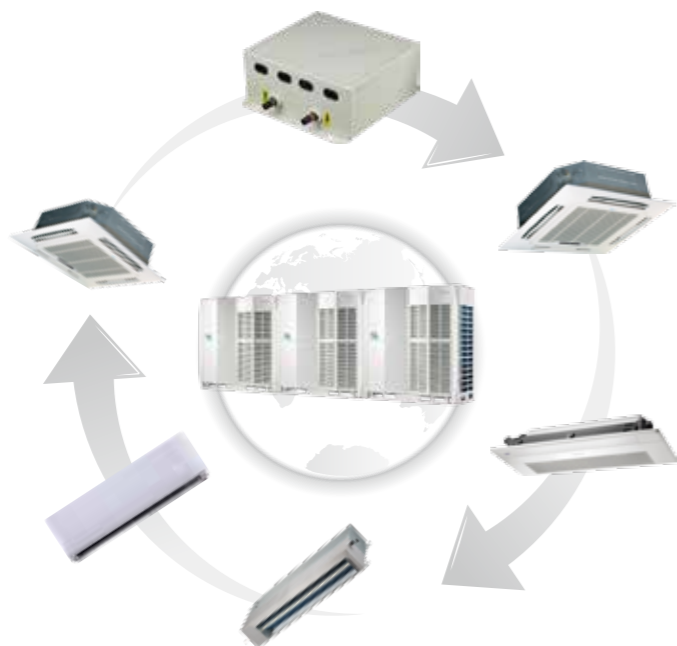

Single AHU Control Box Connection

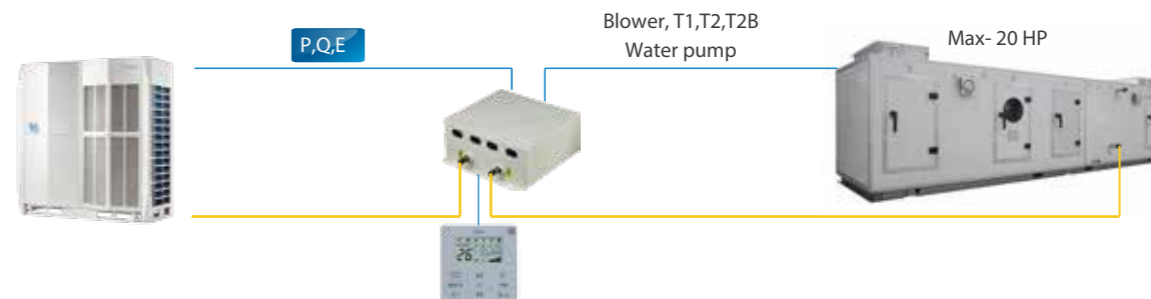

Multi AHU Control Boxes Connection

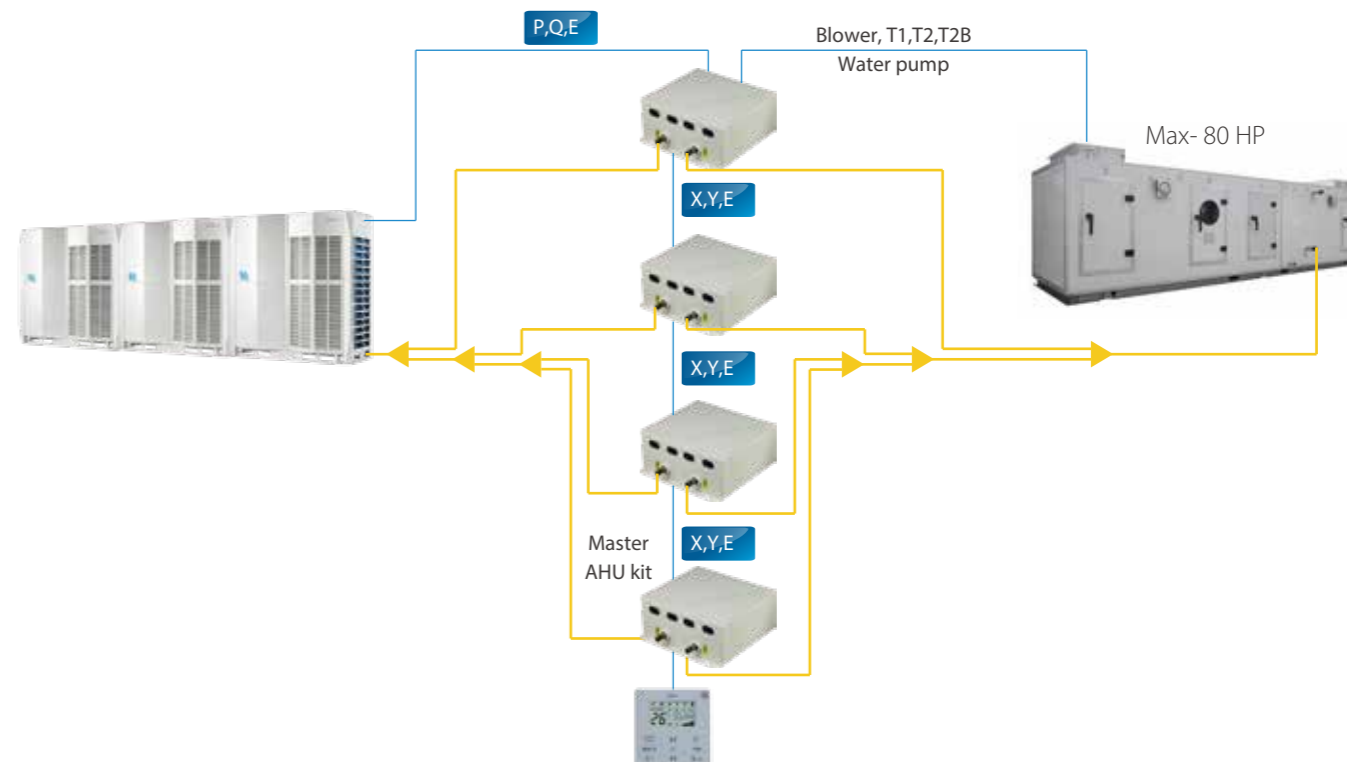

Specifications

Model		AHUKZ-01B	AHUKZ-02B	AHUKZ-03B
Capacity	HP	3.2-6	8-12	14-20
Power supply		1 phase, 220-240V, 50Hz; 1 phase, 208-230V, 60Hz		
Refrigerant		R410A		
Pipe connections (inlet and outlet)	mm	Φ8	Φ12.7	Φ15.9
Net dimensions (WxHxD)	mm	350x150x375		
Packed dimensions (WxHxD)	mm	420x240x490		
Net weight	kg	8.4	8.7	8.9
Gross weight	kg	11.4	11.7	11.9
Operating modes		Cooling, heating and fan only		
Standard controller		Wired controller		
Optional controller		Wireless remote controller; SIEMENS controller		

Heat Recovery Ventilator

Fan Motor Options

AC and DC fan versions available.

Enhanced Efficiency


The Midea heat recovery ventilator (HRV) can greatly reduce energy losses and room temperature fluctuations caused by the ventilation process. The Midea HRV's strong performance is a result of the advanced technology incorporated into its design. The heat exchanger core is made of specially treated paper which gives enhanced temperature and humidity control. Temperature exchange efficiency is over 65% and enthalpy exchange efficiency is 50-65%.



HRV-200
HRV-300
HRV-400



HRV-500
HRV-800
HRV-1000
HRV-1500
HRV-2000

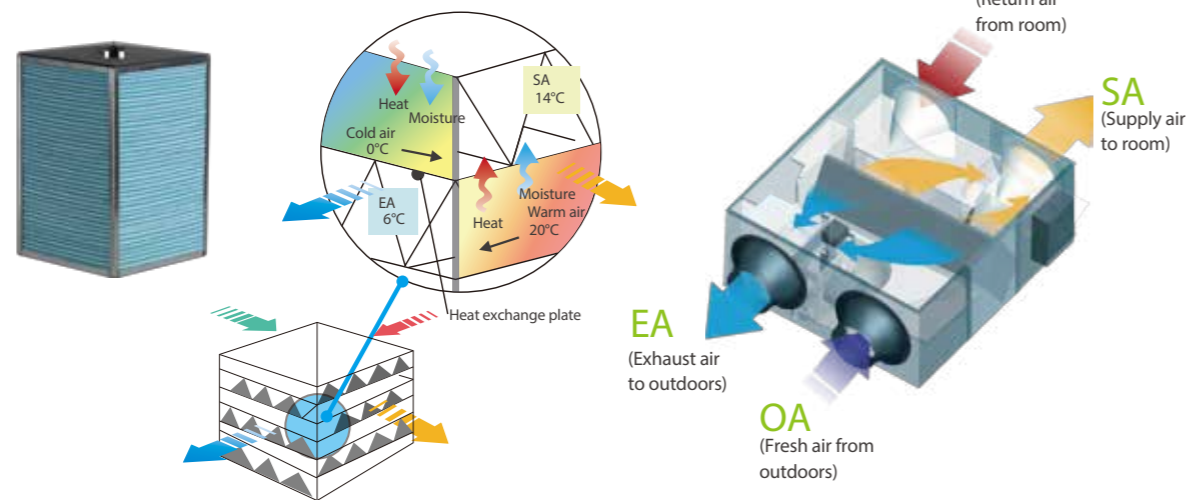


Low Noise

Soundproofing is used to guarantee quiet operation.

Flexibility

Heights starting from as little as 264mm and weights from as little as 23kg mean that the Midea HRV can be easily installed even where space is limited.

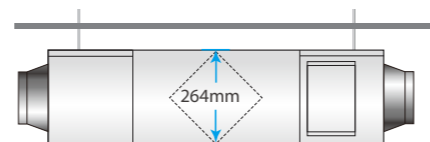

Multiple Modes

Heat exchange mode

The flows of incoming and outgoing air pass close to each other, allowing heat transfer between the two channels. During summer, incoming air is cooled by the indoor air being exhausted and in winter, incoming air is warmed.

Bypass mode

In mild climates or seasons, where temperature and humidity differences between indoors and outdoors are small, the HRV can work as a conventional ventilation fan. In standard bypass mode the supply and exhaust fans run at the same speed.

Air supply mode


Air supply mode is where the supply fan is set to run faster than the exhaust fan, which is useful in mild climate installations with high fresh air ventilation requirements.

Exhaust mode

Exhaust mode is where the exhaust fan is set to run faster than the supply fan, which is useful in mild climate installations with large amounts of exhaust air to be expelled.

Auto mode

The controller chooses heat exchange mode or bypass mode according to the temperature difference between outdoors and indoors. Both fans are set to run at low speed.

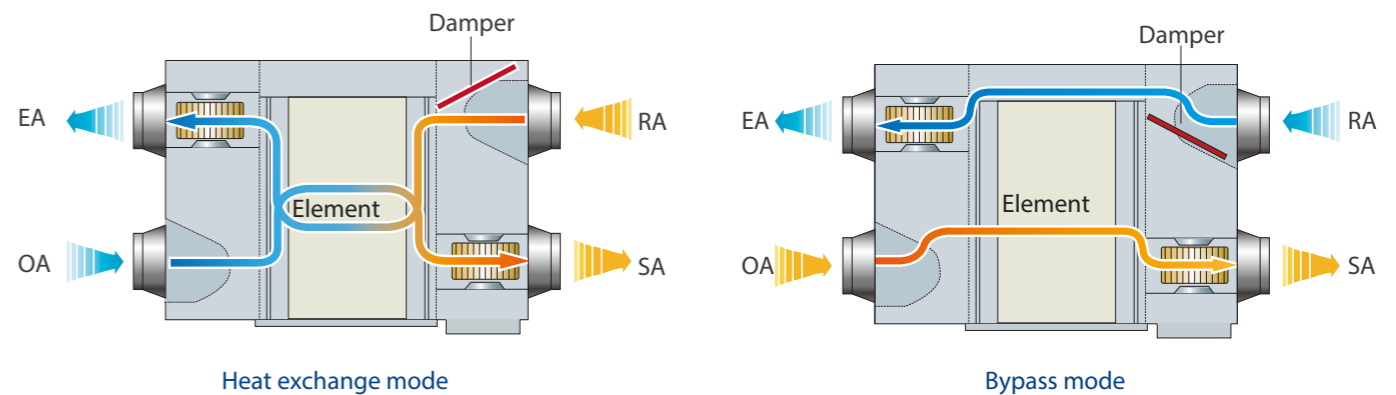

HRV Wired Controller

KJR-27B is individually designed for HRV—Heat Recovery Ventilator. The HRV can work in the following modes: exhaust, air supply, bypass, heat exchange, and auto.



KJR-27B

AC Series

Model		HRV-200	HRV-300	HRV-400	HRV-500
Power supply	V/Ph/Hz	220-240/1/50		220-240/1/50 & 220/1/60	
Cooling temp. exchange efficiency (H/M/L)	%	55/55/60	55/55/60	55/55/60	55/55/60
Cooling enthalpy exchange efficiency (H/M/L)	%	50/50/55	50/50/55	50/50/55	50/50/55
Heating temp. exchange efficiency (H/M/L)	%	60/60/65	60/60/65	60/60/65	65/65/70
Heating enthalpy exchange efficiency (H/M/L)	%	55/55/60	55/55/60	60/60/65	60/60/65
Sound pressure level in heat exchange mode (H/M/L)	dB(A)	27/26/20	30/29/23	32/31/25	35/34/28
Sound pressure level in bypass mode (H/M/L)	dB(A)	28/27/22	31/30/25	33/32/27	36/35/30
Airflow rate (H/M/L)	m ³ /h	200/200/150	300/300/225	400/400/300	500/500/375
External static pressure (H/M/L)	Pa	75/58/35	75/60/40	80/65/43	80/68/45
Motor type		AC			
Duct diameter	mm	Φ144	Φ144	Φ144	Φ194
Net dimensions (WxDxH)	mm	866x655x264	944x722x270	944x927x270	1038x1026x270
Packed dimensions (WxDxH)	mm	960x770x445	1020x810x452	1020x1020x452	1120x1120x452
Net weight	kg	23	26	31	41
Gross weight	kg	40	44	52	64
Operating temperature range	°C	-7 to 43 DB, RH 80% or lower			

Model		HRV-800	HRV-1000	HRV-1500	HRV-2000
Power supply	V/Ph/Hz	220-240/1/50 & 220/1/60		380-415/3/50 & 220/3/60	
Cooling temp. exchange efficiency (H/M/L)	%	55/55/60	55/55/60	55	55
Cooling enthalpy exchange efficiency (H/M/L)	%	50/50/55	50/50/55	50	50
Heating temp. exchange efficiency (H/M/L)	%	65/65/70	65/65/70	65	65
Heating enthalpy exchange efficiency (H/M/L)	%	60/60/65	60/60/65	60	60
Sound pressure level in heat exchange mode (H/M/L)	dB(A)	39/38/32	40/39/33	51	53
Sound pressure level in bypass mode (H/M/L)	dB(A)	40/39/34	41/40/35	52	54
Airflow rate (H/M/L)	m ³ /h	800/800/600	1000/1000/750	1500	2000
External static pressure (H/M/L)	Pa	100/82/54	100/85/58	160	170
Motor type		AC			
Duct dimensions	mm	Φ242	Φ242	346x326	346x326
Net dimensions (WxDxH)	mm	1286x1006x388	1286x1256x388	1600x1270x540	1650x1470x540
Packed dimensions (WxDxH)	mm	1380x1100x573	1400x1370x573	1710x1410x720	1760x1610x720
Net weight	kg	62	79	163	182
Gross weight	kg	88	110	224	247
Operating temperature range	°C	-7 to 43 DB, RH 80% or lower			

Note:

- Models HRV-200 to HRV-1000 each have 3 airflow settings; the airflow rates of the HRV-1500 and HRV-2000 are not adjustable.
- Sound level is measured 1.4m below the center of the unit in a semi-anechoic chamber.
- Efficiency is measured under the following conditions:
Cooling: exhaust air temp 27°C DB, 19.5°C WB; fresh air temp. 35°C DB, 28°C WB.
Heating: exhaust air temp 21°C DB, 13°C WB; fresh air temp. 5°C DB, 2°C WB.

Specifications

DC Series

Model		HRV-D200(A)	HRV-D300(A)	HRV-D400(A)	HRV-D500(A)
Power supply	V/Ph/Hz	220-240/1/50(60)			
Power input	kW	0.07	0.1	0.11	0.15
Nominal temperature efficiency	%	81.1	75.5	77.7	80.6
Nominal enthalpy efficiency	%	77.5	72.1	73.5	74
Current	A	0.64	0.84	0.97	1.2
Indoor external static pressure (Hi)	Pa	100	90	100	90
Nominal air flow	m ³ /h	200	300	400	500
Sound pressure level	dB(A)	45	48	48	50
Net dimension (WxDxH)	mm	1195x801x272	1195x914x272	1276x1204x272	1311x1106x390
Packing size (WxDxH)	mm	1275x880x420	1275x994x420	1360x1284x420	1390x1244x540
Net/Gross weight	kg	46.5/63.5	56.5/75.5	71.5/91.5	76/98
Fresh air	Fresh Air Diameter	mm	Φ144	Φ144	Φ198
	Air drop	Pa	52	179	218
Operating temperature range	°C	-7 to 43 DB, RH 80% or lower			






Model		HRV-D800(A)	HRV-D1000(A)	HRV-D1500(A)	HRV-D2000(A)
Power supply	V/Ph/Hz	220-240/1/50(60)			
Power input	kW	0.32	0.38	0.68	0.95
Nominal temperature efficiency	%	2.4	2.9	3.8	5.7
Nominal enthalpy efficiency	%	78.7	82.8	75.5	77.2
Current	A	72.3	76	69.4	74.7
Indoor external static pressure (Hi)	Pa	140	160	180	200
Nominal air flow	m ³ /h	800	1000	1500	2000
Sound pressure level	dB(A)	55	54	69	70
Net dimension (WxDxH)	mm	1311x1286x390	1311x1526x390	1740x1375x615	1811x1575x685
Packing size (WxDxH)	mm	1390x1424x540	1390x1670x540	1830x1520x770	1900x1720x845
Net/Gross weight	kg	80/104	90/112	181.5/213	208.5/245
Fresh air	Fresh Air Diameter	mm	Φ244	Φ244	346x326
	Air drop	Pa	357	384	253
Operating temperature range	°C	-7 to 43 DB, RH 80% or lower			

Note:



- All models each have 3 airflow setting.
- Sound level is measured 1.4m below the center of the unit in a semi-anechoic chamber.
- The parameters in the above table are measured at high speed.

Branch Joints

For Heat Pump Outdoor Units

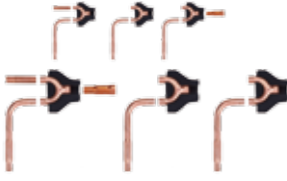
Type	Appearance	Model	PackedDimensions mm	GrossWeight kg	Note
Branch joints for VC Pro VRF		FQZHW-02N1E	255x150x185	2.0	Connecting two outdoor units
		FQZHW-03N1E	345x160x285	4.3	Connecting three outdoor units
Branch joints for VSX & V4+W VRF		FQZHW-02N1D	255x150x185	1.5	Connecting two outdoor units
		FQZHW-03N1D	345x160x285	3.4	Connecting three outdoor units
		FQZHW-04N1D	475x165x300	4.8	Connecting four outdoor units

For Heat Recovery Outdoor Units

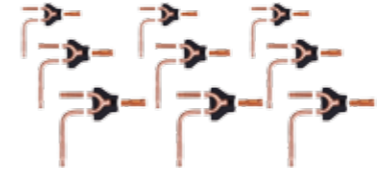Type	Appearance	Model	Packed Dimensions mm	GrossWeight kg	Note
Branch joints between outdoor unit		FQZHW-02SB	272x167x232	2.2	Connecting two outdoor units
		FQZHW-03SB	472x157x312	5.0	Connecting three outdoor units
		FQZHW-04SB	745x160x335	7.5	Connecting four outdoor units
Branch joints between MS and outdoor unit		FQZHN-01SB	257x127x107	0.8	
		FQZHN-02SB	287x137x107	0.9	
		FQZHN-03SB	297x167x177	1.4	
		FQZHN-04SB	372x197x187	2.3	
		FQZHN-05SB	432x222x227	3.3	





Branch Joints

For Indoor Units

Type	Appearance	Model	PackedDimensions mm	GrossWeight kg	Note
Branch joints for indoor units		FQZHN - 01D	290x105x100	0.4	/
		FQZHN - 02D	290x105x100	0.6	/
		FQZHN - 03D	310x130x125	0.9	/
		FQZHN - 04D	350x180x170	1.5	/
		FQZHN - 05D	365x195x215	1.9	/
		FQZHN - 06D	390x230x255	3.1	/
		FQZHN - 07D	390x230x255	3.4	/

Dimensions

Outdoor Branch Joints

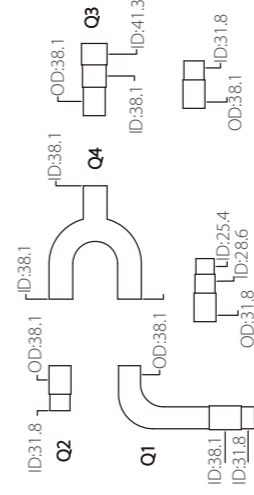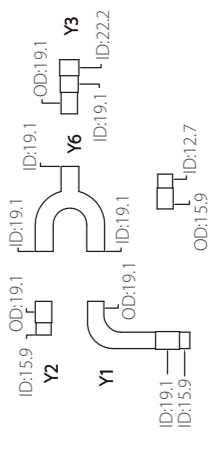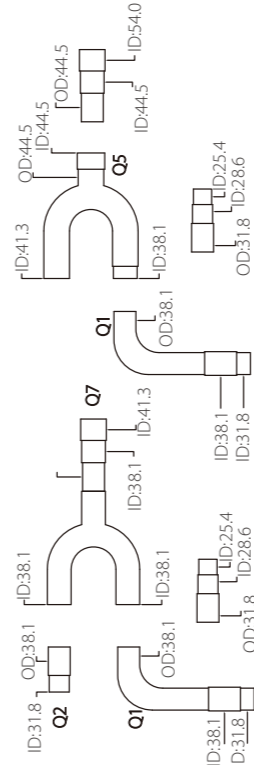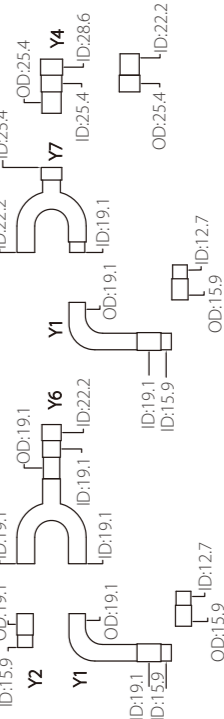Model	Gas side joints	Liquid side joints
FQZHW-02N1E		
FQZHW-03N1E		

Model	Gas side joints	Liquid side joints
FQZHW-02N1D		
FQZHW-03N1D		
FQZHW-04N1D		

Model	Low-pressure gas side joints	High-pressure gas side joints	Liquid side joints
FQZHW-02SB			
FQZHW-03SB			
FQZHW-04SB			

Model	Low-pressure gas side joints	High-pressure gas side joints	Liquid side joints
FQZHN-01SB			
FQZHN-02SB			
FQZHN-03SB			
FQZHN-04SB			
FQZHN-05SB			
FQZHN-06SB			
FQZHN-07SB			

Model	Gas side joints	Liquid side joints
FQZHN-01D		
FQZHN-02D		
FQZHN-03D		
FQZHN-04D		
FQZHN-05D		
FQZHN-06D		
FQZHN-07D		