

# Mid-Static Ducted

7K–24K BTU  
Multi-Zone Indoor

Controller not included. Controls sold separately.



ARUH12KUAS



ARUH18KUAS  
ARUH24KUAS

12 Year Compressor Warranty 1

Economy Minimum Heat Changeover Adjust Restart Dry Fresh Quiet Mode 24 Hour Sleep 2 Weekly 3 Cold Pump Down WI-FI CAPABLE 4

Sensor I/O 3rd Party Pump 16 Daisy

1 Applies when properly registered AND installed by a Fujitsu AIRSTAGE Elite Contractor in a residence. See full warranty for details.

2 Available only with optional wireless remote control.

3 Available only with optional wireless remote control.

4 Wi-Fi connectivity with Airstage Mobile App monitoring via compatible WLAN adapter.

## Function

Fujitsu AIRSTAGE Mid Static Pressure Duct indoor units deliver powerful heating and cooling with exceptional efficiency. Engineered for seamless integration into multi-zone applications, their compact design and strong static pressure enable flexible installation across various spaces. With enhanced airflow control and whisper-quiet operation, these units provide superior comfort while remaining discreetly concealed—offering the ideal combination of performance, versatility, and energy efficiency.




## Feature Highlights


- Wide external static pressure range of up to 0.8 inWG for adaptable performance. (12/18/24k models)
- Equipped with a built-in refrigerant leak detection sensor for enhanced safety and reliability.
- Flexible intake configuration with side or bottom options to meet installation requirements.
- Enhanced controls platform for seamless, intuitive operation.
- Built-in drain pump for efficient condensate removal making installation and maintenance easier
- Automatic static pressure detection for optimal airflow and system efficiency.
- ProCore™ (High Corrosion Resistant Copper) coils for long-lasting protection against corrosion
- (Optional) Supports compatibility with the Airzone (third-party communicating zoning system) for optimized zoning control.

## Energy Efficient & Quiet Operation

The combination of the V-shaped heat exchanger, air stabilizer, and the energy efficient DC fan motor results in high efficiency and quiet operation.

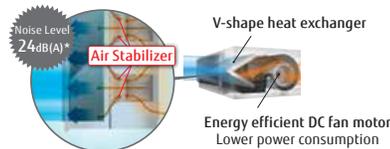

\* 12, 18, 24,000 BTUH models fan speed: Quiet

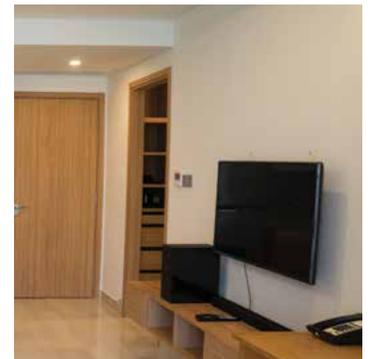

**OLDACH**  
REFRIGERATION, AIR CONDITIONING & VENTILATION SUPPLIER



ARUH12KUAS



ARUH18KUAS - ARUH24KUAS

Controllers not included. Controls sold separately.



UTY-RVRU



UTY-RNRUZ Series



UTY-RHRY

### Multi-Zone Indoor

		ARUH12KUAS	ARUH18KUAS	ARUH24KUAS
<b>Performance</b>				
Rated Cooling	BTU/h	12,000	18,000	24,000
Rated Heating	BTU/h	12,000	18,000	24,000
<b>Fan (Cooling Mode)</b>				
Air Circulation: Hi	CFM (m3/h)	500 (850)	618 (1,050)	800 (1,360)
Medium	CFM (m3/h)	400 (680)	494 (840)	636 (1,080)
Low	CFM (m3/h)	347 (590)	430 (730)	518 (880)
Quiet	CFM (m3/h)	300 (510)	371 (630)	400 (680)
Fan Speed Stages		4 + Auto	4+auto	4+auto
<b>Sound</b>				
Indoor Level (Clg/Htg): Hi	dB(A)	35/35	34/34	36/36
Medium	dB(A)	30/30	29/29	31/31
Low	dB(A)	27/27	26/26	28/28
Quiet	dB(A)	24/24	24/24	24/24
<b>Electrical</b>				
Voltage/Frequency/Phase		208-230/60/1	208-230/60/1	208-230/60/1
Static Pressure	W.C	0.12 to 0.80	0.12 to 0.80	0.12 to 0.80
Current Rated/Max: Clg	Amps	0.75/0.85	1.34/1.51	1.60/1.81
Current Rated/Max: Htg	Amps	0.75/0.85	1.34/1.51	1.60/1.81
Input Power	W	66	62	110
<b>Size &amp; Weight</b>				
Net Weight	lbs. (kg)	66 (30)	90 (41)	93 (42)
Dimensions: Height	Inch	11 13/16	11 13/16	11 13/16
	mm	300	300	300
Width	Inch	27 9/16	39 3/8	39 3/8
	mm	700	1000	1000
Depth	Inch	27 9/16	27 9/16	27 9/16
	mm	700	700	700
Supply Duct Flange Dimensions: Height	Inch	8-9/16	8-9/16	8-9/16
	mm	217	217	217
Width	Inch	18-3/16	30	30
	mm	462	762	762
Depth	Inch	1	1	1
	mm	25	25	25
Return Duct Dimensions: Height	Inch	10-1/16	10-1/16	10-1/16
	mm	255	255	255
Width	Inch	25-9/16	35-1/4	35-1/4
	mm	650	895	895
Depth	Inch	1	1	1
	mm	25	25	25
Refrigerant		R-32	R-32	R-32
<b>Additional Data</b>				
Air Filter Type		Washable	Washable	Washable
Lineset Size	Inch	Gas 3/8   Liq. 1/4	Gas 1/2   Liq. 1/4	Gas 1/2   Liq. 1/4



- a - Available only with optional wireless remote control.
- b - Available only with optional wired remote control.
- c - Wi-Fi connectivity with Airstage Mobile App monitoring via compatible WLAN adapter.

## AIRSTAGE

Oldach Associates, LLC. | Rev.(B) 5/2025  
Actual product color may be different from the colors shown here.

Product specifications as presented belong to the manufacturer. Specifications and design are subject to change without notice.